



The following document contains information on Cypress products. Although the document is marked with the name "Spansion" and "Fujitsu", the company that originally developed the specification, Cypress will continue to offer these products to new and existing customers.

Continuity of Specifications

There is no change to this document as a result of offering the device as a Cypress product. Any changes that have been made are the result of normal document improvements and are noted in the document history page, where supported. Future revisions will occur when appropriate, and changes will be noted in a document history page.

Continuity of Ordering Part Numbers

Cypress continues to support existing part numbers. To order these products, please use only the Ordering Part Numbers listed in this document.

For More Information

Please contact your local sales office for additional information about Cypress products and solutions.

About Cypress

Cypress (NASDAQ: CY) delivers high-performance, high-quality solutions at the heart of today's most advanced embedded systems, from automotive, industrial and networking platforms to highly interactive consumer and mobile devices. With a broad, differentiated product portfolio that includes NOR flash memories, F-RAM™ and SRAM, Traveo™ microcontrollers, the industry's only PSoC® programmable system-on-chip solutions, analog and PMIC Power Management ICs, CapSense® capacitive touch-sensing controllers, and Wireless BLE Bluetooth® Low-Energy and USB connectivity solutions, Cypress is committed to providing its customers worldwide with consistent innovation, best-in-class support and exceptional system value.

16-bit Microcontroller

CMOS

F²MC-16LX MB90800 Series

**MB90803/803S/F803/F803S/F804-101/
MB90F804-201/F809/F809S/V800**

■ DESCRIPTION

The MB90800 series is a general-purpose 16-bit microcontroller that has been developed for high-speed real-time processing required for industrial and office automation equipment and process control, etc. The LCD controller of 48 segment four common is built into.

Instruction set has taken over the same AT architecture as in the F²MC-8L and F²MC-16L, and is further enhanced to support high level languages, extend addressing mode, enhanced divide/multiply instructions with sign and enrichment of bit processing. In addition, long word processing is now available by introducing a 32-bit accumulator.

Note: F²MC is the abbreviation of Fujitsu Flexible Microcontroller.

■ FEATURES

• Clock

- Built-in PLL clock frequency multiplication circuit
- Operating clock (PLL clock) : divided-by-2 of oscillation (at oscillation of 6.25 MHz) or
1 to 4 times the oscillation (at oscillation of 6.25 MHz to 25 MHz).
- Minimum instruction execution time of 40.0 ns (at oscillation of 6.25 MHz, four times the PLL clock, operation at V_{CC} = 3.3 V)

• The maximum memory space:16 Mbytes

- 24-bit internal addressing
- Bank addressing

(Continued)

For the information for microcontroller supports, see the following web site.

<http://edevice.fujitsu.com/micom/en-support/>

MB90800 Series

(Continued)

- **Optimized instruction set for controller applications**
 - Wide choice of data types (bit, byte, word, and long word)
 - Wide choice of addressing modes (23 types)
 - High code efficiency
 - Enhanced high-precision computing with 32-bit accumulator
 - Enhanced Multiply/Divide instructions with sign and the RETI instruction
- **Instruction system compatible with high-level language (C language) and multitask**
 - Employing system stack pointer
 - Instruction set has symmetry and barrel shift instructions
- **Program Patch Function (2 address pointer)**
- **4-byte instruction queue**
- **Interrupt function**
 - The priority level can be set to programmable.
 - Interrupt function with 32 factors
- **Data transfer function**
 - Expanded intelligent I/O service function (EI²OS): Maximum of 16 channels
- **Low Power Consumption Mode**
 - Sleep mode (a mode that halts CPU operating clock)
 - Time-base timer mode (a mode that operates oscillation clock and time-base timer)
 - Watch mode (mode in which only the subclock and watch timers operate)
 - Stop mode (a mode that stops oscillation clock and sub clock)
 - CPU blocking mode (operating CPU at each set cycle)
- **Package**
 - QFP-100 (FPT-100P-M06 : 0.65 mm lead pitch)
- **Process : CMOS technology**

MB90800 Series

■ PRODUCT LINEUP

| Part number | MB90V800-101/201 | MB90F804-101/201 | MB90803/MB90803S | MB90F803/MB90F803S | MB90F809/MB90F809S |
|----------------------------|---|--|--|---------------------------|--------------------|
| Type | Evaluation product | Flash memory products | Mask ROM products | Flash memory products | |
| System clock | On-chip PLL clock multiplication method (× 1, × 2, × 3, × 4, 1/2 when PLL stops) Minimum instruction execution time of 40.0 ns (at oscillation of 6.25 MHz, four times the PLL clock) | | | | |
| Sub clock | With sub clock: 201 option Without sub clock: 101 option | | With sub clock: Part number of products without "S" suffix Without sub clock: Part number of products with "S" suffix | | |
| ROM capacity | No | 256 Kbytes | 128 Kbytes | 128 Kbytes dual operation | 192 Kbytes |
| RAM capacity | 28 Kbytes | 16 Kbytes | 4 Kbytes | 4 Kbytes | 10 Kbytes |
| CPU functions | Number of basic instructions : 351 Minimum instruction execution time : 40.0 ns/6.25 MHz oscillator (When four times is used : machine clock 25 MHz, Power supply voltage : 3.3 V ± 0.3 V) Addressing type : 23 types Program Patch Function : 2 address pointers The maximum memory space : 16 Mbytes | | | | |
| Ports | I/O port (CMOS) 68 ports (shared with resources), (70 ports when the subclock is not used) | | | | |
| LCD controller/driver | Segment driver that can drive the LCD panel (liquid crystal display) directly, and common driver 48 SEG × 4 COM | | | | |
| 16-bit input/output timer | 16-bit free-run timer | 1 channel Overflow interrupt | | | |
| | Output compare (OCU) | 2 channels Pin input factor: matching of the compare register | | | |
| | Input capture (ICU) | 2 channels Rewriting a register value upon a pin input (rising edge, falling edge, or both edges) | | | |
| 16-bit Reload Timer | 16-bit reload timer operation (toggle output, single shot output selectable) The event count function is optional. The event count function is optional. Three channels are built in. | | | | |
| 16-bit PPG timer | Output pin × 2 ports Operating clock frequency : fcp, fcp/22, fcp/24, fcp/26 Two channels are built in. | | | | |
| Time-base timer | 1 channel | | | | |
| Watchdog timer | 1 channel | | | | |
| Timer clock output circuit | Clock with a frequency of external input clock divided by 16/32/64/128 can be output externally. | | | | |
| I ² C bus | I ² C Interface. 1 channel is built-in. | | | | |


(Continued)

MB90800 Series

(Continued)

| Part number Item | MB90V800- 101/201 | MB90F804- 101/201 | MB90803/ MB90803S | MB90F803/ MB90F803S | MB90F809/ MB90F809S |
|----------------------------------|--|----------------------|----------------------|------------------------|------------------------|
| 8/10-bit A/D converter | 12 channels (input multiplex) The 8-bit resolution or 10-bit resolution can be set. Conversion time : 5.9 μ s (When machine clock 16.8 MHz works). | | | | |
| UART | Full-duplex double buffer Asynchronous/synchronous transmit (with start/stop bits) are supported. Two channels are built in. | | | | |
| Extended I/O serial interface | Two channels are built in. | | | | |
| Interrupt delay interrupt | One channel | | | | |
| DTP/External interrupt | 4 channels Interrupt causes : "L" \rightarrow "H" edge/"H" \rightarrow "L" edge/"L" level/"H" level selectable | | | | |
| Low Power Consumption Mode | Sleep mode/Time-base timer mode/Watch mode/Stop mode/CPU intermittent mode | | | | |
| Process | CMOS | | | | |
| Operating voltage | 2.7 V to 3.6 V | | | | |

PIN ASSIGNMENT

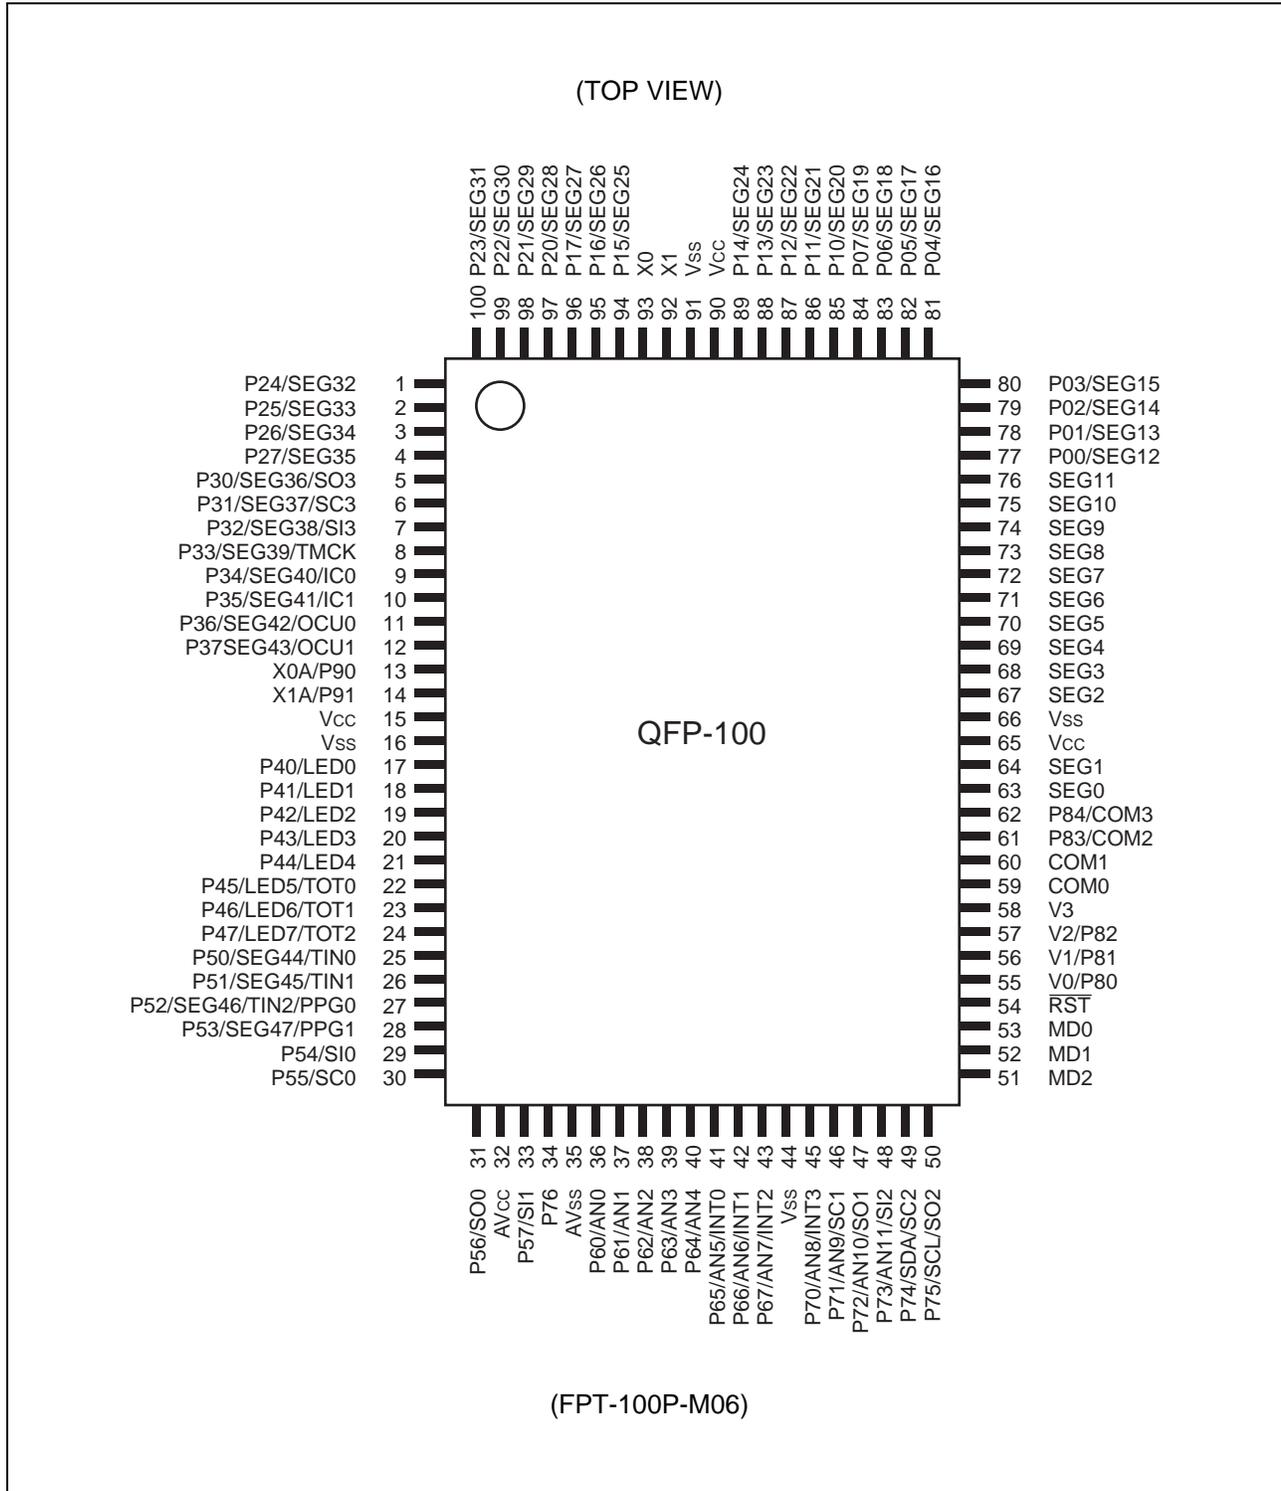

MB90800 Series

■ PIN DESCRIPTION

| Pin No. | Pin Name | I/O Circuit Type* | Status/function at reset | Function |
|--------------------|-------------------------|-------------------|--|--|
| 92, 93 | X1, X0 | A | Oscillation status | It is a terminal which connects the oscillator. When connecting an external clock, leave the x1 pin unconnected. |
| 13, 14 | X0A, X1A | B | Oscillation status | It is 32 kHz oscillation pin. (Dual-line model) |
| | P90, P91 | G | Port input (High-Z) | General purpose input/output port. (Single-line model) |
| 51 | MD2 | M | Mode Pins | Input pin for selecting operation mode. Connect directly to Vss. |
| 52, 53 | MD1, MD0 | L | Mode Pins | Input pin for selecting operation mode. Connect directly to Vcc. |
| 54 | $\overline{\text{RST}}$ | K | Reset input | External reset input pin. |
| 63, 64, 67 to 76 | SEG0 to SEG11 | D | LCD SEG output | A segment output terminal of the LCD controller/driver. |
| 77 to 84 | SEG12 to SEG19 | E | Port input (High-Z) | A segment output terminal of the LCD controller/driver. |
| | P00 to P07 | | | General purpose input/output port. |
| 85 to 89, 94 to 96 | SEG20 to SEG27 | E | | A segment output terminal of the LCD controller/driver. |
| | P10 to P17 | | | General purpose input/output port. |
| 97 to 100, 1 to 4 | SEG28 to SEG35 | E | | A segment output terminal of the LCD controller/driver. |
| | P20 to P27 | | | General purpose input/output port. |
| 5 | SEG36 | E | | A segment output terminal of the LCD controller/driver. |
| | P30 | | | General purpose input/output port. |
| | SO3 | | | Serial data output pin of serial I/O ch.3. Valid when serial data output of serial I/O ch.3 is enabled. |
| 6 | SEG37 | E | | A segment output terminal of the LCD controller/driver. |
| | P31 | | General purpose input/output port. | |
| | SC3 | | Serial clock I/O pin of serial I/O ch.3. Valid when serial clock output of serial I/O ch.3 is enabled. | |

(Continued)

MB90800 Series

| Pin No. | Pin Name | I/O Circuit Type* | Status/function at reset | Function |
|----------|--------------|-------------------|---|---|
| 7 | SEG38 | E | Port input (High-Z) | A segment output terminal of the LCD controller/driver. |
| | P32 | | | General purpose input/output port. |
| | SI3 | | | Serial data input pin of serial I/O ch.3. This pin may be used during serial I/O ch.3 in input mode, so it cannot use as other pin function. |
| 8 | SEG39 | E | | A segment output terminal of the LCD controller/driver. |
| | P33 | | | General purpose input/output port. |
| | TMCK | | | Timer clock output pin. It is effective when permitting the power output. |
| 9, 10 | SEG40, SEG41 | E | | A segment output terminal of the LCD controller/driver. |
| | P34, P35 | | | General purpose input/output port. |
| | IC0, IC1 | | | External trigger input pin of input capture ch.0/ch.1. |
| 11, 12 | SEG42, SEG43 | E | | A segment output terminal of the LCD controller/driver. |
| | P36, P37 | | General purpose input/output port. | |
| | OCU0, OCU1 | | Output terminal for the output compares ch.0/ch.1. | |
| 17 to 21 | LED0 to LED4 | F | It is a output terminal for LED ($I_{OL} = 15 \text{ mA}$). | |
| | P40 to P44 | | General purpose input/output port. | |
| 22 to 24 | LED5 to LED7 | F | It is a output terminal for LED ($I_{OL} = 15 \text{ mA}$). | |
| | P45 to P47 | | General purpose input/output port. | |
| | TOT0 to TOT2 | | External event output pin of reload timer ch.0 to ch.2. It is effective when permitting the external event output. | |
| 25, 26 | SEG44, SEG45 | E | A segment output terminal of the LCD controller/driver. | |
| | P50, P51 | | General purpose input/output port. | |
| | TIN0, TIN1 | | External clock input pin of reload timer ch.0, ch.1. It is effective when permitting the external clock input. | |

(Continued)

MB90800 Series

| Pin No. | Pin Name | I/O Circuit Type* | Status/function at reset | Function |
|----------|------------|-------------------|--|--|
| 27 | SEG46 | E | Port input (High-Z) | A segment output terminal of the LCD controller/driver. |
| | P52 | | | General purpose input/output port. |
| | TIN2 | | | External clock input pin of reload timer ch.2. It is effective when permitting the external clock input. |
| | PPG0 | | | PPG timer (ch.0) output pin. |
| 28 | SEG47 | E | | A segment output terminal of the LCD controller/driver. |
| | P53 | | | General purpose input/output port. |
| | PPG1 | | | PPG (ch.1) timer output pin. |
| 29 | SIO | G | | Serial data input pin of UART ch.0. This pin may be used during UART ch.0 in receiving mode, so it cannot use as other pin function. |
| | P54 | | | General purpose input/output port. |
| 30 | SC0 | G | | Serial clock input/output pin of UART ch.0. It is effective when permitting the serial clock output of UART ch.0. |
| | P55 | | General purpose input/output port. | |
| 31 | SO0 | G | Serial data output pin of UART ch.0. It is effective when permitting the serial clock output of UART ch.0. | |
| | P56 | | General purpose input/output port. | |
| 33 | SI1 | G | Serial data input pin of UART ch.1. This pin may be used during UART ch.1 in receiving mode, so it cannot use as other pin function. | |
| | P57 | | General purpose input/output port. | |
| 34 | P76 | G | General purpose input/output port. | |
| 36 to 40 | AN0 to AN4 | I | Analog input pin ch.0 to ch.4 of A/D converter. Enabled when analog input setting is "enabled"(set by ADER). | |
| | P60 to P64 | | General purpose input/output port. | |

(Continued)

| Pin No. | Pin Name | I/O Circuit Type* | Status/function at reset | Function |
|----------|--------------|-------------------|--------------------------|--|
| 41 to 43 | AN5 to AN7 | I | Analog input (High-Z) | Analog input pin ch.5 to ch.7 of A/D converter. Enabled when analog input setting is "enabled". |
| | P65 to P67 | | | General purpose input/output port. |
| | INT0 to INT2 | | | Functions as an external interrupt ch.0 to ch.2 input pin. |
| 45 | AN8 | I | | Analog input pin ch.8 of A/D converter. Enabled when analog input setting is "enabled". |
| | P70 | | | General purpose input/output port. |
| | INT3 | | | Functions as an external interrupt ch.3 input pin. |
| 46 | AN9 | I | | Analog input pin ch.9 of A/D converter. Enabled when analog input setting is "enabled". |
| | P71 | | | General purpose input/output port. |
| | SC1 | | | Serial clock input/output pin of UART ch.1. It is effective when permitting the serial clock output of UART ch.1. |
| 47 | AN10 | I | Port input (High-Z) | Analog input pin ch.10 of A/D converter. Enabled when analog input setting is "enabled". |
| | P72 | | | General purpose input/output port. |
| | SO1 | | | Serial data output pin of serial I/O ch.1. Valid when serial data output of serial I/O ch.1 is enabled. |
| 48 | AN11 | I | | Analog input pin ch.11 of A/D converter. Enabled when analog input setting is "enabled". |
| | P73 | | | General purpose input/output port. |
| | SI2 | | | Serial data input pin of serial I/O ch.2. This pin may be used during serial I/O ch.2 in input mode, so it cannot use as other pin function. |

(Continued)

MB90800 Series

(Continued)

| Pin No. | Pin Name | I/O Circuit Type* | Status/function at reset | Function |
|----------------|------------------|-------------------|------------------------------|---|
| 49 | SDA | H | Port input (High-Z) | Data input/output pin of I ² C Interface. This pin is enabled when the I ² C interface is operated. While the I ² C interface is running, the port must be set for input use. |
| | P74 | | | General purpose input/output port. (N-ch open-drain, withstand voltage of 5 V.) |
| | SC2 | | | Serial clock input pin of serial I/O ch.2. Valid when serial clock output of serial I/O ch.2 is enabled. |
| 50 | SCL | H | | Clock input/output pin of I ² C Interface. This pin is enabled when the I ² C interface is operated. While the I ² C interface is running, the port must be set for input use. |
| | P75 | | | General purpose input/output port. (N-ch open-drain, withstand voltage of 5 V.) |
| | SO2 | | | Serial data output pin of serial I/O ch.2. Valid when serial data output of serial I/O ch.2 is enabled. |
| 55 to 57 | V0 to V2 | J | LCD drive power supply input | LCD controller/driver. Reference power terminals of LCD controller/driver. |
| | P80 to P82 | | | General purpose input/output port. |
| 59, 60 | COM0, COM1 | D | LCD COM output | A common output terminal of the LCD controller/driver. |
| 61, 62 | P83, P84 | E | Port input (High-Z) | General purpose input/output port. |
| | COM2, COM3 | | | A common output terminal of the LCD controller/driver. |
| 32 | AV _{CC} | C | Power supply | A/D converter exclusive power supply input pin. |
| 35 | AV _{SS} | C | | A/D converter-exclusive GND power supply pin. |
| 58 | V3 | J | | LCD controller/driver Reference power terminals of LCD controller/driver. |
| 15, 65, 90 | V _{CC} | — | | These are power supply input pins. |
| 16, 44, 66, 91 | V _{SS} | — | | GND power supply pin. |

* : Refer to “■ I/O CIRCUIT TYPE” for details on the I/O circuit types.

■ I/O CIRCUIT TYPE

| Type | Circuit | Remarks |
|------|---------|---|
| A | | Oscillation feedback resistance : 1 MΩ approx. |
| B | | Low-rate oscillation feedback resistor, approx.10 MΩ |
| C | | Analog power supply input protection circuit |
| D | | LCDC output |
| E | | <ul style="list-style-type: none"> • CMOS output • LCDC output • CMOS hysteresis input (With input interception function at standby) |





(Continued)

MB90800 Series

| Type | Circuit | Remarks |
|------|--|--|
| F | <p>CMOS hysteresis input Standby control signal</p> | <ul style="list-style-type: none"> • CMOS output (Heavy-current $I_{OL} = 15$ mA for LED drive) • CMOS hysteresis input (With input interception function at standby) |
| G | <p>CMOS hysteresis input Standby control signal</p> | <ul style="list-style-type: none"> • CMOS output • CMOS hysteresis input (With input interception function at standby) <p>Notes :</p> <ul style="list-style-type: none"> • The I/O port and internal resources share one output buffer for their outputs. • The I/O port and internal resources share one input buffer for their input. |
| H | <p>Nout CMOS hysteresis input Standby control signal</p> | <ul style="list-style-type: none"> • CMOS hysteresis input (With input interception function at standby) • N-ch open drain output |
| I | <p>CMOS hysteresis input Standby control signal A/D converter Analog input</p> | <ul style="list-style-type: none"> • CMOS output • CMOS hysteresis input (With input interception function at standby) • Analog input (If the bit of analog input enable register = 1, the analog input of A/D converter is enabled.) <p>Notes :</p> <ul style="list-style-type: none"> • The I/O port and internal resources share one output buffer for their outputs. • The I/O port and internal resources share one input buffer for their inputs. |

(Continued)

(Continued)
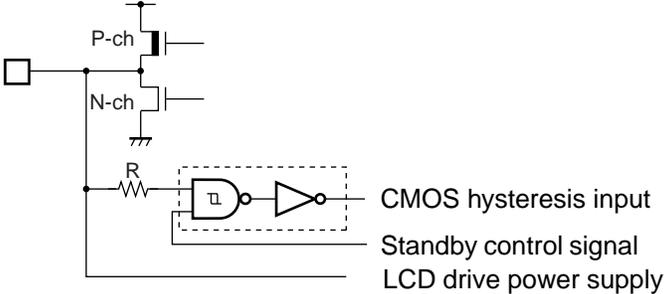
| Type | Circuit | Remarks |
|------|---|--|
| J |  | <ul style="list-style-type: none"> • CMOS output • CMOS hysteresis input (With input interception function at standby) • LCD drive power supply input |
| K |  | CMOS hysteresis input with pull-up resistor. |
| L |  | CMOS hysteresis input |
| M |  | CMOS hysteresis input with pull-down resistor |

MB90800 Series

■ HANDLING DEVICES

1. Preventing Latch-up, Turning on Power Supply

Latch-up may occur on CMOS IC under the following conditions:

- If a voltage higher than V_{CC} or lower than V_{SS} is applied to input and output pins,
- A voltage higher than the rated voltage is applied between V_{CC} pin and V_{SS} pin.
- If the AV_{CC} power supply is turned on before the V_{CC} voltage.

Ensure that you apply a voltage to the analog power supply at the same time as V_{CC} or after you turn on the digital power supply (when you perform power-off, turn off the analog power supply first or at the same time as V_{CC} and the digital power supply).

When latch-up occurs, power supply current increases rapidly and might thermally damage elements. When using CMOS IC, take great care to prevent the occurrence of latch-up.

2. Treatment of unused pins

If unused input pins are left open, they may cause abnormal operation or latch-up which may lead to permanent damage to the semiconductor. Any such pins should be pulled up or pulled down through resistance of at least 2 k Ω .

Any unused input/output pins should be left open in output status, or if found set to input status, they should be treated in the same way as input pins.

Any unused output pins should be left open.


3. Treatment of A/D converter power supply pins

Even if the A/D converter is not used, pins should be connected so that $AV_{CC} = V_{CC}$, and $AV_{SS} = V_{SS}$.

4. About the attention when the external clock is used


In using an external clock, drive pin X0 only and leave pin X1 open.

The example of using an external clock is shown below.

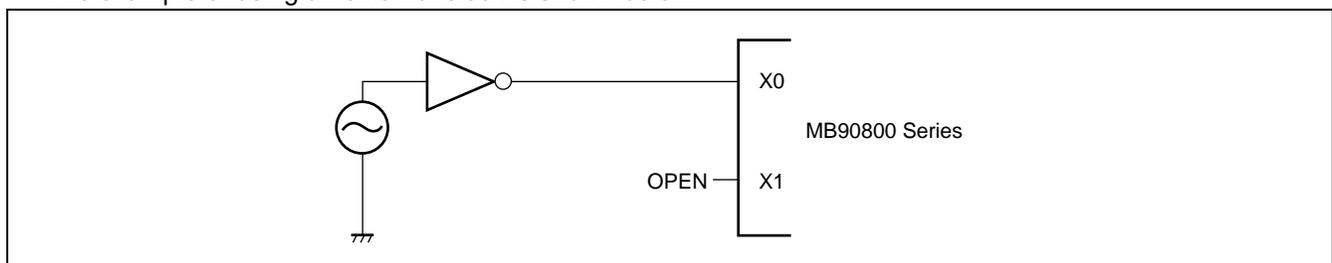

Please set X0A = GND and X1A = open without subclock mode.

The following figure shows the using sample.

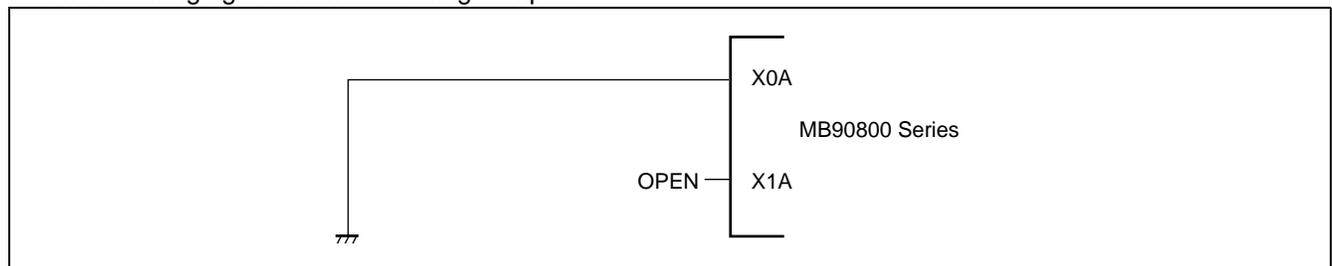

5. Treatment of power supply pins (V_{CC}/V_{SS})

In products with multiple V_{CC} or V_{SS} pins, the pins of the same potential are internally connected in the device to avoid abnormal operations including latch-up. However, you must connect all power supply pins to external power supply and a ground line to lower the electro-magnetic emission level, to prevent abnormal operation of strobe signals caused by the rise in the ground level, and to conform to the total output current rating.

Moreover, connect the current supply source with the V_{CC} and V_{SS} pins of this device at the low impedance.

It is also advisable to connect a ceramic capacitor of approximately 0.1 μF as a bypass capacitor between V_{CC} and V_{SS} near this device.

6. About Crystal oscillators circuit

Noise near the X0/X1 pins and X0A/X1A pins may cause the device to malfunction. Design the printed circuit board so that X0/X1 pins and X0A/X1A pins, the crystal oscillator (or the ceramic oscillator) and the bypass capacitor to ground are located as close to the device as possible.

It is strongly recommended to design the PC board artwork with the X0/X1 pins and X0A/X1A pins surrounded by ground plane because stable operation can be expected with such a layout.

Please ask the crystal maker to evaluate the oscillational characteristics of the crystal and this device.

7. Caution on Operations during PLL Clock Mode

On this microcontroller, if in case the crystal oscillator breaks off or an external reference clock input stops while the PLL clock mode is selected, a self-oscillator circuit contained in the PLL may continue its operation at its self-running frequency. However, Fujitsu will not guarantee results of operations if such failure occurs.

8. Stabilization of Supply Power Supply

A sudden change in the supply voltage may cause the device to malfunction even within the V_{CC} supply voltage operating range. Therefore, the V_{CC} supply voltage should be stabilized. For reference, the supply voltage should be controlled so that V_{CC} ripple variations (peak- to-peak values) at commercial frequencies (50 Hz/60 Hz) fall below 10% of the standard V_{CC} supply voltage and the coefficient of fluctuation does not exceed 0.1 V/ms at instantaneous power switching.

9. Note on Using the two-subsystem product as one-subsystem product


If you are using only one subsystem of the MB90800 series that come in one two-subsystem product, use it with X0A = V_{SS} and X1A = OPEN.

10. Write to FLASH


Ensure that you must write to FLASH at the operating voltage $V_{CC} = 3.0 \text{ V}$ to 3.6 V.

MB90800 Series

■ BLOCK DIAGRAM

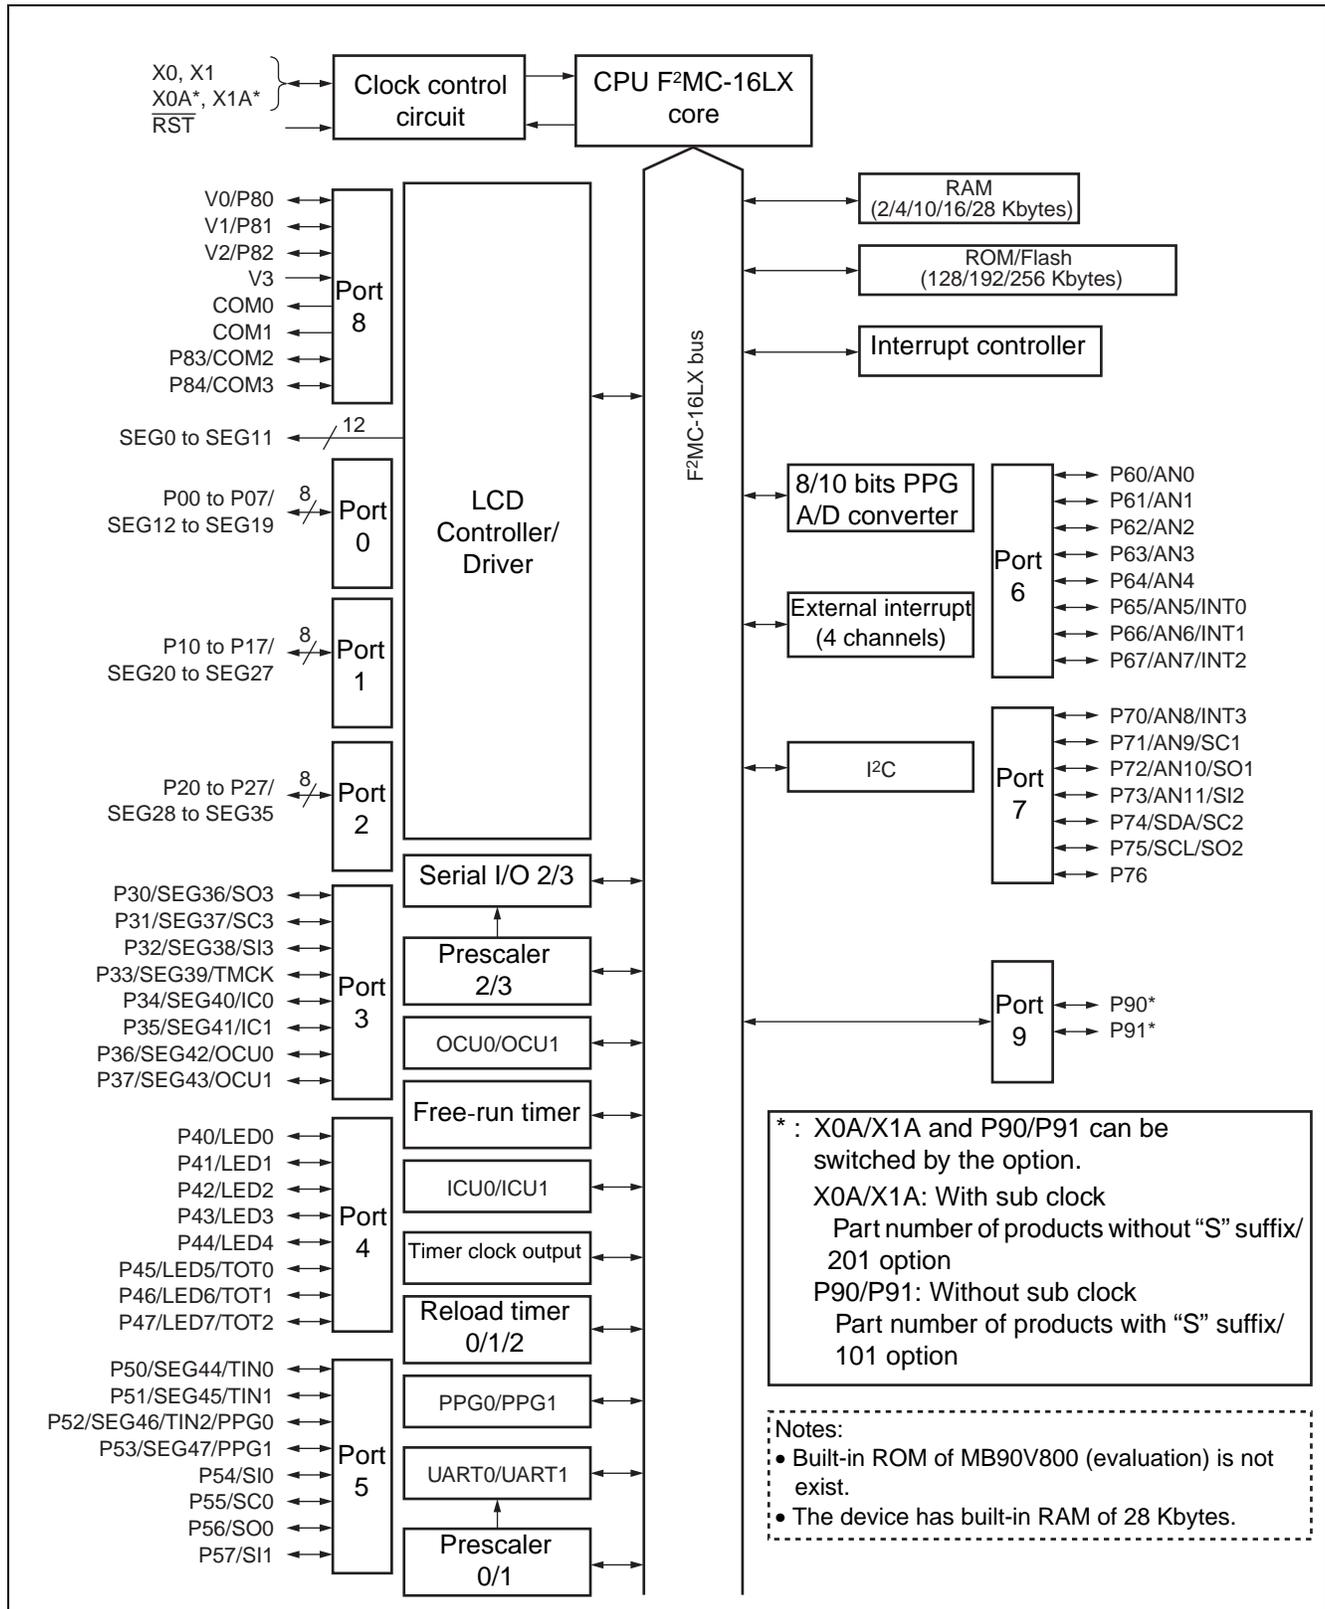

■ MEMORY MAP

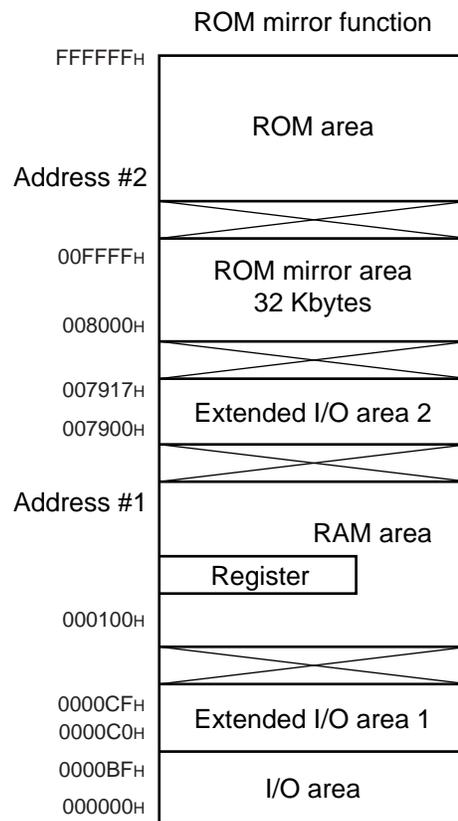

| Part number | Address #1 | Address #2 |
|--------------------------|---------------------|-----------------------|
| MB90803/S, MB90F803/S | 0010FF _H | FE0000 _H |
| MB90F809/S | 0028FF _H | FD0000 _H |
| MB90F804-101/201 | 0040FF _H | FC0000 _H |
| MB90V800-101/201 | 0070FF _H | F80000 _H * |

* : ROM is not built into MB90V800.
F80000_H is ROM decipherment region on the tool side.


Memory Map of MB90800 Series

- Notes :
- When the ROM mirror function register has been set, the mirror image data at higher addresses ("FF4000_H to FFFFFFF_H") of bank FF is visible from the higher addresses ("008000_H to 00FFFF_H") of bank 00.
 - The ROM mirror function is for using the C compiler small model.
 - The lower 16-bit addresses of bank FF are equivalent to those of bank 00. Note that because the ROM area of bank FF exceeds 32 Kbytes, all data in the ROM area cannot be shown in mirror image in bank 00.
 - When the C compiler small model is used, the data table can be shown as mirror image at "008000_H to 00FFFF_H" by storing the data table at "FF8000_H to FFFFFFF_H". Therefore, data tables in the ROM area can be referenced without declaring the far addressing with the pointer.


MB90800 Series

■ F²MC-16L CPU Programming model


• Dedicated Registers

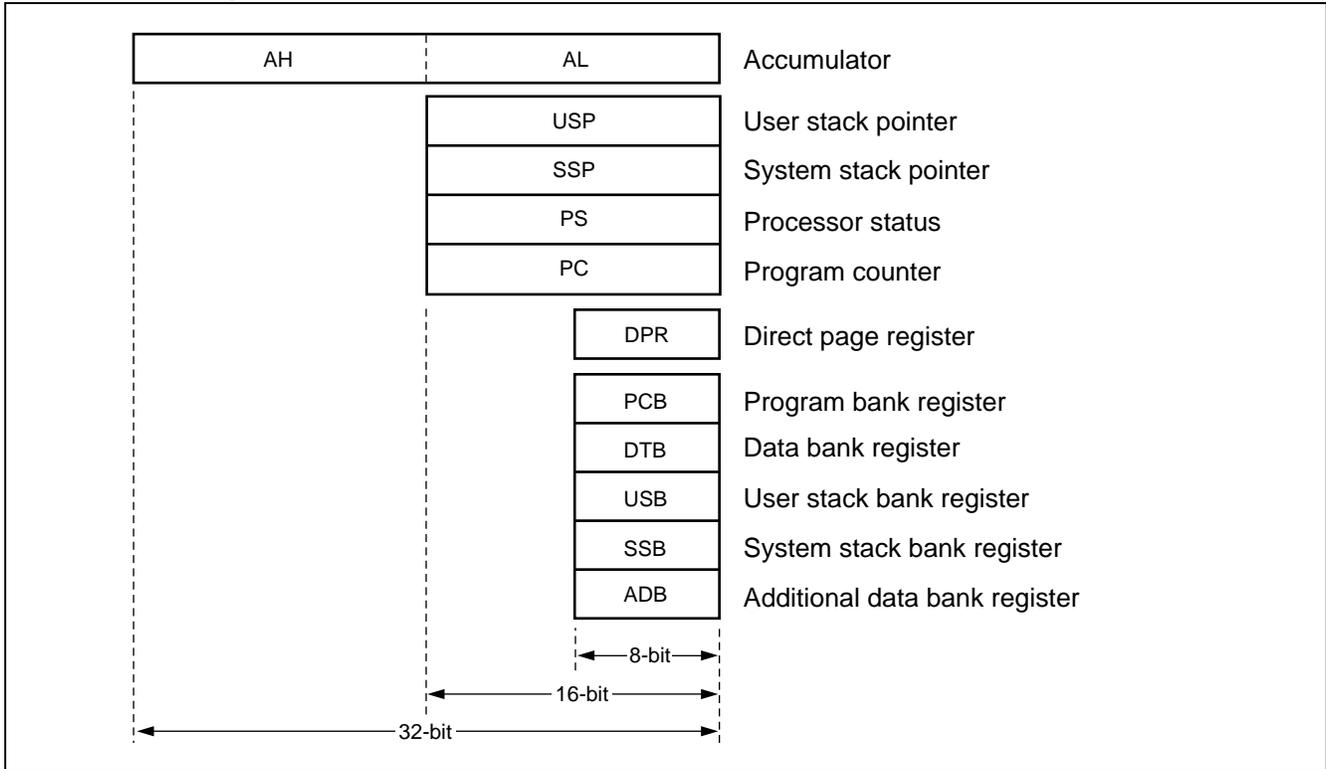

• General purpose registers

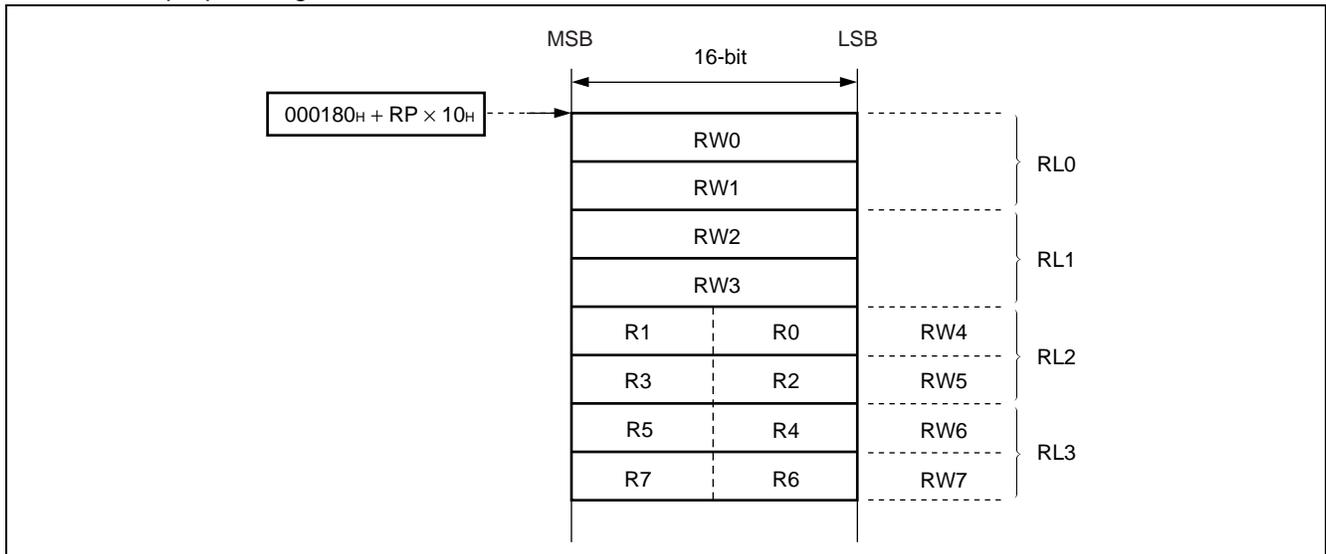

• Processor status

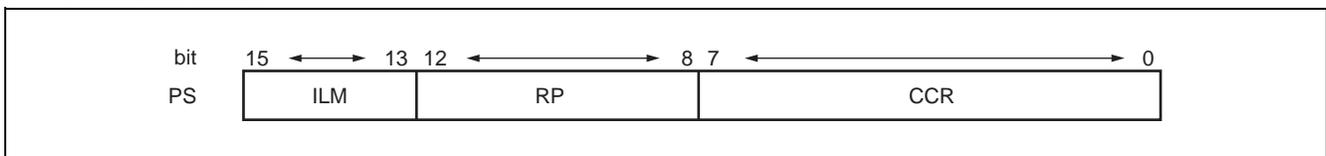

■ I/O MAP

| Address | Register abbreviation | Register | Read/Write | Resource name | Initial Value |
|--|-----------------------|--|------------|---------------|------------------------|
| 000000 _H | PDR0 | Port 0 data register | R/W | Port 0 | XXXXXXXX _B |
| 000001 _H | PDR1 | Port 1 data register | R/W | Port 1 | XXXXXXXX _B |
| 000002 _H | PDR2 | Port 2 data register | R/W | Port 2 | XXXXXXXX _B |
| 000003 _H | PDR3 | Port 3 data register | R/W | Port 3 | XXXXXXXX _B |
| 000004 _H | PDR4 | Port 4 data register | R/W | Port 4 | XXXXXXXX _B |
| 000005 _H | PDR5 | Port 5 data register | R/W | Port 5 | XXXXXXXX _B |
| 000006 _H | PDR6 | Port 6 data register | R/W | Port 6 | XXXXXXXX _B |
| 000007 _H | PDR7 | Port 7 data register | R/W | Port 7 | -XXXXXXXX _B |
| 000008 _H | PDR8 | Port 8 data register | R/W | Port 8 | ---XXXX _B |
| 000009 _H | PDR9 | Port 9 data register | R/W | Port 9 | -----XX _B |
| 00000A _H to 00000F _H | Prohibited | | | | |
| 000010 _H | DDR0 | Port 0 direction register | R/W | Port 0 | 00000000 _B |
| 000011 _H | DDR1 | Port 1 direction register | R/W | Port 1 | 00000000 _B |
| 000012 _H | DDR2 | Port 2 direction register | R/W | Port 2 | 00000000 _B |
| 000013 _H | DDR3 | Port 3 direction register | R/W | Port 3 | 00000000 _B |
| 000014 _H | DDR4 | Port 4 direction register | R/W | Port 4 | 00000000 _B |
| 000015 _H | DDR5 | Port 5 direction register | R/W | Port 5 | 00000000 _B |
| 000016 _H | DDR6 | Port 6 direction register | R/W | Port 6 | 00000000 _B |
| 000017 _H | DDR7 | Port 7 direction register | R/W | Port 7 | -0000000 _B |
| 000018 _H | DDR8 | Port 8 direction register | R/W | Port 8 | ---00000 _B |
| 000019 _H | DDR9 | Port 9 direction register | R/W | Port 9 | -----00 _B |
| 00001A _H to 00001D _H | Prohibited | | | | |
| 00001E _H | ADER0 | Analog input enable 0 register | R/W | Port 6, A/D | 11111111 _B |
| 00001F _H | ADER1 | Analog input enable 1 register | R/W | Port 7, A/D | ----1111 _B |
| 000020 _H | SMR0 | Serial mode register | R/W | UART0 | 00000-00 _B |
| 000021 _H | SCR0 | Serial control register | R/W | | 00000100 _B |
| 000022 _H | SIDR0/ SODR0 | Serial input/output register | R/W | | XXXXXXXX _B |
| 000023 _H | SSR0 | Serial data register | R/W | | 00001000 _B |
| 000024 _H | Prohibited | | | | |
| 000025 _H | CDCR0 | Communication prescaler control register | R/W | Prescaler 0 | 00--0000 _B |
| 000026 _H 000027 _H | Prohibited | | | | |

(Continued)

MB90800 Series

| Address | Register abbreviation | Register | Read/Write | Resource name | Initial Value |
|--|-----------------------|---|------------|-----------------------|------------------------------|
| 000028 _H | SMR1 | Serial mode register | R/W | UART1 | 0 0 0 0 0 - 0 0 _B |
| 000029 _H | SCR1 | Serial control register | R/W, W | | 0 0 0 0 0 1 0 0 _B |
| 00002A _H | SIDR1/ SODR1 | Serial input/output register | R/W | | XXXXXXXX _B |
| 00002B _H | SSR1 | Serial data register | R/W, R | | 0 0 0 0 1 0 0 0 _B |
| 00002C _H | Prohibited | | | | |
| 00002D _H | CDCR1 | Communication prescaler control register | R/W | Prescaler 1 | 0 0 - - 0 0 0 0 _B |
| 00002E _H | Prohibited | | | | |
| 00002F _H | Prohibited | | | | |
| 000030 _H | ENIR | Interrupt/DTP enable | R/W | External interrupt | - - - - 0 0 0 0 _B |
| 000031 _H | EIRR | Interrupt/DTP source | R/W | | - - - - XXXX _B |
| 000032 _H | ELVR | Request level set register | R/W | | 0 0 0 0 0 0 0 0 _B |
| 000033 _H | Prohibited | | | | |
| 000034 _H | ADCS0 | Control status register (lower) | R/W | A/D converter | 0 0 - - - - - B |
| 000035 _H | ADCS1 | Control status register (upper) | W, R/W | | 0 0 0 0 0 0 0 0 _B |
| 000036 _H | ADCR0 | Data register (lower) | R | | XXXXXXXX _B |
| 000037 _H | ADCR1 | Data register (upper) | R, W | | 0 0 1 0 1 - XX _B |
| 000038 _H | Prohibited | | | | |
| 000039 _H | ADMR | A/D conversion channel set register | R/W | A/D converter | 0 0 0 0 0 0 0 0 _B |
| 00003A _H | CPCLR | Compare clear register | R/W | 16-bit free-run timer | XXXXXXXX _B |
| 00003B _H | | | | | XXXXXXXX _B |
| 00003C _H | TCDT | Timer counter data register | R/W | | 0 0 0 0 0 0 0 0 _B |
| 00003D _H | | | | | 0 0 0 0 0 0 0 0 _B |
| 00003E _H | TCCSL | Timer counter control/status register (lower) | R/W | | 0 0 0 0 0 0 0 0 _B |
| 00003F _H | TCCSH | Timer counter control/status register (upper) | R/W | | 0 - - 0 0 0 0 0 _B |
| 000040 _H to 000043 _H | Prohibited | | | | |
| 000044 _H | IPCP0 | Input capture data register 0 | R | Input Capture 0/1 | XXXXXXXX _B |
| 000045 _H | | | | | XXXXXXXX _B |
| 000046 _H | IPCP1 | Input capture data register 1 | | | XXXXXXXX _B |
| 000047 _H | | | | | XXXXXXXX _B |
| 000048 _H | ICS01 | Control status register | R/W | | 0 0 0 0 0 0 0 0 _B |
| 000049 _H | Prohibited | | | | |
| 00004A _H | OCCP0 | Compare register 0 | R/W | Output compare 0 | 0 0 0 0 0 0 0 0 _B |
| 00004B _H | | | | | 0 0 0 0 0 0 0 0 _B |
| 00004C _H | OCCP1 | Compare register 1 | R/W | Output compare 1 | 0 0 0 0 0 0 0 0 _B |
| 00004D _H | | | | | 0 0 0 0 0 0 0 0 _B |

(Continued)

MB90800 Series

| Address | Register abbreviation | Register | Read/Write | Resource name | Initial Value |
|---------------------|-----------------------|--|------------|-------------------------------|------------------------------|
| 00004E _H | OCSL | Control status register (lower) | R/W | Output Compare 0/1 | 0 0 0 0 -- 0 0 _B |
| 00004F _H | OCSH | Control status register (upper) | R/W | | -- 0 0 0 0 0 _B |
| 000050 _H | TMCSR0L | Timer control status register (lower) | R/W | 16-bit reload timer 0 | 0 0 0 0 0 0 0 0 _B |
| 000051 _H | TMCSR0H | Timer control status register (upper) | R/W | | -- -- 0 0 0 0 _B |
| 000052 _H | TMR0/ TMRLR0 | 16-bit timer register/Reload register | R/W | | XXXXXXXX _B |
| 000053 _H | | | | | XXXXXXXX _B |
| 000054 _H | TMCSR1L | Timer control status register (lower) | R/W | 16-bit reload timer 1 | 0 0 0 0 0 0 0 0 _B |
| 000055 _H | TMCSR1H | Timer control status register (upper) | R/W | | -- -- 0 0 0 0 _B |
| 000056 _H | TMR1/ TMRLR1 | 16-bit timer register/Reload register | R/W | | XXXXXXXX _B |
| 000057 _H | | | | | XXXXXXXX _B |
| 000058 _H | TMCSR2L | Timer control status register (lower) | R/W | 16-bit reload timer 2 | 0 0 0 0 0 0 0 0 _B |
| 000059 _H | TMCSR2H | Timer control status register (upper) | R/W | | -- -- 0 0 0 0 _B |
| 00005A _H | TMR2/ TMRLR2 | 16-bit timer register/Reload register | R/W | | XXXXXXXX _B |
| 00005B _H | | | | | XXXXXXXX _B |
| 00005C _H | LCRL | LCDC control register (lower) | R/W | LCD controller/ driver | 0 0 0 1 0 0 0 0 _B |
| 00005D _H | LCRH | LCDC control register (upper) | R/W | | 0 0 0 0 0 0 0 0 _B |
| 00005E _H | LCRR | LCDC range register | R/W | | 0 0 0 0 0 0 0 0 _B |
| 00005F _H | Prohibited | | | | |
| 000060 _H | SMCS0 | Serial mode control status register | R, R/W | SIO (Extended Serial I/O) | 0 0 0 0 0 0 1 0 _B |
| 000061 _H | | | R/W | | -- -- 0 0 0 0 _B |
| 000062 _H | SDR0 | Serial Data Register | R/W | | XXXXXXXX _B |
| 000063 _H | SDCR0 | Communication prescaler control register | R/W | Communication prescaler (SIO) | 0 -- -- 0 0 0 0 _B |
| 000064 _H | SMCS1 | Serial mode control status register | R, R/W | SIO (Extended Serial I/O) | 0 0 0 0 0 0 1 0 _B |
| 000065 _H | | | R/W | | -- -- 0 0 0 0 _B |
| 000066 _H | SDR1 | Serial Data Register | R/W | | XXXXXXXX _B |
| 000067 _H | SDCR1 | Communication prescaler control register | R/W | Communication prescaler (SIO) | 0 -- -- 0 0 0 0 _B |
| 000068 _H | Prohibited | | | | |
| 000069 _H | Prohibited | | | | |
| 00006A _H | IBSR | I ² C status register | R | I ² C | 0 0 0 0 0 0 0 0 _B |
| 00006B _H | IBCR | I ² C control register | R/W | | 0 0 0 0 0 0 0 0 _B |
| 00006C _H | ICCR | I ² C clock control register | R/W | | XX0XXXXX _B |
| 00006D _H | IADR | I ² C address register | R/W | | XXXXXXXX _B |
| 00006E _H | IDAR | I ² C data register | R/W | | XXXXXXXX _B |
| 00006F _H | ROMM | ROM mirror function select register | R/W, W | | ROM mirror |

(Continued)

MB90800 Series

| Address | Register abbreviation | Register | Read/Write | Resource name | Initial Value |
|--|-----------------------|---|------------|---------------------------------------|------------------------------|
| 000070 _H | PDCRL0 | PDCRL0/PDCRH0 PPG down counter register | R | 16-bit PPG0 | 1 1 1 1 1 1 1 1 _B |
| 000071 _H | PDCRH0 | | | | 1 1 1 1 1 1 1 1 _B |
| 000072 _H | PCSRL0 | PCSRL0/PCSRH0 PPG cycle set register | W | | XXXXXXXX _B |
| 000073 _H | PCSRH0 | | | | XXXXXXXX _B |
| 000074 _H | PDUTL0 | PDUTL0/PDUTH0 PPG duty setting register | W | | XXXXXXXX _B |
| 000075 _H | PDUTH0 | | | | XXXXXXXX _B |
| 000076 _H | PCNTL0 | PCNTL0/PCNTH0 PPG control status register | R/W | | -- 0 0 0 0 0 _B |
| 000077 _H | PCNTH0 | | | 0 0 0 0 0 0 - _B | |
| 000078 _H | PDCRL1 | PDCRL1/PDCRH1 PPG down counter register | R | 16-bit PPG1 | 1 1 1 1 1 1 1 1 _B |
| 000079 _H | PDCRH1 | | | | 1 1 1 1 1 1 1 1 _B |
| 00007A _H | PCSRL1 | PCSRL1/PCSRH1 PPG cycle set register | W | | XXXXXXXX _B |
| 00007B _H | PCSRH1 | | | | XXXXXXXX _B |
| 00007C _H | PDUTL1 | PDUTL1/PDUTH1 PPG duty setting register | W | | XXXXXXXX _B |
| 00007D _H | PDUTH1 | | | | XXXXXXXX _B |
| 00007E _H | PCNTL1 | PCNTL1/PCNTH1 PPG control status register | R/W | | -- 0 0 0 0 0 _B |
| 00007F _H | PCNTH1 | | | 0 0 0 0 0 0 - _B | |
| 000080 _H to 000095 _H | (Reserved) | | | | |
| 000096 _H | Prohibited | | | | |
| 000097 _H | (Reserved) | | | | |
| 000098 _H to 00009D _H | Prohibited | | | | |
| 00009E _H | PACSR | ROM correction control register | R/W | ROM Correction | 0 0 0 0 0 0 0 _B |
| 00009F _H | DIRR | Delayed interrupt source generated/release register | R/W | Delayed interrupt | - - - - - 0 _B |
| 0000A0 _H | LPMCR | Low power consumption mode control register | R/W, W | Low power consumption control circuit | 0 0 0 1 1 0 0 _B |
| 0000A1 _H | CKSCR | Clock selector register | R/W, R | | 1 1 1 1 1 1 0 _B |
| 0000A2 _H to 0000A7 _H | Prohibited | | | | |
| 0000A8 _H | WDTC | Watchdog timer control register | R, W | Watchdog timer | XXXXX 1 1 1 _B |
| 0000A9 _H | TBTC | Time-base timer control register | R/W, W | Time-base timer | 1 - - 0 0 1 0 0 _B |
| 0000AA _H | WTC | Watch timer control register | R/W, R | Watch timer (Sub clock) | 1 X0 1 1 0 0 0 _B |
| 0000AB _H to 0000AD _H | Prohibited | | | | |

(Continued)

(Continued)

| Address | Register abbreviation | Register | Read/Write | Resource name | Initial Value |
|--|-----------------------|--------------------------------------|------------|---------------------------------------|------------------------------|
| 0000AE _H | FMCS | Flash control register | R/W | Flash I/F | 0 0 0 X 0 0 0 0 _B |
| 0000AF _H | TMCS | Timer clock output control register | R/W | Timer clock divide | XXXXXX 0 0 0 _B |
| 0000B0 _H | ICR00 | Interrupt control register 00 | R/W, W, R | Interrupt controller | 0 0 0 0 0 1 1 1 _B |
| 0000B1 _H | ICR01 | Interrupt control register 01 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B2 _H | ICR02 | Interrupt control register 02 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B3 _H | ICR03 | Interrupt control register 03 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B4 _H | ICR04 | Interrupt control register 04 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B5 _H | ICR05 | Interrupt control register 05 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B6 _H | ICR06 | Interrupt control register 06 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B7 _H | ICR07 | Interrupt control register 07 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B8 _H | ICR08 | Interrupt control register 08 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000B9 _H | ICR09 | Interrupt control register 09 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000BA _H | ICR10 | Interrupt control register 10 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000BB _H | ICR11 | Interrupt control register 11 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000BC _H | ICR12 | Interrupt control register 12 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000BD _H | ICR13 | Interrupt control register 13 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000BE _H | ICR14 | Interrupt control register 14 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000BF _H | ICR15 | Interrupt control register 15 | R/W, W, R | | 0 0 0 0 0 1 1 1 _B |
| 0000CA _H | FWR0 | Flash Program Control Register 0 | R/W | Flash I/F (MB90F803/S only object) | 0 0 0 0 0 0 0 0 _B |
| 0000CB _H | FWR1 | Flash Program Control Register 1 | R/W | | 0 0 0 0 0 0 0 0 _B |
| 0000CC _H | SSR0 | Sector Conversion Setting Register | R/W | | 0 0 XXXXXX 0 _B |
| 001FF0 _H | PADR0 | Program address detection register 0 | R/W | Address matching detection function | XXXXXXXX _B |
| 001FF1 _H | | | | | XXXXXXXX _B |
| 001FF2 _H | | | | | XXXXXXXX _B |
| 001FF3 _H | PADR1 | Program address detection register 1 | R/W | | XXXXXXXX _B |
| 001FF4 _H | | | | | XXXXXXXX _B |
| 001FF5 _H | | | | | XXXXXXXX _B |
| 007900 _H to 007917 _H | VRAM | LCD display RAM | R/W | LCD controller/ driver | XXXXXXXX _B |

- Read/Write
R/W : Readable and Writable
R : Read only
W : Write only

- Initial values
0 : Initial Value is "0".
1 : Initial Value is "1".
X : Initial Value is Indeterminate.
- : Unused bit

■ PERIPHERAL RESOURCES

1. I/O port

The I/O ports function to output data from the CPU to I/O pins by setting their port data register (PDR) and send signals input to I/O pins to the CPU. In addition, the port can randomly set the direction of the input/output of the port in bit by the port direction register (DDR).

The MB90800 series has 68 (70 ports when the subclock is not used) input/output pins. Port0 to port8 (port0 to port9 when product without the subclock is used) are input/output port.

(1) Port data register

| PDR | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value | Access |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------------|--------|
| PDR0 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Indeterminate | R/W* |
| Address : 000000H | | P07 | P06 | P05 | P04 | P03 | P02 | P01 | P00 | | |
| PDR1 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Indeterminate | R/W* |
| Address : 000001H | | P17 | P16 | P15 | P14 | P13 | P12 | P11 | P10 | | |
| PDR2 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Indeterminate | R/W* |
| Address : 000002H | | P27 | P26 | P25 | P24 | P23 | P22 | P21 | P20 | | |
| PDR3 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Indeterminate | R/W* |
| Address : 000003H | | P37 | P36 | P35 | P34 | P33 | P32 | P31 | P30 | | |
| PDR4 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Indeterminate | R/W* |
| Address : 000004H | | P47 | P46 | P45 | P44 | P43 | P42 | P41 | P40 | | |
| PDR5 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Indeterminate | R/W* |
| Address : 000005H | | P57 | P56 | P55 | P54 | P53 | P52 | P51 | P50 | | |
| PDR6 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Indeterminate | R/W* |
| Address : 000006H | | P67 | P66 | P65 | P64 | P63 | P62 | P61 | P60 | | |
| PDR7 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Indeterminate | R/W* |
| Address : 000007H | | — | P76 | P75 | P74 | P73 | P72 | P71 | P70 | | |
| PDR8 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Indeterminate | R/W* |
| Address : 000008H | | — | — | — | P84 | P83 | P82 | P81 | P80 | | |
| PDR9 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Indeterminate | R/W* |
| Address : 000009H | | — | — | — | — | — | — | P91 | P90 | | |

- : Unused

* : R/W access to I/O ports is a bit different in behavior from R/W access to memory as follows

- Input mode
 - When reading : Read the corresponding pin level.
 - When writing : Write into the latch for the output.
- Output mode
 - When reading : Read the value of the data register latch.
 - When writing : Write into the corresponding pin.

MB90800 Series

(2) Port direction register

| Register | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value | Access |
|----------|-------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|---------------------------|--------|
| DDR0 | Address : 000010 _H | D07 | D06 | D05 | D04 | D03 | D02 | D01 | D00 | 00000000 _B | R/W |
| DDR1 | Address : 000011 _H | D17 | D16 | D15 | D14 | D13 | D12 | D11 | D10 | 00000000 _B | R/W |
| DDR2 | Address : 000012 _H | D27 | D26 | D25 | D24 | D23 | D22 | D21 | D20 | 00000000 _B | R/W |
| DDR3 | Address : 000013 _H | D37 | D36 | D35 | D34 | D33 | D32 | D31 | D30 | 00000000 _B | R/W |
| DDR4 | Address : 000014 _H | D47 | D46 | D45 | D44 | D43 | D42 | D41 | D40 | 00000000 _B | R/W |
| DDR5 | Address : 000015 _H | D57 | D56 | D55 | D54 | D53 | D52 | D51 | D50 | 00000000 _B | R/W |
| DDR6 | Address : 000016 _H | D67 | D66 | D65 | D64 | D63 | D62 | D61 | D60 | 00000000 _B | R/W |
| DDR7 | Address : 000017 _H | — | D76 | D75 | D74 | D73 | D72 | D71 | D70 | - 0000000 _B | R/W |
| DDR8 | Address : 000018 _H | — | — | — | D84 | D83 | D82 | D81 | D80 | - - - 00000 _B | R/W |
| DDR9 | Address : 000019 _H | — | — | — | — | — | — | D91 | D90 | - - - - - 00 _B | R/W |

- : Unused

When each terminal functions as a port, each correspondent pin are controlled by the port direction register to following;

0 : Input mode

1 : Output mode This bit becomes "0" after a reset.

Note : When accessing this register by using the instruction of the read modify write system (instructions such as bit set) is mode, the bit targeted by an instruction becomes the defined value. However, the content of the output register set to input with the other changes to input value of the pin at that time. Therefore, be sure to write an expected value into PDR firstly, and then set DDR and finally change to the output when changing the input pin to the output pin is made.

(3) Analog Input Enable register

| ADER0 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value | Access |
|-------------------|-----|------|------|------|------|-------|-------|------|------|-----------------------|--------|
| Address : 00001EH | | ADE7 | ADE6 | ADE5 | ADE4 | ADE3 | ADE2 | ADE1 | ADE0 | 11111111 _B | R/W |
| ADER1 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | ----1111 _B | R/W |
| Address : 00001FH | | — | — | — | — | ADE11 | ADE10 | ADE9 | ADE8 | | |
| - : Unused | | | | | | | | | | | |

Each pin of port 6 is controlled by the analog input enable register as follow.

0 : Port input/output mode.

1 : Analog input mode. This bit becomes "1" after a reset.

2. UART

UART is a serial I/O port for asynchronous (start-stop synchronization) communication or CLK synchronous communications.


- With full-duplex double buffer
- Clock asynchronous (start-stop synchronization) , CLK synchronous communications (no start-bit/stop-bit) can be used.
- Supports multi-processor mode
- Built-in dedicated baud rate generator

Asynchronous : 120192/60096/30048/15024/781.25 K/390.625 kbps

CLK synchronous : 25 M/12.5 M/6.25 M/3.125 M/1.5627 M/781.25 kbps

- Variable baud rate can be set by an external clock.
- 7 bits data length (only asynchronous normal mode) /8 bits length
- Master/slave type communication function (at multiprocessor mode) : The communication between one (master) to n (slave) can be operating.
- Error detection functions (parity, framing, overrun)
- Transmission signal format is NRZ

(1) Register list

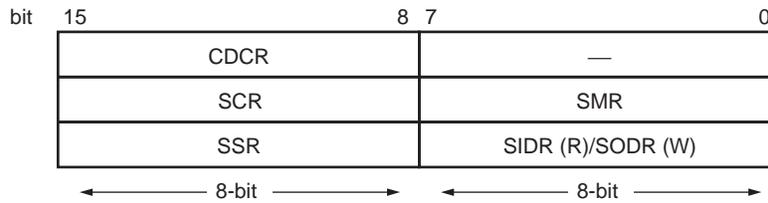

Serial mode register (SMR0, SMR1)

| | | | | | | | | | | |
|-----------|---------|-----|-----|-----|-----|-----|---|------|---------------|-------------|
| | bit 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value | |
| Address : | 000020H | MD1 | MD0 | CS2 | CS1 | CS0 | — | SCKE | SOE | 00000 - 00B |
| | 000028H | | | | | | | | | |
| | | R/W | R/W | R/W | R/W | R/W | — | R/W | R/W | Read/Write |

Serial control register(SCR0, SCR1)

| | | | | | | | | | | |
|-----------|---------|-----|-----|-----|-----|-----|-----|-----|---------------|------------|
| | bit 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value | |
| Address : | 000021H | PEN | P | SBL | CL | A/D | REC | RXE | TXE | 00000100B |
| | 000029H | | | | | | | | | |
| | | R/W | R/W | R/W | R/W | R/W | W | R/W | R/W | Read/Write |

Serial input/output register (SIDR0, SIDR1/SODR0, SODR1)

| | | | | | | | | | | |
|-----------|---------|-----|-----|-----|-----|-----|-----|-----|---------------|------------|
| | bit 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value | |
| Address : | 000022H | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | XXXXXXXXB |
| | 00002AH | | | | | | | | | |
| | | R/W | Read/Write |

Serial Data Register (SSR0, SSR1)

| | | | | | | | | | | |
|-----------|---------|----|-----|-----|------|------|-----|-----|---------------|------------|
| | bit 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value | |
| Address : | 000023H | PE | ORE | FRE | RDRF | TDRE | BDS | RIE | TIE | 00001000B |
| | 00002BH | | | | | | | | | |
| | | R | R | R | R | R | R/W | R/W | R/W | Read/Write |


Communication prescaler control register (CDCR0, CDCR1)

| | | | | | | | | | | |
|-----------|---------|-----|------|----|----|----------|------|------|---------------|--------------|
| | bit 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value | |
| Address : | 000025H | MD | URST | — | — | Reserved | DIV2 | DIV1 | DIV0 | 00 - - 0000B |
| | 00002DH | | | | | | | | | |
| | | R/W | R/W | — | — | R/W | R/W | R/W | R/W | Read/Write |

- : Unused

MB90800 Series

(2) Block Diagram

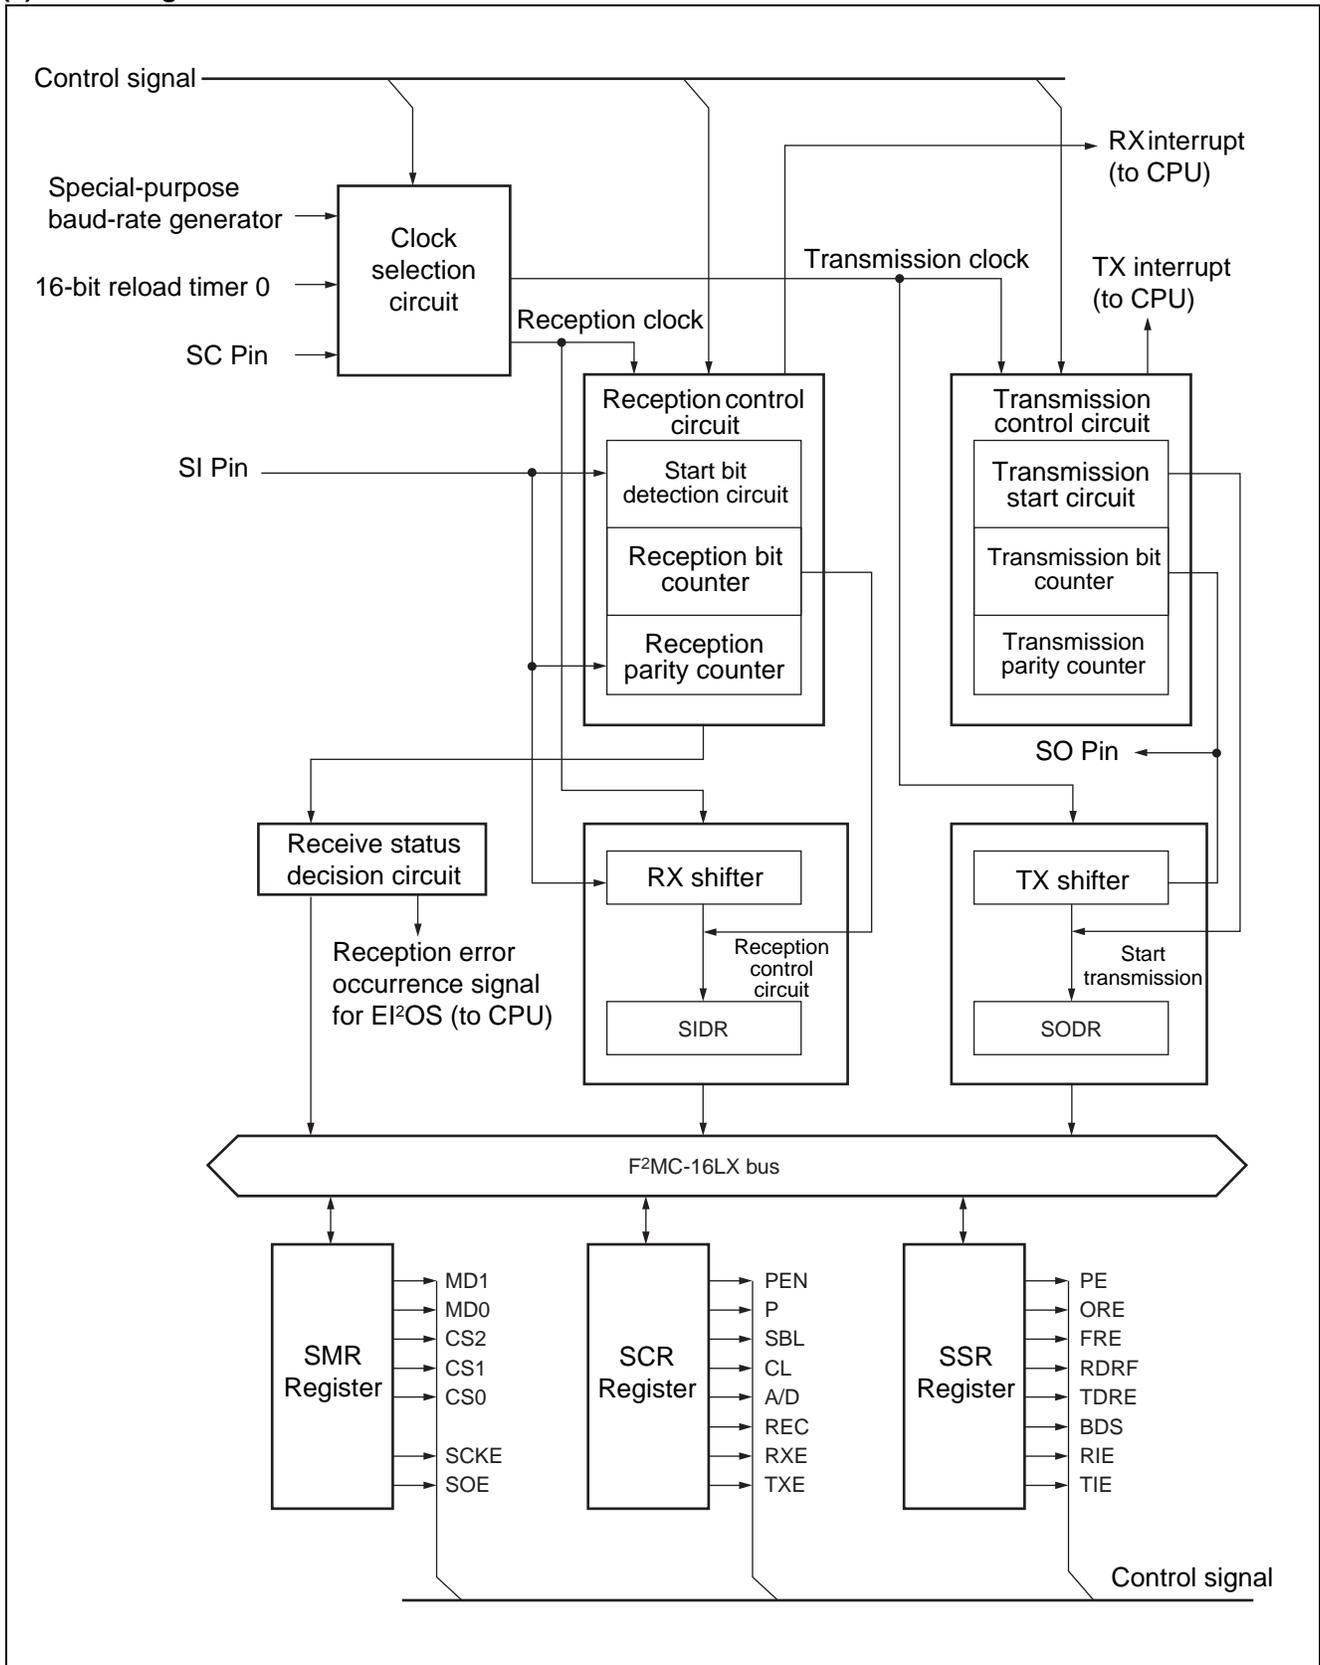

3. I²C Interface

I²C interface is the serial input/output port that support Inter IC BUS and functions as the master/slave device on the I²C bus. MB90800 series have 1 channel of the built-in I²C interface.


It has the features of I²C interface below.

- Master/slave sending and receiving
- Arbitration function
- Clock synchronization function
- Slave address and general call address detection function
- Detecting transmitting direction function
- Repeat generating and detecting function of the start conditions
- Bus error detection function
- The forwarding rate can be supported to 100 kbps.

(1) Register list

| | | | | | | | | | |
|--|----------|------|-----|-----|-----|------|------|-----|-----------------------|
| I ² C status register (IBSR) | | | | | | | | | Initial Value |
| Address :00006A _H | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 0000000 _B |
| | BB | RSC | AL | LRB | TRX | AAS | GCA | FBT | |
| | R | R | R | R | R | R | R | R | Read/Write |
| I ² C control register (IBCR) | | | | | | | | | Initial Value |
| Address :00006B _H | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 0000000 _B |
| | BER | BEIE | SCC | MSS | ACK | GCAA | INTE | INT | |
| | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| I ² C clock control register (ICCR) | | | | | | | | | Initial Value |
| Address :00006C _H | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | XX0XXXX _B |
| | — | — | EN | CS4 | CS3 | CS2 | CS1 | CS0 | |
| | — | — | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| I ² C data register (IDAR) | | | | | | | | | Initial Value |
| Address :00006E _H | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | XXXXXXXX _B |
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| I ² C address register (IADR) | | | | | | | | | Initial Value |
| Address :00006D _H | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | XXXXXXXX _B |
| | — | A6 | A5 | A4 | A3 | A2 | A1 | A0 | |
| | — | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| - | : Unused | | | | | | | | |

(2) Block Diagram

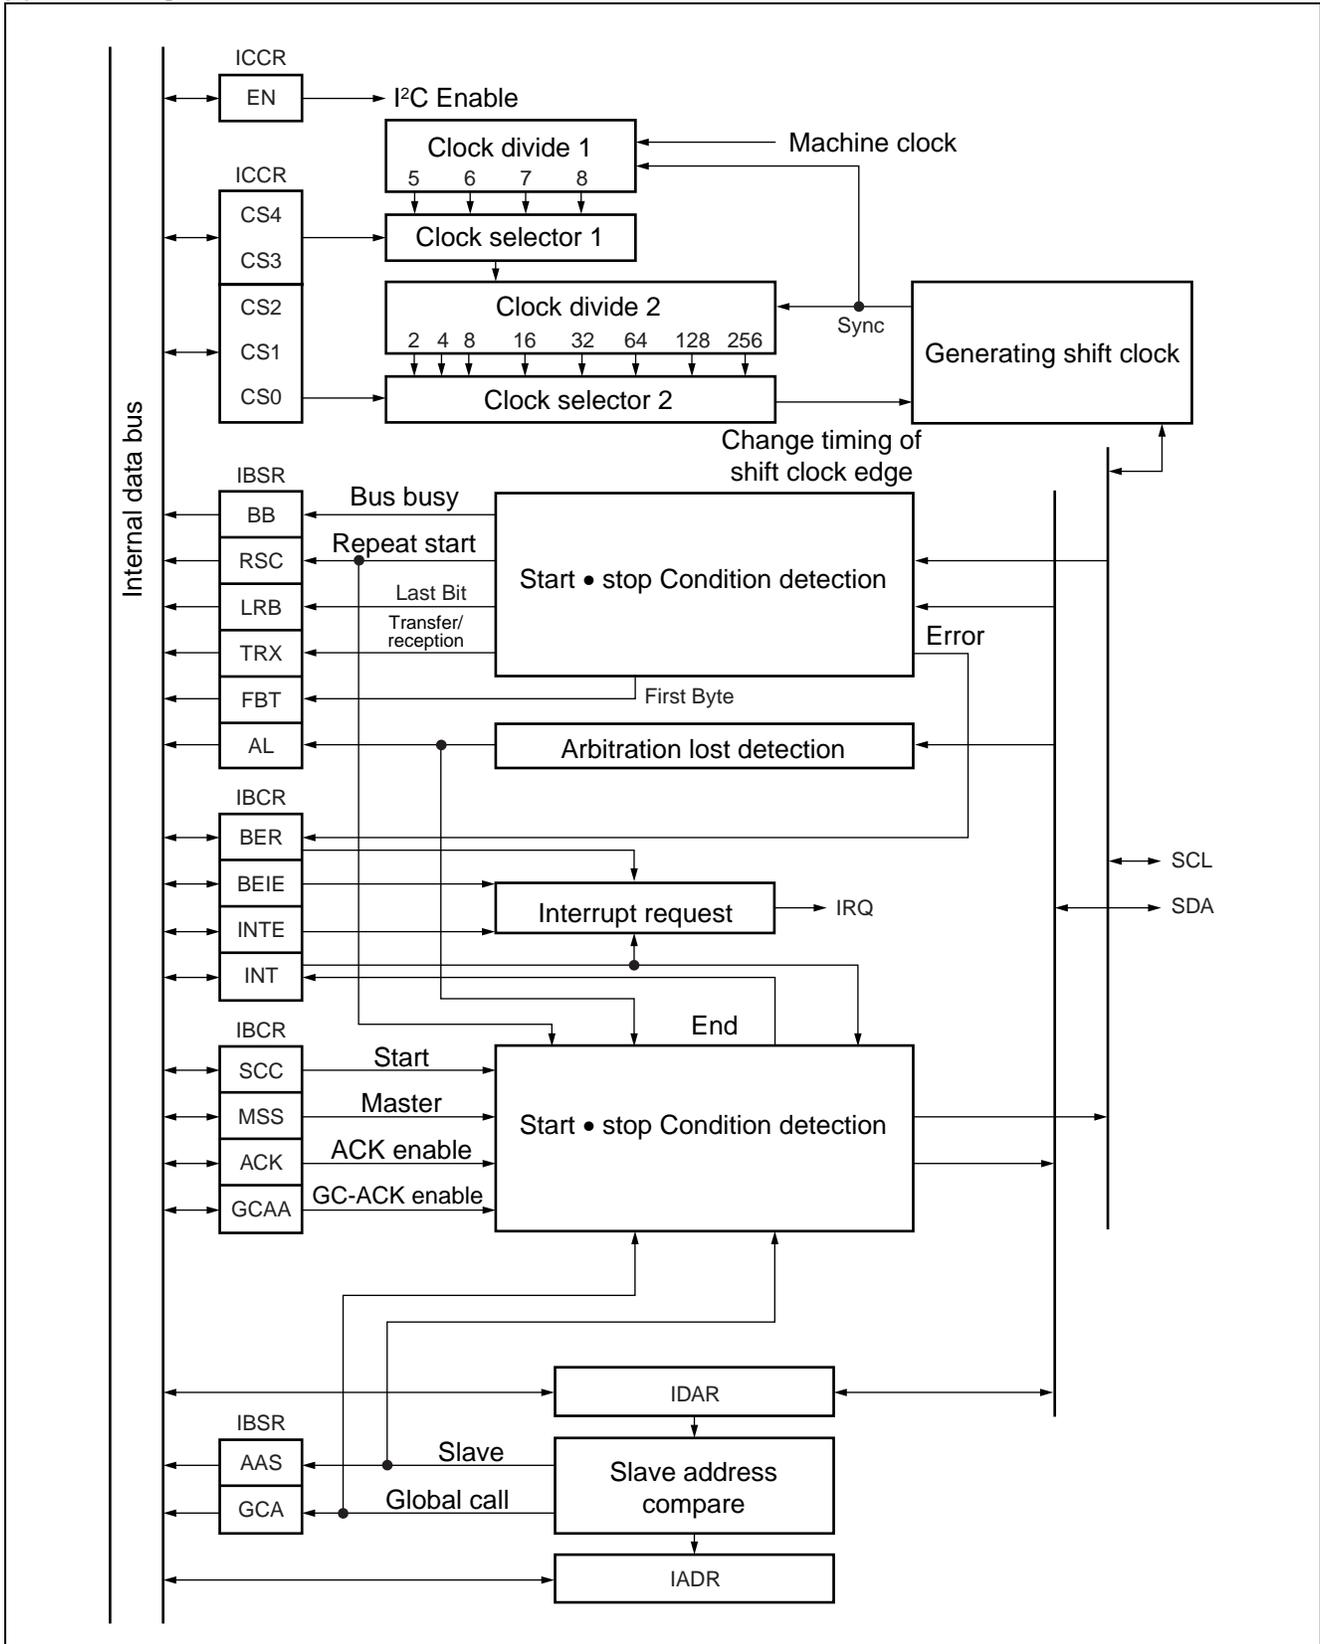

4. Extended I/O serial interface

The extended I/O serial interface is a serial I/O interface that can transfer data through the adoption of 8-bit × 2 channels configured clock synchronization scheme. The extended I/O serial interface also has two alternatives in data transfer called LSB first and MSB first.

The serial I/O interface operates in two modes:


- Internal shift clock mode : Transfer data in sync with the internal clock.
- External shift clock mode : Transfers data in sync with the clock input through an external pin (SC) . In this mode, transfer operation performed by the CPU instruction is also available by operating the general-use port sharing an external pin (SC) .

(1) Register list

| | | | | | | | | | | |
|---|-----|------|------|------|-----|----------|------|------|------|-----------------------|
| Serial mode control status register (SMCS0, SMCS1) | | | | | | | | | | |
| Address : | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| : 000060H | | SMD2 | SMD1 | SMD0 | SIE | SIR | BUSY | STOP | STRT | 00000010 _B |
| : 000064H | | R/W | R/W | R/W | R/W | R/W | R | R/W | R/W | Read/Write |
| Address : | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| : 000061H | | — | — | — | — | MODE | BDS | SOE | SCOE | ----0000 _B |
| : 000065H | | — | — | — | — | R/W | R/W | R/W | R/W | Read/Write |
| Serial Data Register (SDR0, SDR1) | | | | | | | | | | |
| Address : | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| : 000062H | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | XXXXXXXX _B |
| : 000066H | | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| Communication Prescaler control register (SDCR0, SDCR1) | | | | | | | | | | |
| Address : | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| : 000063H | | MD | — | — | — | Reserved | DIV2 | DIV1 | DIV0 | 0---0000 _B |
| : 000067H | | R/W | — | — | — | R/W | R/W | R/W | R/W | Read/Write |
| - : Unused | | | | | | | | | | |

MB90800 Series

(2) Block Diagram

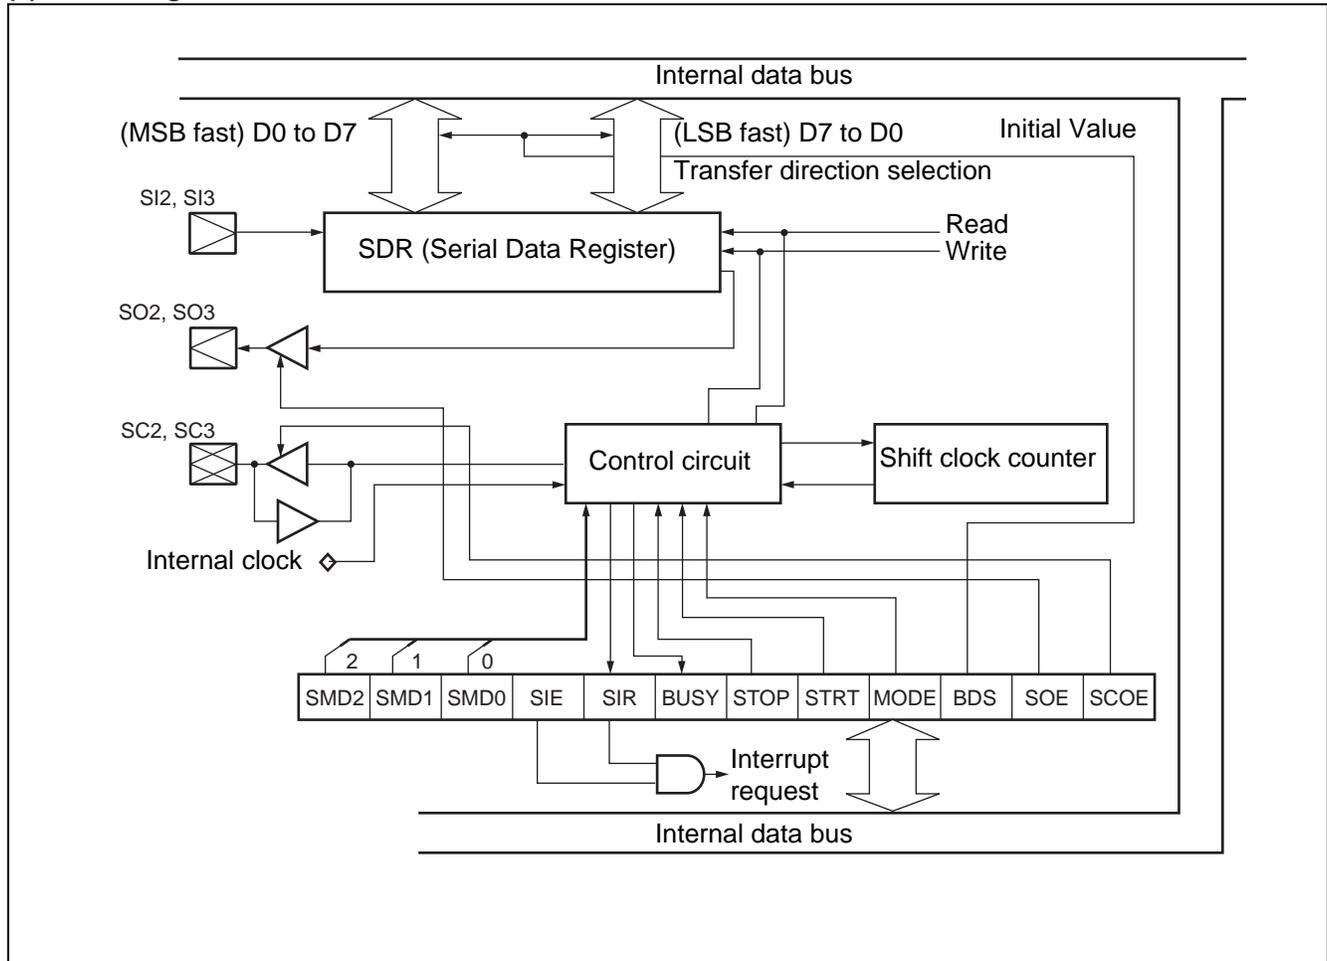

5. 8/10-bit A/D converter

The feature of 8/10-bit A/D converter is shown as follows.

- conversion time : 3.1 μ s minimum per 1 channel

(78 machine cycle/at machine clock 25 MHz/including the sampling time)

- Sampling time : 2.0 μ s minimum per 1channel

(50 machine cycle/at machine clock 25 MHz)

- Uses RC-type successive approximation conversion method with a sample & hold circuit
- 8-bit resolution or 10-bit resolution can be select.
- 12 channel program-selectable analog inputs.

Single conversion mode : Convert specified 1 channel

Scan conversion mode : Continuous plural channels (maximum 12 channels can be programmed) are converted.

Continuous conversion mode : Selected channel converted continuously.


Stop conversion time : Perform conversion for one channel, then pause it to wait for the next activation trigger (synchronizes the conversion start timing)

- EI²OS can be activated by outputting the interrupt request when the A/D conversion completes.
- If the A/D conversion is performed under the condition of the interrupt enable, the converting data will be protected.
- Selectable conversion activation trigger : Software, or reload timer (rising edge)

(1) Register list

| | | | | | | | | | | |
|--|-----|------|-----|------|------|------|------|------|----------|-------------------------|
| ADCS1, ADCS0 (Control status register) | | | | | | | | | | |
| ADCS0 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| Address : 000034 _H | | MD1 | MD0 | — | — | — | — | — | — | 00 - - - - - B |
| | | R/W | R/W | — | — | — | — | — | — | Read/Write |
| | | | | | | | | | | |
| ADCS1 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| Address : 000035 _H | | BUSY | INT | INTE | PAUS | STS1 | STS0 | STRT | Reserved | 00000000 _B |
| | | R/W | R/W | R/W | R/W | R/W | R/W | W | R/W | Read/Write |
| | | | | | | | | | | |
| ADCR1, ADCR0 (Data register) | | | | | | | | | | |
| ADCR0 | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| Address : 000036 _H | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | XXXXXXXX _B |
| | | R | R | R | R | R | R | R | R | Read/Write |
| | | | | | | | | | | |
| ADCR1 | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| Address : 000037 _H | | S10 | ST1 | ST0 | CT1 | CT0 | — | D9 | D8 | 00101 - XX _B |
| | | W | W | W | W | W | — | R | R | Read/Write |
| - : Unused | | | | | | | | | | |

(2) Block Diagram

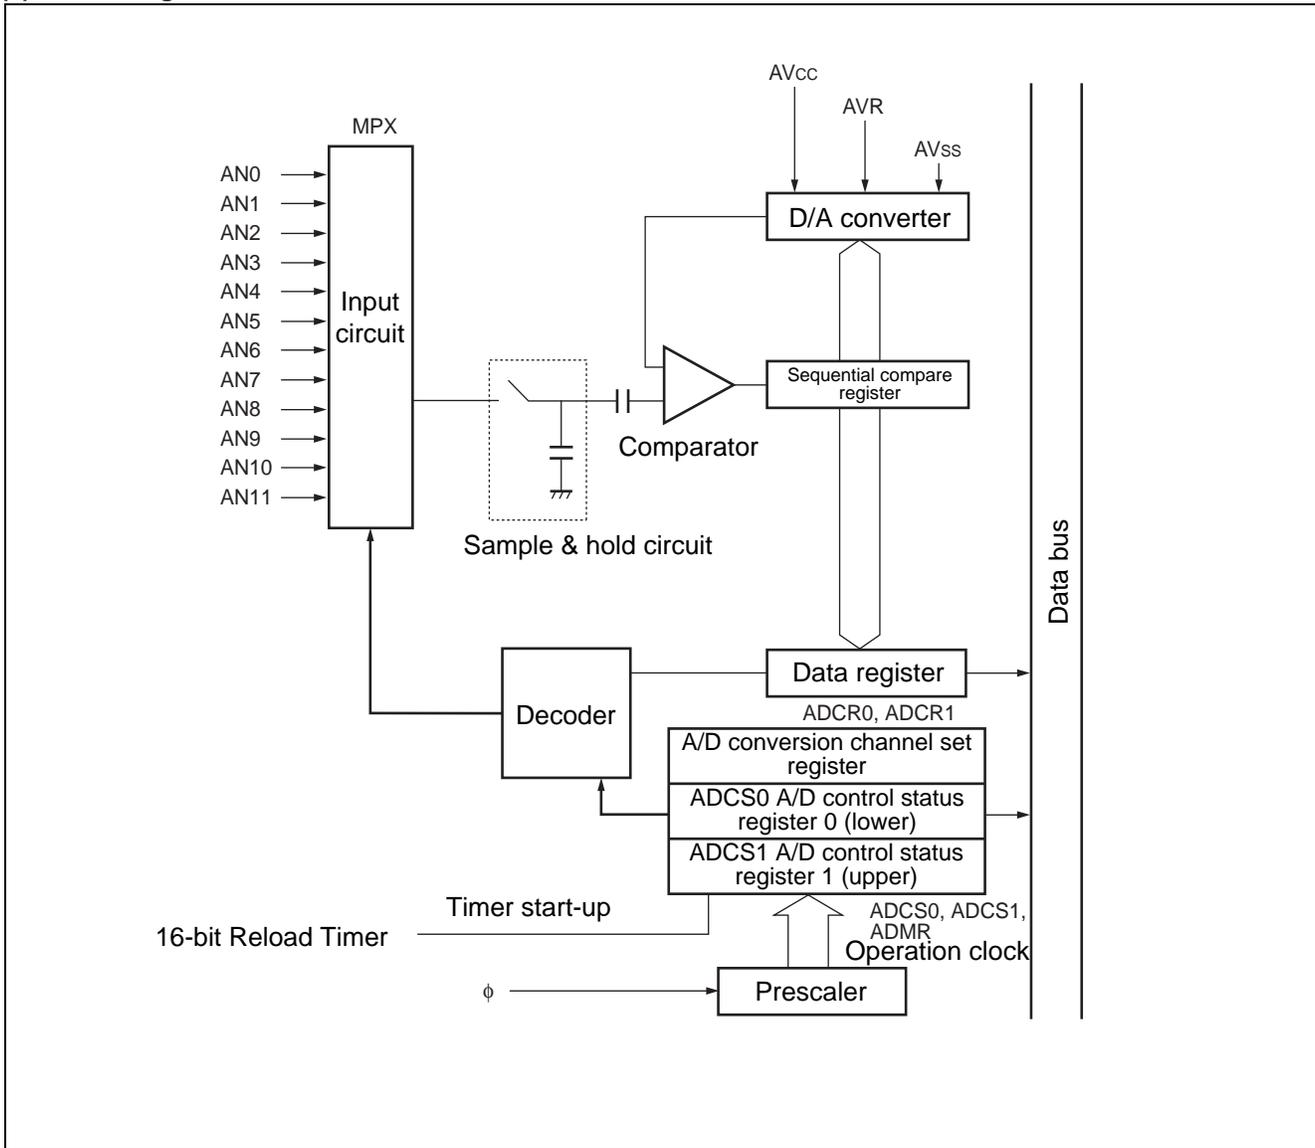

6. 16 bits PPG

The PPG timer consists of the following:

- Prescaler
- 16-bit down-counter: 1
- 16-bit data register with a cycle setting buffer
- 16-bit compare register with a duty setting buffer
- Pin control unit

The PPG timer can output pulses synchronized to the software trigger.

The output pulse can be changed to any cycle and duty freely by updating the PCSRL, PCSRH/PDUTL, PDUTH registers.

- PWM function

The PPG timer can output pulses programmably by updating the PCSR and PDUT registers described above in synchronization to the trigger.

Can also be used as a D/A converter by an external circuit.

- Single shot function

By detecting an edge of the trigger input, a single pulse can be output.

- 16-bit down counter

The counter operation clock comes from eight kinds optional. There are eight kinds of internal clocks.

(ϕ , $\phi/2$, $\phi/4$, $\phi/8$, $\phi/16$, $\phi/32$, $\phi/64$, $\phi/128$) ϕ : machine clock

The counter can be initialized to "FFFF_H" at a reset or counter borrow.

- Interrupt request

The PPG timer generates an interrupt request when :

- Timer start-up
- Counter borrow occurrence (cycle match)
- Duty match occurrence

MB90800 Series

(1) Register list

PCNTH (PCNTH0/PCNTH1 PPG Control Status register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|----------------------|
| 000077 _H | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| 00007F _H | | CNTE | STGR | MDSE | RTRG | CKS2 | CKS1 | CKS0 | PGMS | 0000000 _B |
| | | R/W | Read/Write |

PCNTL (PCNTL0/PCNTL1 PPG Control Status register)

| | | | | | | | | | | |
|---------------------|-----|---|---|------|------|------|------|------|------|-------------------------|
| 000076 _H | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| 00007E _H | | — | — | IREN | IRQF | IRS1 | IRS0 | POEN | OSEL | - - 000000 _B |
| | | — | — | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |

PDCRH (PDCRH0/PDCRH1 PPG Down Counter Register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|-----------------------|
| 000071 _H | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| 000079 _H | | DC15 | DC14 | DC13 | DC12 | DC11 | DC10 | DC09 | DC08 | 11111111 _B |
| | | R | R | R | R | R | R | R | R | Read/Write |

PDCRL (PDCRL0/PDCRL1 PPG Down Counter Register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|-----------------------|
| 000070 _H | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| 000078 _H | | DC07 | DC06 | DC05 | DC04 | DC03 | DC02 | DC01 | DC00 | 11111111 _B |
| | | R | R | R | R | R | R | R | R | Read/Write |

PCSRH (PCSRH0/PCSRH1 PPG cycle set register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|-----------------------|
| 000073 _H | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| 00007B _H | | CS15 | CS14 | CS13 | CS12 | CS11 | CS10 | CS09 | CS08 | XXXXXXXX _B |
| | | W | W | W | W | W | W | W | W | Read/Write |

PC SRL (PC SRL0/PC SRL1 PPG cycle set register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|-----------------------|
| 000072 _H | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| 00007A _H | | CS07 | CS06 | CS05 | CS04 | CS03 | CS02 | CS01 | CS00 | XXXXXXXX _B |
| | | W | W | W | W | W | W | W | W | Read/Write |

PDUTH (PDUTH0/PDUTH1 PPG duty set register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|-----------------------|
| 000075 _H | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| 00007D _H | | DU15 | DU14 | DU13 | DU12 | DU11 | DU10 | DU09 | DU08 | XXXXXXXX _B |
| | | W | W | W | W | W | W | W | W | Read/Write |


PDUTL (PDUTL0/PDUTL1 PPG duty set register)

| | | | | | | | | | | |
|---------------------|-----|------|------|------|------|------|------|------|------|-----------------------|
| 000074 _H | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| 00007C _H | | DU07 | DU06 | DU05 | DU04 | DU03 | DU02 | DU01 | DU00 | XXXXXXXX _B |
| | | W | W | W | W | W | W | W | W | Read/Write |

- : Unused

(2) Block Diagram

- 16-bit PPG ch.0/ch.1 block diagram

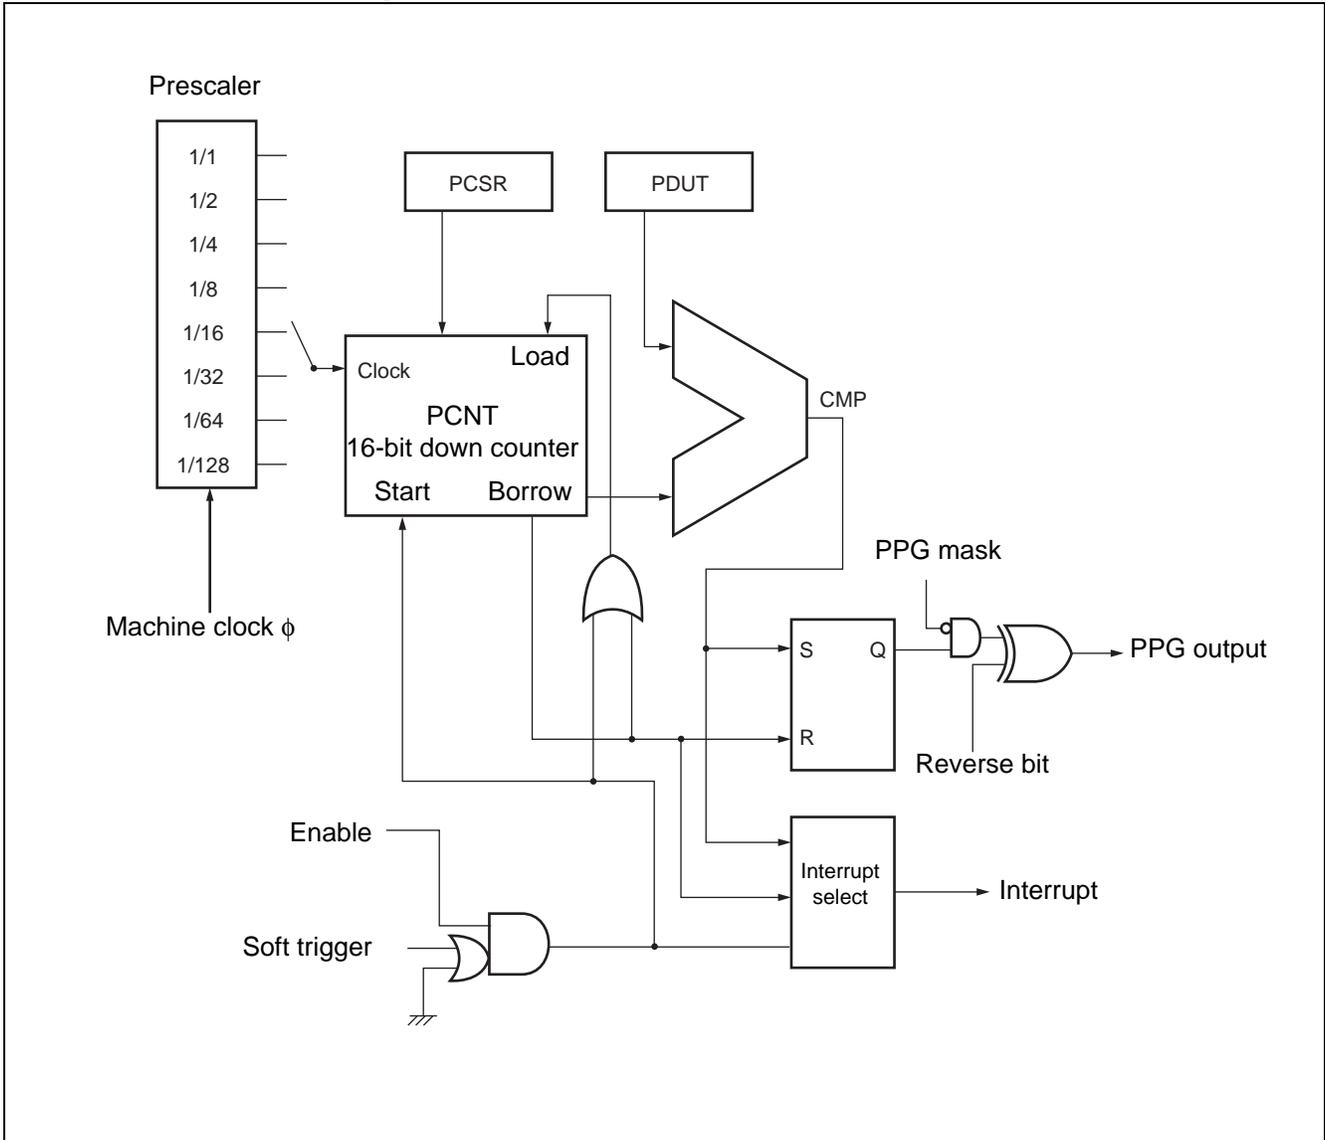

7. Delay interrupt generator module


The delayed interrupt generation module outputs an interrupt request for task switching. The hardware interrupt request can be generated by software.

(1) Register list

| Delayed Interrupt/release register(DIRR) | | | | | | | | | Initial Value | |
|--|-----|----|----|----|----|----|----|---|---------------|----------------------|
| DIRR | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | |
| Address : 00009FH | | — | — | — | — | — | — | — | R0 | ----- 0 _B |
| | | — | — | — | — | — | — | — | R/W | Read/Write |

- : Unused

(2) Block diagram

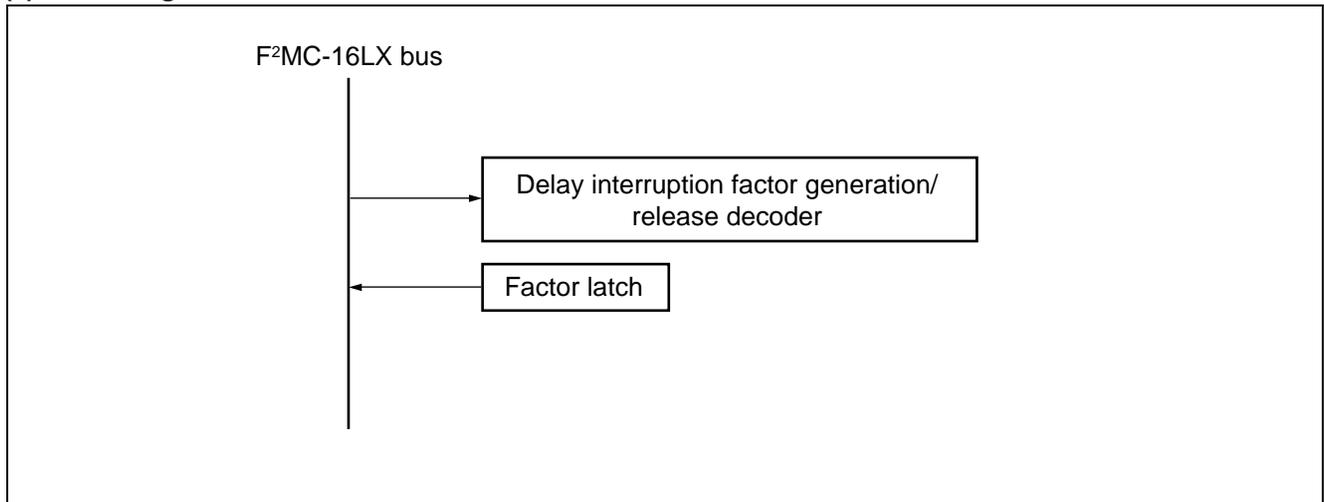


8. DTP/External interrupt

DTP (Data Transfer Peripheral)/External interrupt circuit detects the interrupt request input from the external interrupt input terminal, and outputs the interrupt request.

(1) Register list

| | | | | | | | | | | |
|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------------------|
| Interrupt/DTP enable register (ENIR) | | | | | | | | | | |
| ENIR | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| Address : 000030H | | — | — | — | — | EN3 | EN2 | EN1 | EN0 | ---- 0000 _B |
| | | — | — | — | — | R/W | R/W | R/W | R/W | Read/Write |
| Interrupt/DTP source register (EIRR) | | | | | | | | | | |
| EIRR | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| Address : 000031H | | — | — | — | — | ER3 | ER2 | ER1 | ER0 | ---- XXXX _B |
| | | — | — | — | — | R/W | R/W | R/W | R/W | Read/Write |
| Request level setting register (ELVR) | | | | | | | | | | |
| ELVR | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| Address : 000032H | | LB3 | LA3 | LB2 | LA2 | LB1 | LA1 | LB0 | LA0 | 00000000 _B |
| | | R/W | Read/Write |
| - : Unused | | | | | | | | | | |


(2) Block diagram

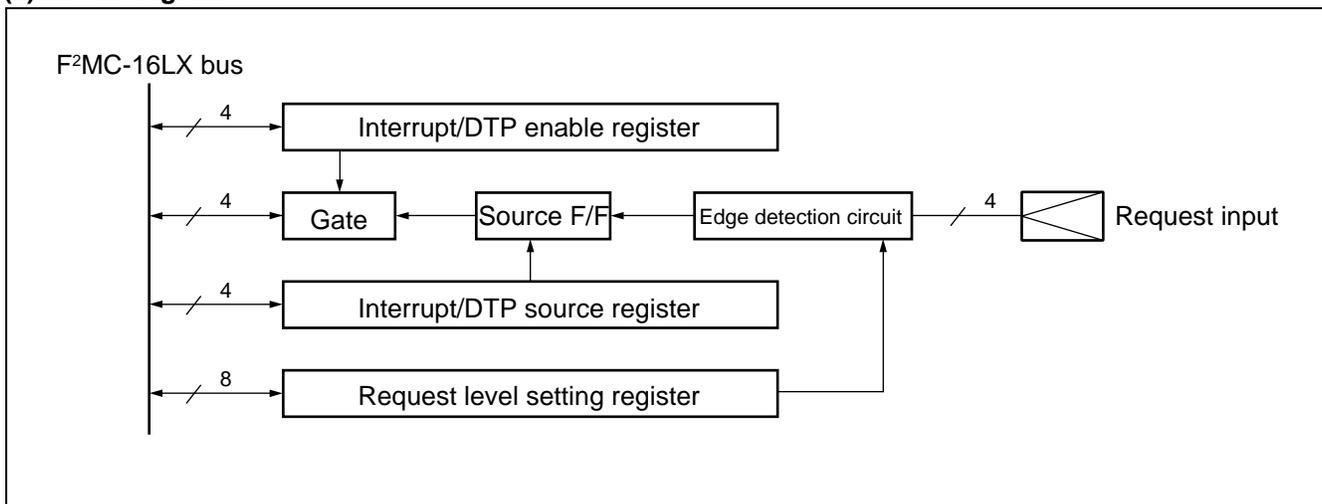


9. 16-bit input/output timer

The 16-bit I/O timer consists of one 16-bit free-run timer, two output compare and two input capture. This function enables six independent waveforms to be output based on the 16-bit free-run timer, and input pulse widths and external clock frequencies to be measured.

• Register list

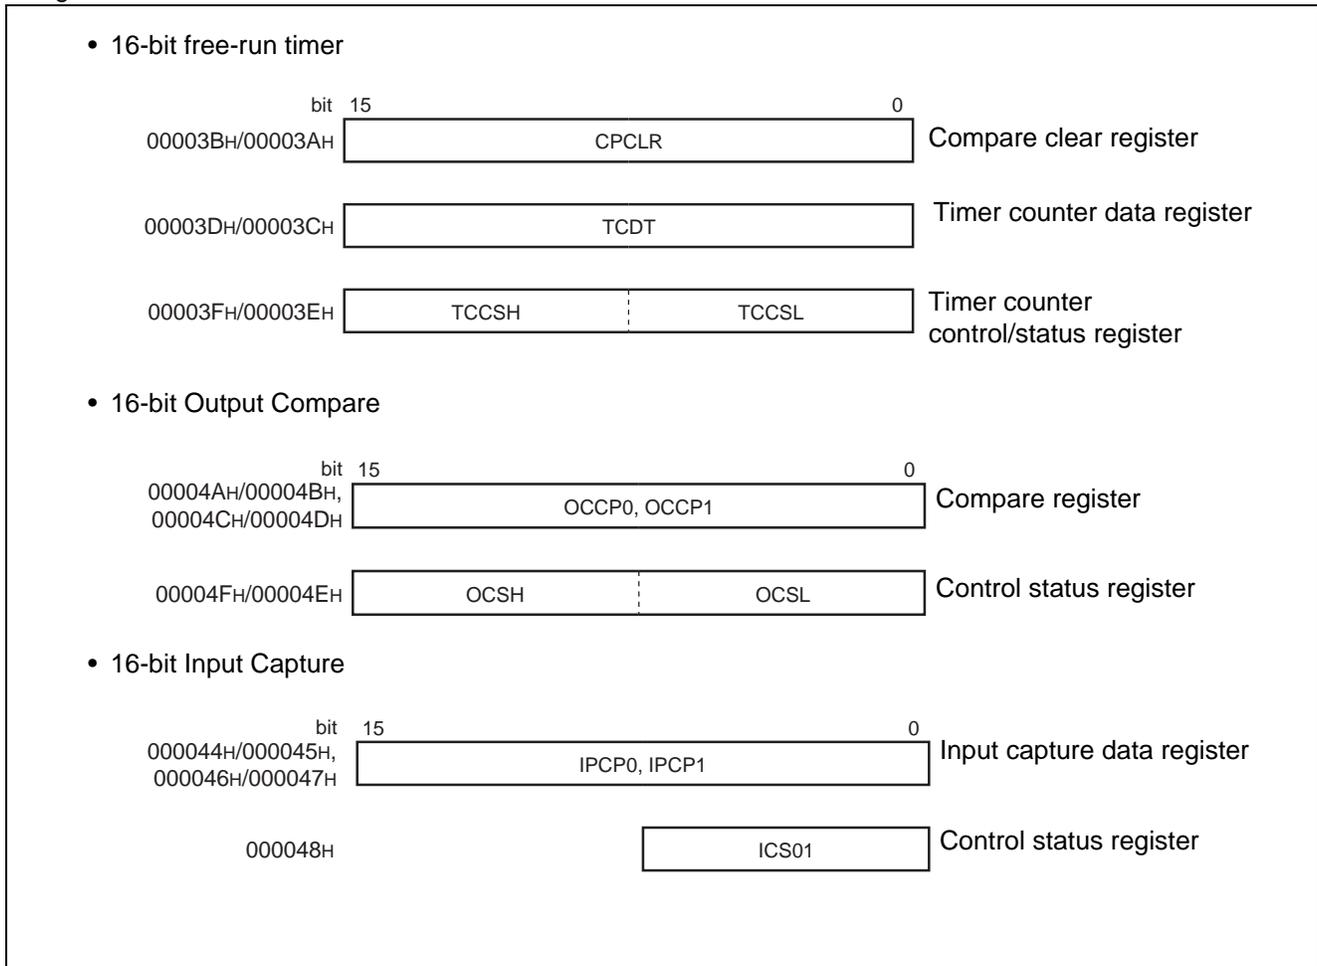

• Block diagram

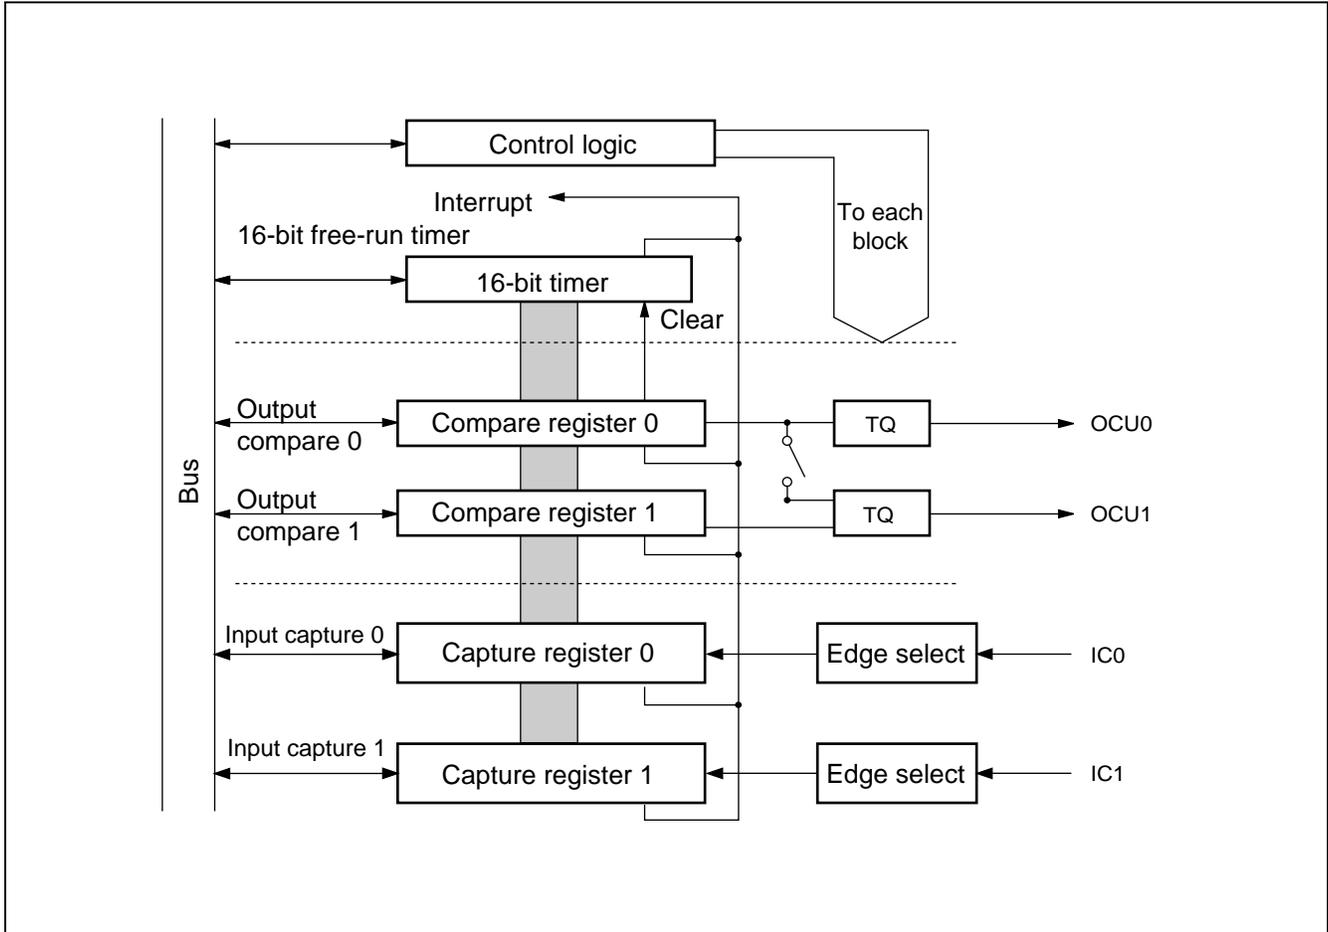

(1) 16-bit free-run timer

The 16-bit free-run timer consists of a 16-bit up-down counter and control status register.


Counter value of 16-bit free-run timer is available as base timer for input capture and output compare.

- Clock for the counter operation can be selected from eight types.
- The counter overflow interruption can be generated.
- Setting the mode enables initialization of the counter through compare-match operation with the value of the compare clear register in the output compare and that of the free-run timer counter.

• Register list

| | | | | | | | | | |
|--|------|------|------|------|------|------|------|---------------|-----------------------|
| Compare clear register (CPCLR) | | | | | | | | Initial Value | |
| 00003B _H | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | XXXXXXXX _B |
| | CL15 | CL14 | CL13 | CL12 | CL11 | CL10 | CL09 | CL08 | Read/Write |
| | R/W | |
| Compare clear register (CPCLR) | | | | | | | | Initial Value | |
| 00003A _H | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | XXXXXXXX _B |
| | CL07 | CL06 | CL05 | CL04 | CL03 | CL02 | CL01 | CL00 | Read/Write |
| | R/W | |
| Timer counter data register (TCDT) | | | | | | | | Initial Value | |
| 00003D _H | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 00000000 _B |
| | T15 | T14 | T13 | T12 | T11 | T10 | T09 | T08 | Read/Write |
| | R/W | |
| Timer counter data register (TCDT) | | | | | | | | Initial Value | |
| 00003C _H | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 00000000 _B |
| | T07 | T06 | T05 | T04 | T03 | T02 | T01 | T00 | Read/Write |
| | R/W | |
| Timer counter control/status register (TCCS) | | | | | | | | Initial Value | |
| 00003F _H | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 0--00000 _B |
| | ECKE | — | — | MSI2 | MSI1 | MSI0 | ICLR | ICRE | Read/Write |
| | R/W | — | — | R/W | R/W | R/W | R/W | R/W | |
| Timer counter control/status register (TCCS) | | | | | | | | Initial Value | |
| 00003E _H | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 00000000 _B |
| | IVF | IVFE | STOP | MODE | SCLR | CLK2 | CLK1 | CLK0 | Read/Write |
| | R/W | |
| - : Unused | | | | | | | | | |

• Block diagram

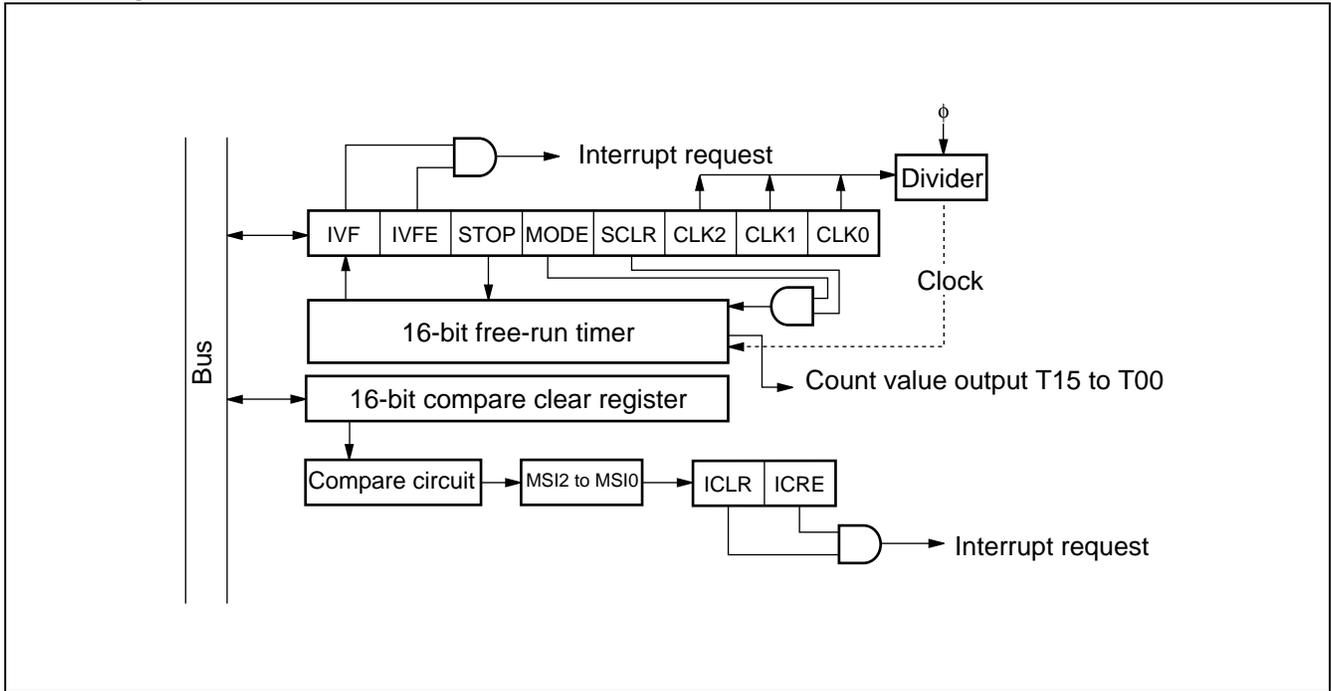

MB90800 Series

(2) Output compare


The output compare consists of 16-bit compare registers, compare output pin part and a control register. It can reverse the output level for the pin and at the same time, generate an interrupt when the 16-bit free-run timer value matches a value set in one of the 16-bit compare registers of this module.

- It has a total of six compare registers that can operate independently. In addition, the output can be set to be controlled by using two compare registers.
- An interrupt can be set by a comparing match.

• Register list

| | | | | | | | | | |
|---------------------------------|------|------|------|------|------|------|------|---------------|-----------------------|
| Compare register (OCCP0, OCCP1) | | | | | | | | Initial Value | |
| bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 00000000 _B |
| 00004B _H | OP15 | OP14 | OP13 | OP12 | OP11 | OP10 | OP09 | OP08 | Read/Write |
| 00004D _H | R/W | |
| Compare register (OCCP2, OCCP3) | | | | | | | | Initial Value | |
| bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 00000000 _B |
| 00004A _H | OP07 | OP06 | OP05 | OP04 | OP03 | OP02 | OP01 | C00 | Read/Write |
| 00004C _H | R/W | |
| Control register (OCSH) | | | | | | | | Initial Value | |
| bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | ---0000 _B |
| 00004F _H | — | — | — | CMOD | OTE1 | OTE0 | OTD1 | OTD0 | Read/Write |
| | — | — | — | R/W | R/W | R/W | R/W | R/W | |
| Control register (OCSL) | | | | | | | | Initial Value | |
| bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 0000--00 _B |
| 00004E _H | IOP1 | IOP0 | IOE1 | IOE0 | — | — | CST1 | CST0 | Read/Write |
| | R/W | R/W | R/W | R/W | — | — | R/W | R/W | |
| - : Unused | | | | | | | | | |

• Block diagram

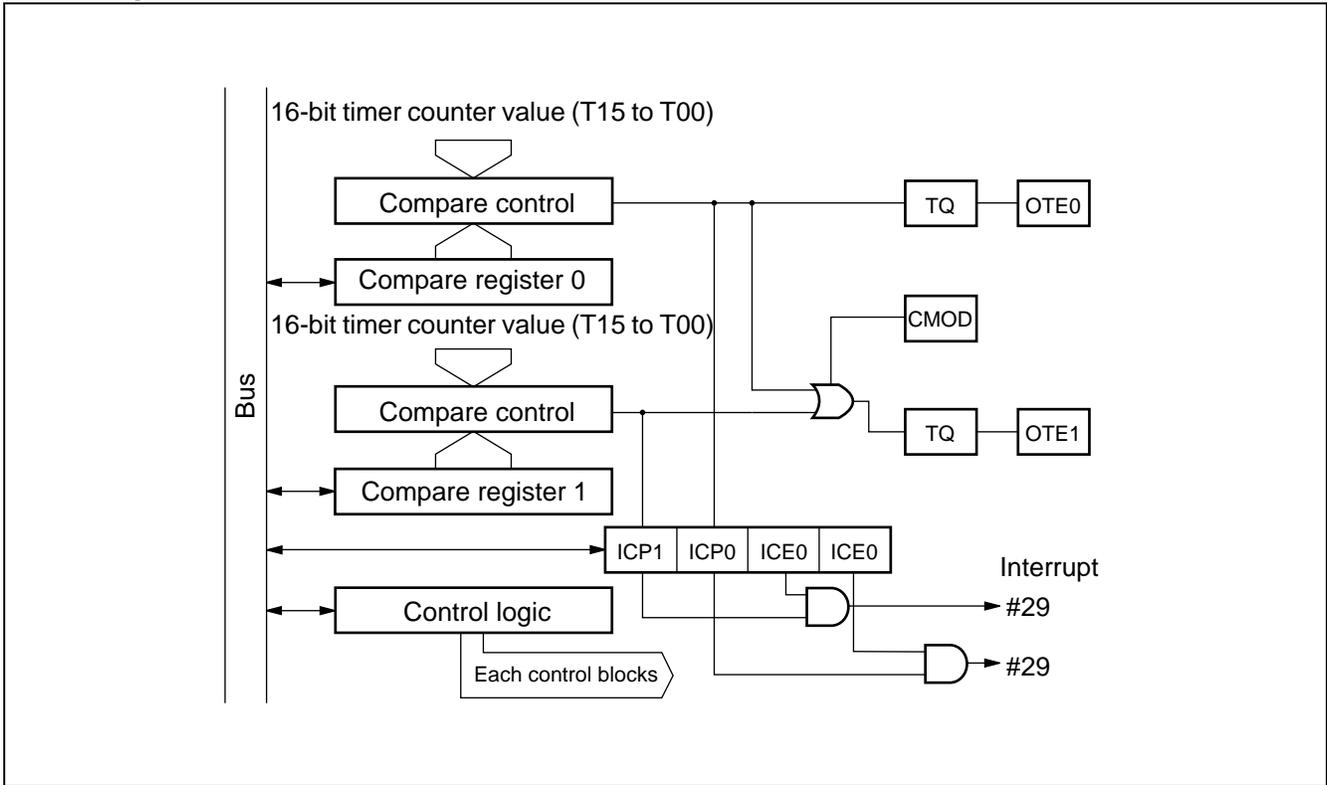

(3) Input capture

The input capture consists of input capture and control registers. Each input capture has its corresponding external input pin.


This module has a function that detects a rising edge, falling edge or both edges and holds a value of the 16-bit free-run timer in a register at the time of detection. It can also generate an interrupt when detecting an edge.

- The detection edge of an external input can be selected from among three types. Rising edge/falling edge/both edges.
- It can generate an interrupt when it detects the valid edge of the external input.

• Register list

| | | | | | | | | | |
|--|--------|------|------|------|------|------|------|---------------|-----------------------|
| Input capture data register (IPCP0, IPCP1) | | | | | | | | Initial Value | |
| 000045H | bit 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | XXXXXXXX _B |
| 000047H | CP15 | CP14 | CP13 | CP12 | CP11 | CP10 | CP09 | CP08 | Read/Write |
| | R | R | R | R | R | R | R | R | |
| | | | | | | | | Initial Value | |
| 000044H | bit 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | XXXXXXXX _B |
| 000046H | CP07 | CP06 | CP05 | CP04 | CP03 | CP02 | CP01 | CP00 | Read/Write |
| | R | R | R | R | R | R | R | R | |
| Control status register (ICS01) | | | | | | | | Initial Value | |
| 000048H | bit 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 00000000 _B |
| | ICP1 | ICP0 | ICE1 | ICE0 | EG11 | EG10 | EG01 | EG00 | Read/Write |
| | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | |

• Block diagram

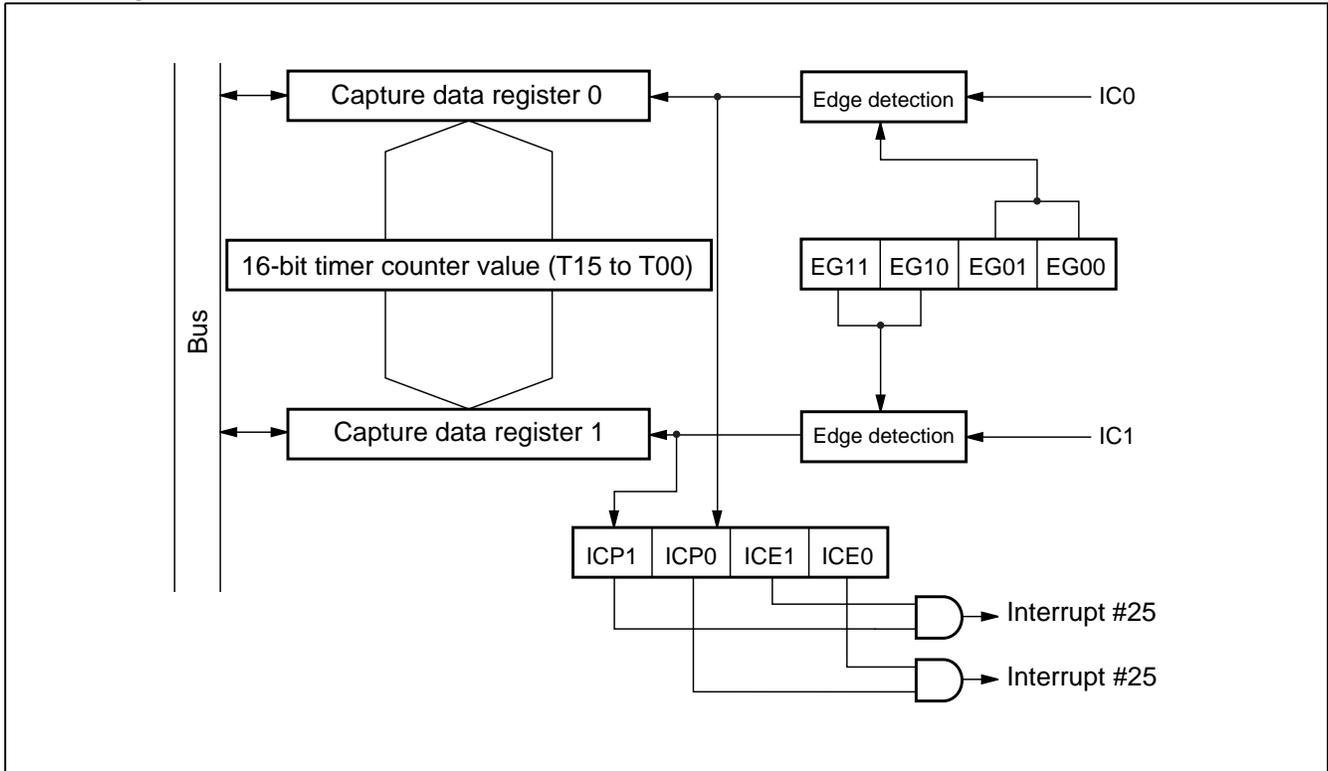

10. 16-bit reload timer

The 16-bit reload timer provides two functions either one which can be selected, the internal clock mode that performs the count down by synchronizing with 3-type internal clocks and the event count mode that performs the count down by detecting the arbitration. This timer defines an underflow as a transition of the count value from 0000H to FFFFH. Therefore, when the equation (counted value = reload register setting value+1) holds, an underflow occurs. Either mode can be selected for the count operation from the reload mode which repeats the count by reloading the count setting value at the underflow occurrence or the one-shot mode which stops the count at the underflow occurrence. The interrupt can be generated at the counter underflow occurrence so as to correspond to the DTC.

(1) Register list

- TMCSR Timer control status register

Timer control status register (upper) (TMCSR0H to TMCSR2H)

| | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
|---------|-----|----|----|----|----|------|------|------|------|------------------------|
| 000051H | | — | — | — | — | CSL1 | CSL0 | MOD2 | MOD1 | ---- 0000 _B |
| 000055H | | | | | | R/W | R/W | R/W | R/W | Read/Write |
| 000059H | | — | — | — | — | | | | | |

Timer control status register (lower) (TMCSR0L to TMCSR2L)

| | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
|---------|-----|------|------|------|------|------|-----|------|-----|-----------------------|
| 000050H | | MOD0 | OUTE | OUTL | RELD | INTE | UF | CNTE | TRG | 00000000 _B |
| 000054H | | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| 000058H | | | | | | | | | | |

- 16-bit timer register/16-bit reload register TMR0 to TMR2/TMRLR0 to TMRLR2 (upper)


| | bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------|
| 000053H | | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | XXXXXXXX _B |
| 000057H | | R/W | Read/Write |
| 00005BH | | | | | | | | | | |

TMR0 to TMR2/TMRLR0 to TMRLR2 (lower)

| | bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------|
| 000052H | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | XXXXXXXX _B |
| 000056H | | R/W | Read/Write |
| 00005AH | | | | | | | | | | |

- : Unused

(2) Block diagram

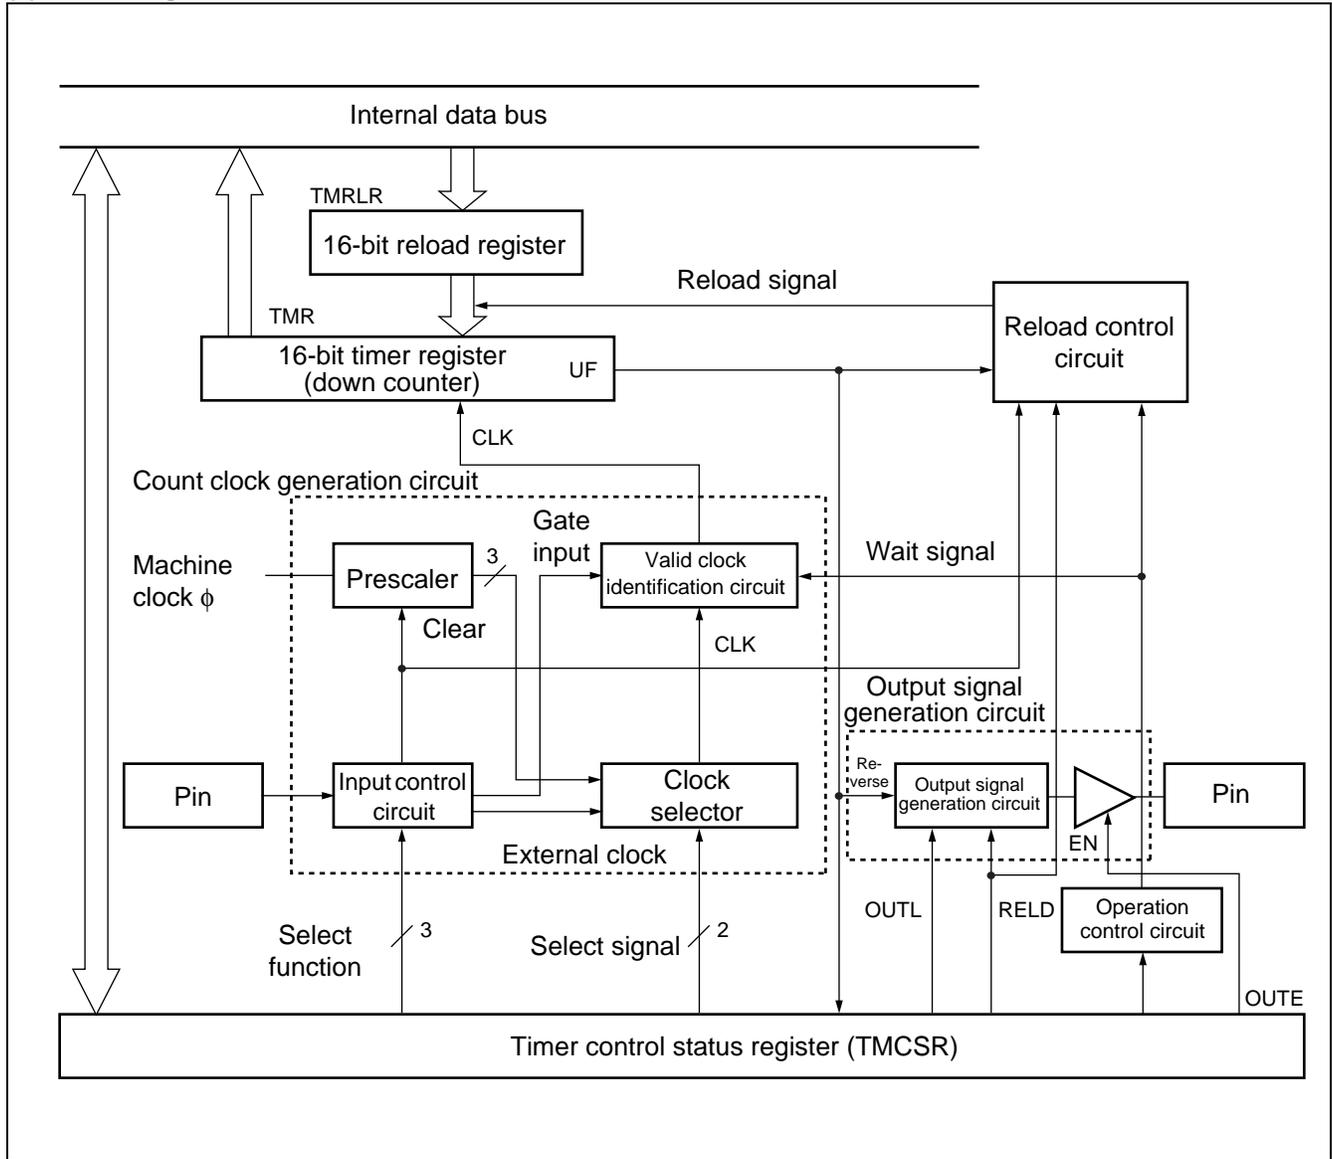


11. Watch timer

The watch timer is a 15-bit timer using the subclock. It can generate the interrupt request for each interval time. The watch timer can also be used as the clock source of the watchdog timer by setting so.

(1) Register list

| Watch timer control register (WTC) | | | | | | | | Initial Value | |
|------------------------------------|-------|-----|------|------|-----|------|------|---------------|-----------------------|
| 0000AA _H | bit 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 1X011000 _B |
| | WDCS | SCE | WTIE | WTOF | WTR | WTC2 | WTC1 | WTC0 | Read/Write |
| | R/W | R | R/W | R/W | R/W | R/W | R/W | R/W | |

(2) Block diagram

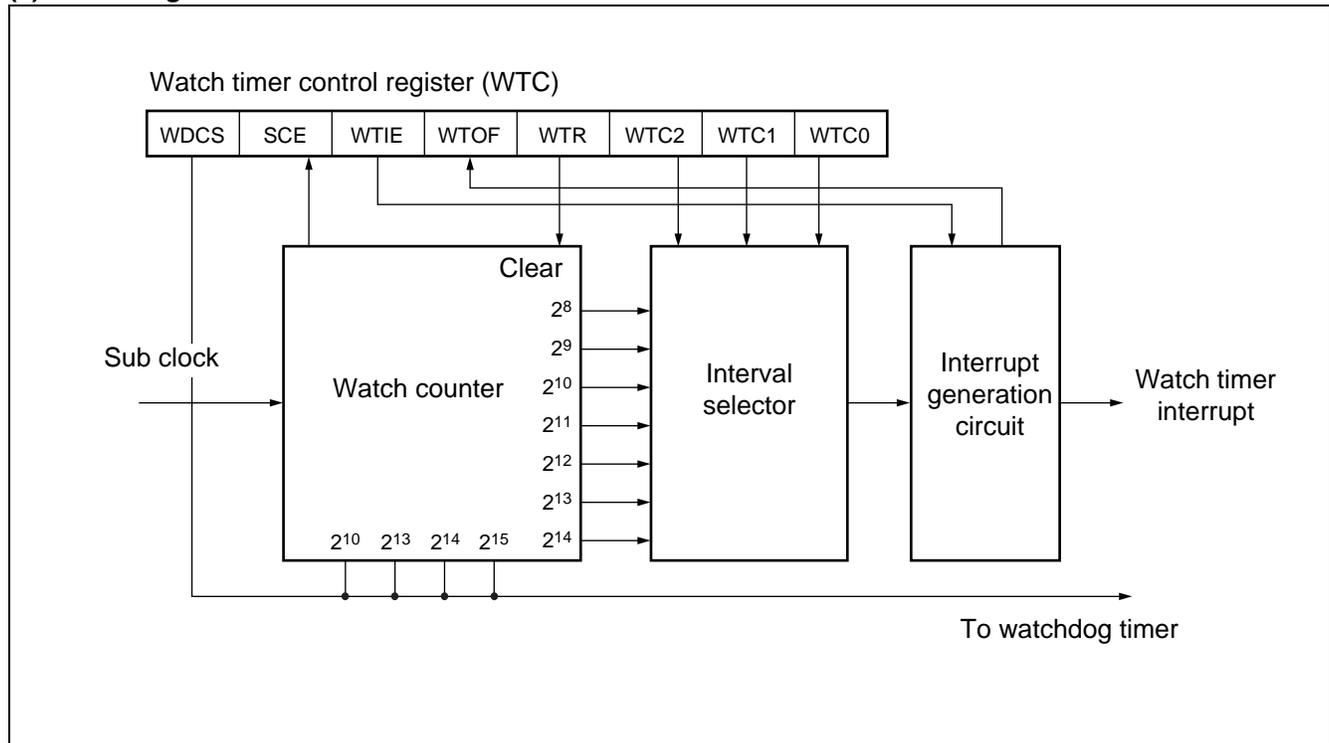

12. Watchdog timer


The watchdog timer is a timer counter provided for preventing program malfunction. The watchdog timer is a 2-bit counter operating with an output of the timebase timer or watch timer as count clock and resets the CPU when the counter is not cleared within the interval time.

(1) Register list

| Watchdog timer control register (WDTC) | | | | | | | | Initial Value | |
|--|------|---|------|------|------|-----|-----|---------------|-----------------------|
| bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | XXXXX111 _B |
| 0000A8 _H | PONR | — | WRST | ERST | SRST | WTE | WT1 | WT0 | Read/Write |
| | R | — | R | R | R | W | W | W | |

— : Unused

(2) Block diagram

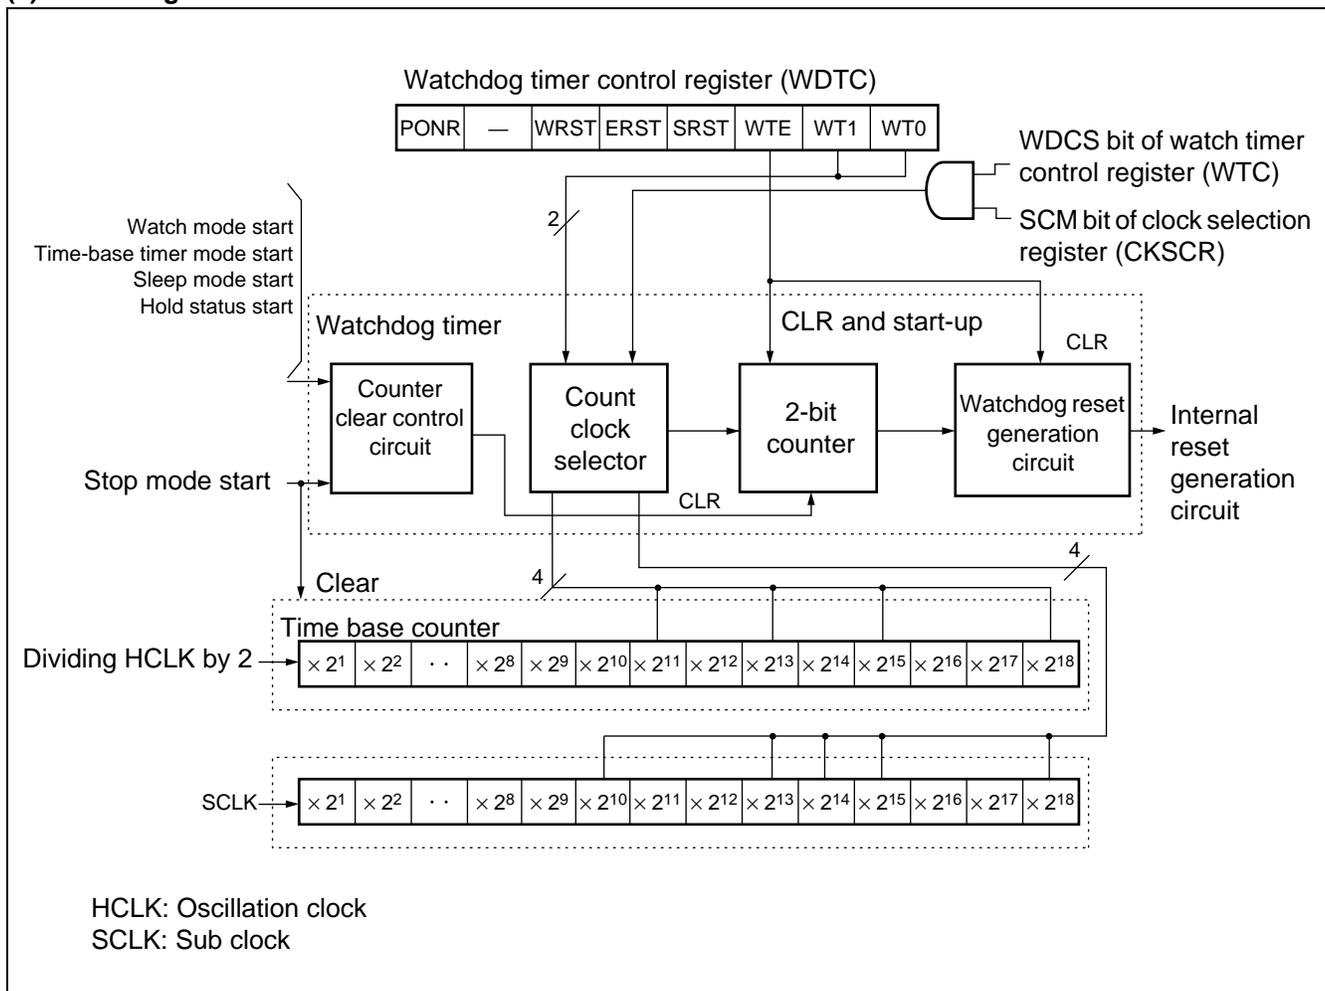

MB90800 Series

13. Time-base timer


The time-base timer has a function that enables a selection of four interval times using 18-bit free-run counter (time-base counter) with synchronizing to the internal count clock (two division of original oscillation). Furthermore, the function of timer output of oscillation stabilization wait or function supplying operation clocks for watchdog timer are provided.

(1) Register list

| Time-base timer control register (TBTC) | | | | | | | | Initial Value | |
|---|----------|----|----|------|------|-----|------|---------------|--------------|
| bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | |
| 0000A9H | Reserved | — | — | TBIE | TBOF | TBR | TBC1 | TBC0 | 1 - - 00100B |
| | R/W | — | — | R/W | R/W | W | R/W | R/W | Read/Write |

- : Unused

(2) Block diagram

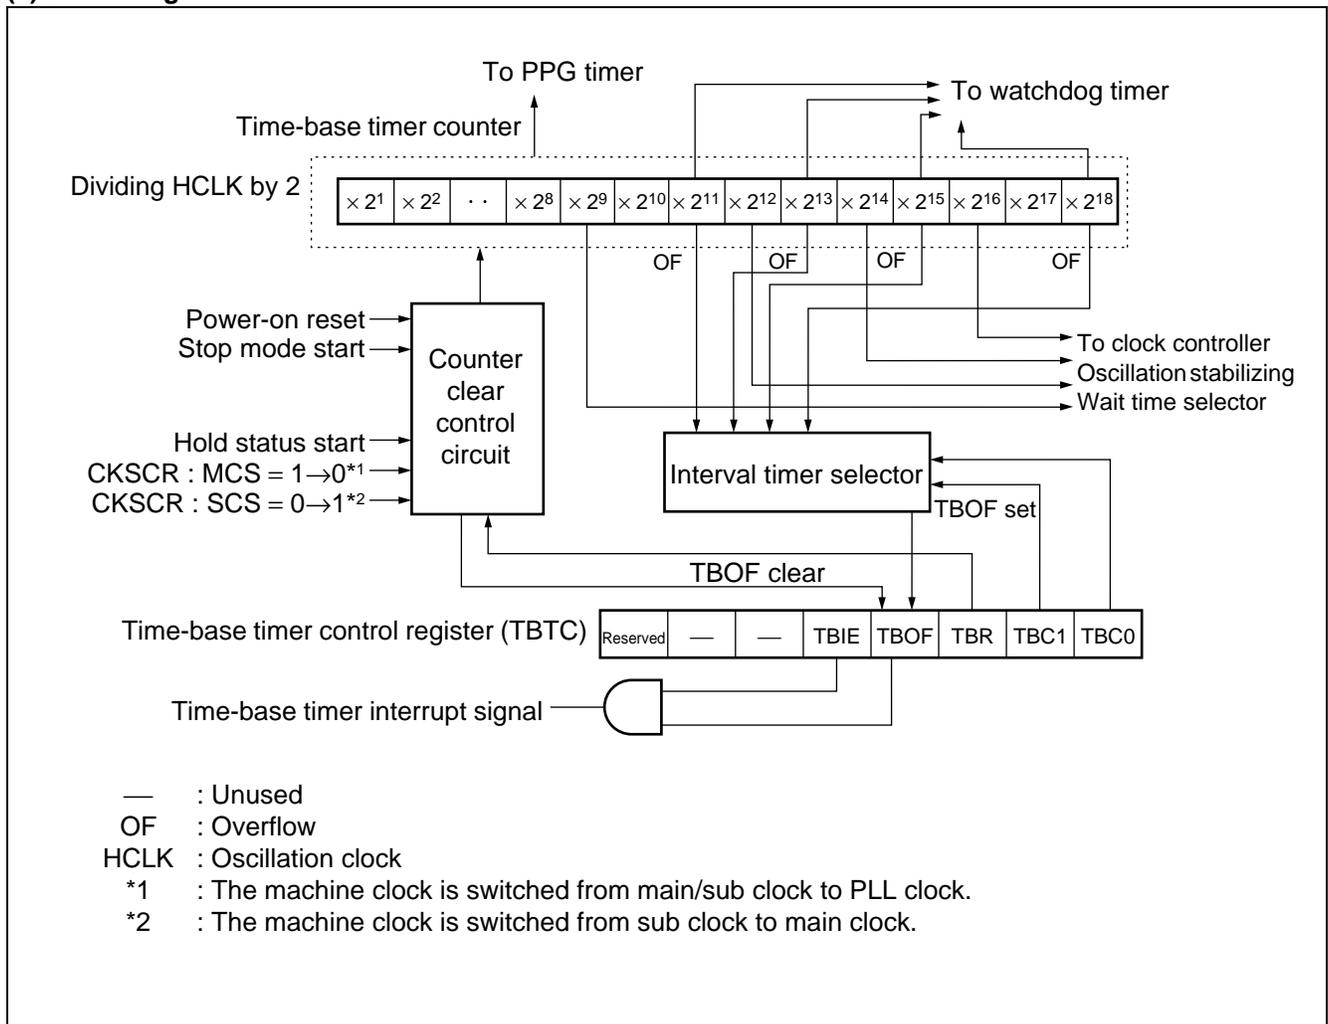


14. Clock generator

The clock generator controls operation of the internal clock which is the operation clock for the CPU and peripheral devices. This internal clock is used as machine clock and its one cycle as machine cycle. In addition, the clock generated by original oscillation is used as oscillation clock and that by internal PLL oscillation as PLL clock.


(1) Register list

| Clock selection register (CKSCR) | | | | | | | | Initial Value | |
|----------------------------------|-----|-----|-----|-----|-----|-----|-----|---------------|-----------------------|
| bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | |
| 0000A1 _H | SCM | MCM | WS1 | WS0 | SCS | MCS | CS1 | CS0 | 11111100 _B |
| | R | R | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |

(2) Block diagram

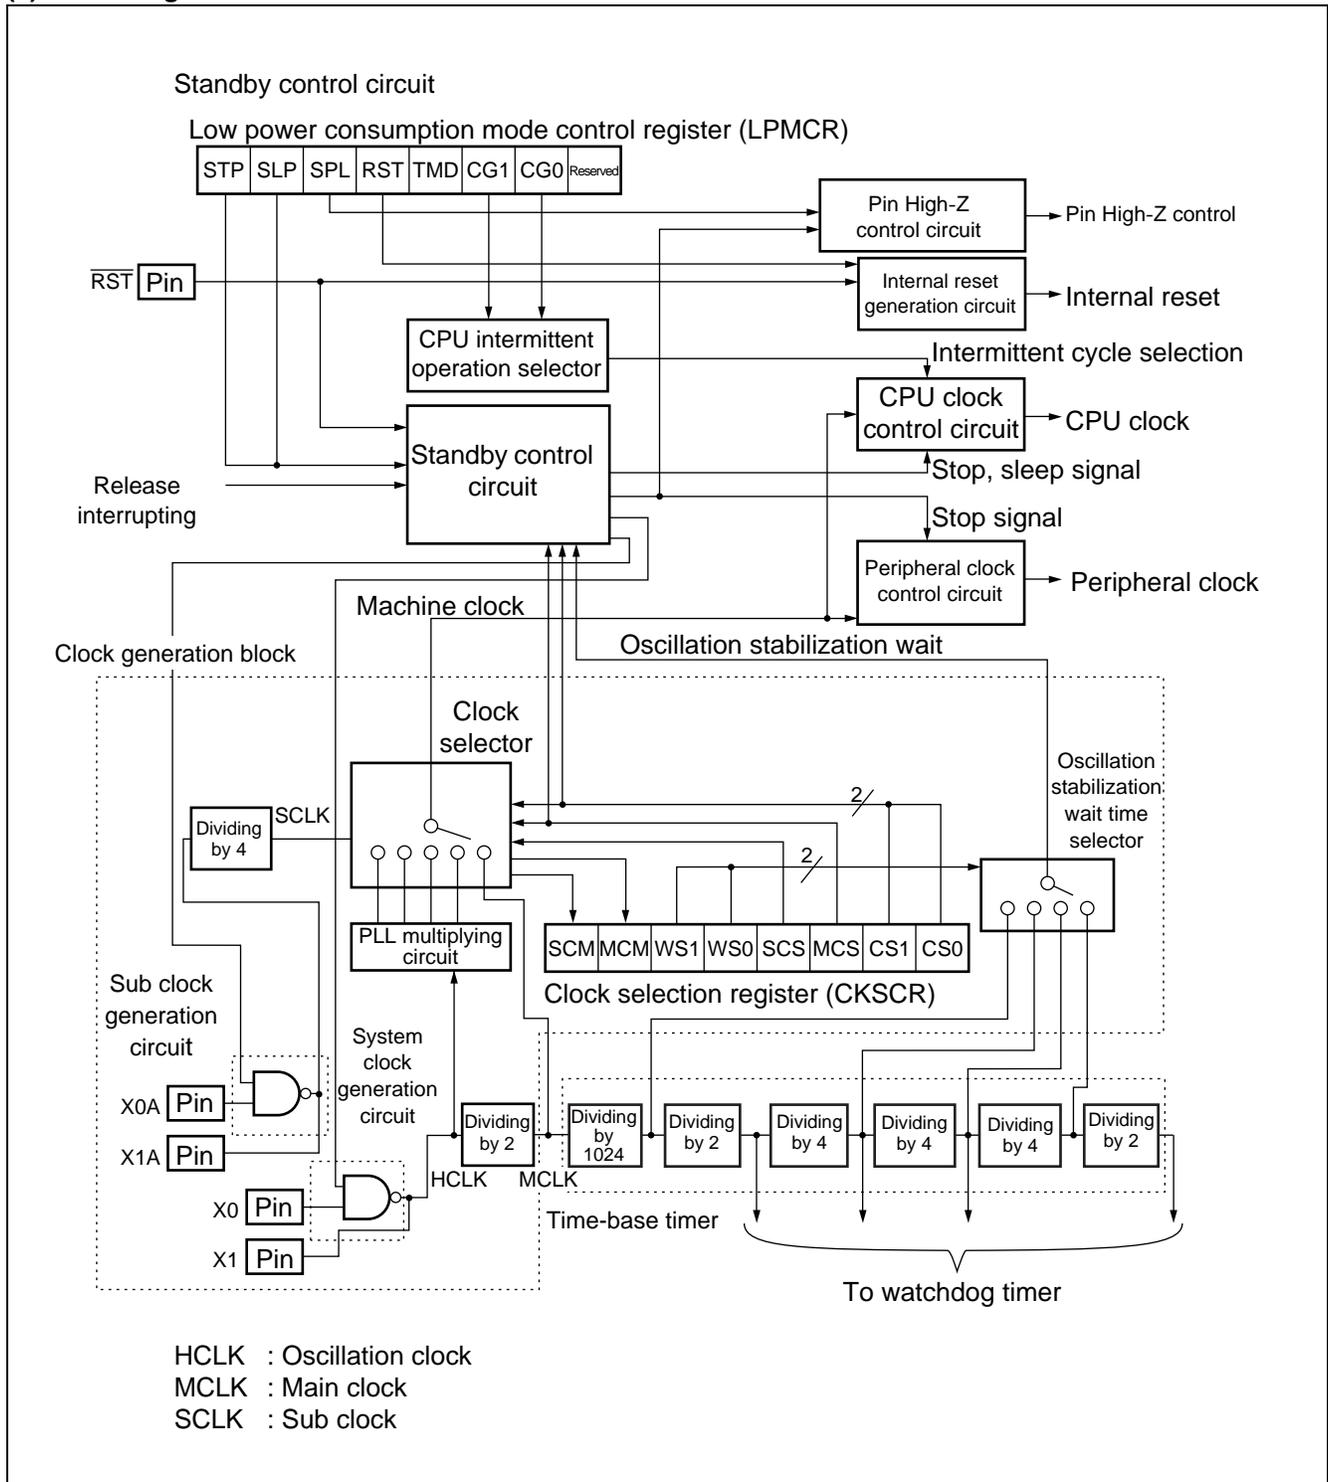

(3) Clock supply map

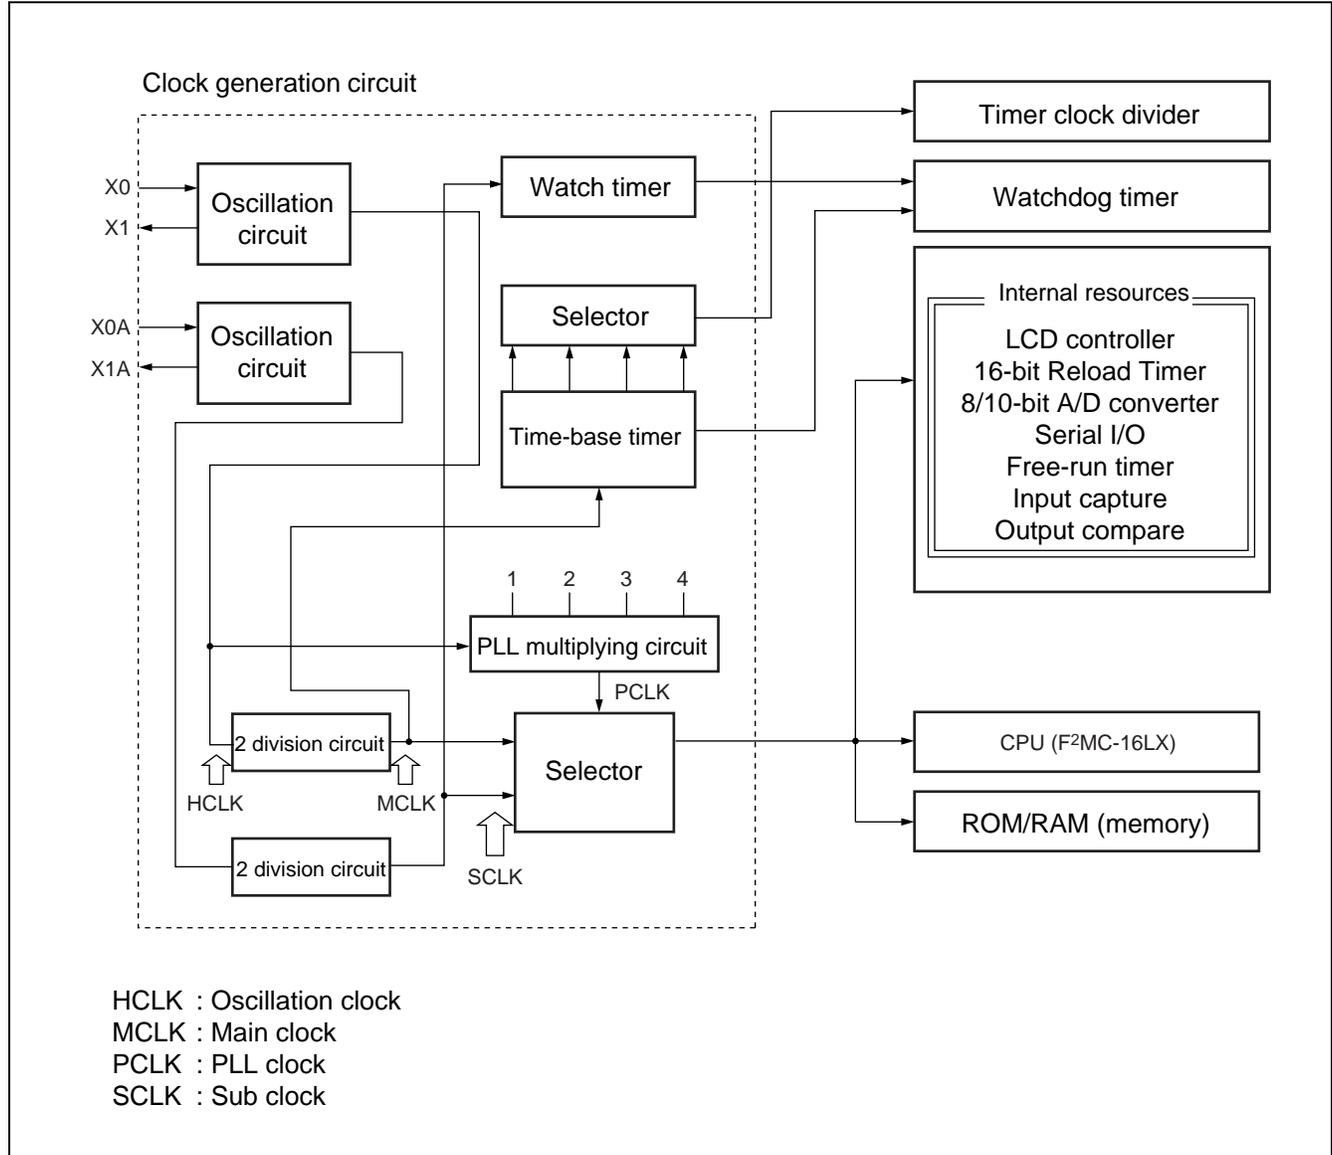

15. Low power consumption mode


The low-power consumption mode has the following CPU operation modes by selecting the operation clock and operating the control of the clock.

- Clock mode
(PLL clock mode, main clock mode and sub clock mode)
- CPU intermittent operation mode
(PLL clock intermittent operation mode, main clock intermittent operation mode and subclock intermittent operation mode)
- Standby mode
(Sleep mode, time base timer mode, stop mode and watch mode)


(1) Register list

| Low power consumption mode control register (LPMCR) | | | | | | | | Initial Value | |
|---|-----|-----|-----|-----|-----|-----|-----|---------------|-----------------------|
| bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0000A0 _H | STP | SLP | SPL | RST | TMD | CG1 | CG0 | Reserved | 00011000 _B |
| | W | W | R/W | W | R/W | R/W | R/W | R/W | Read/Write |

(2) Block diagram

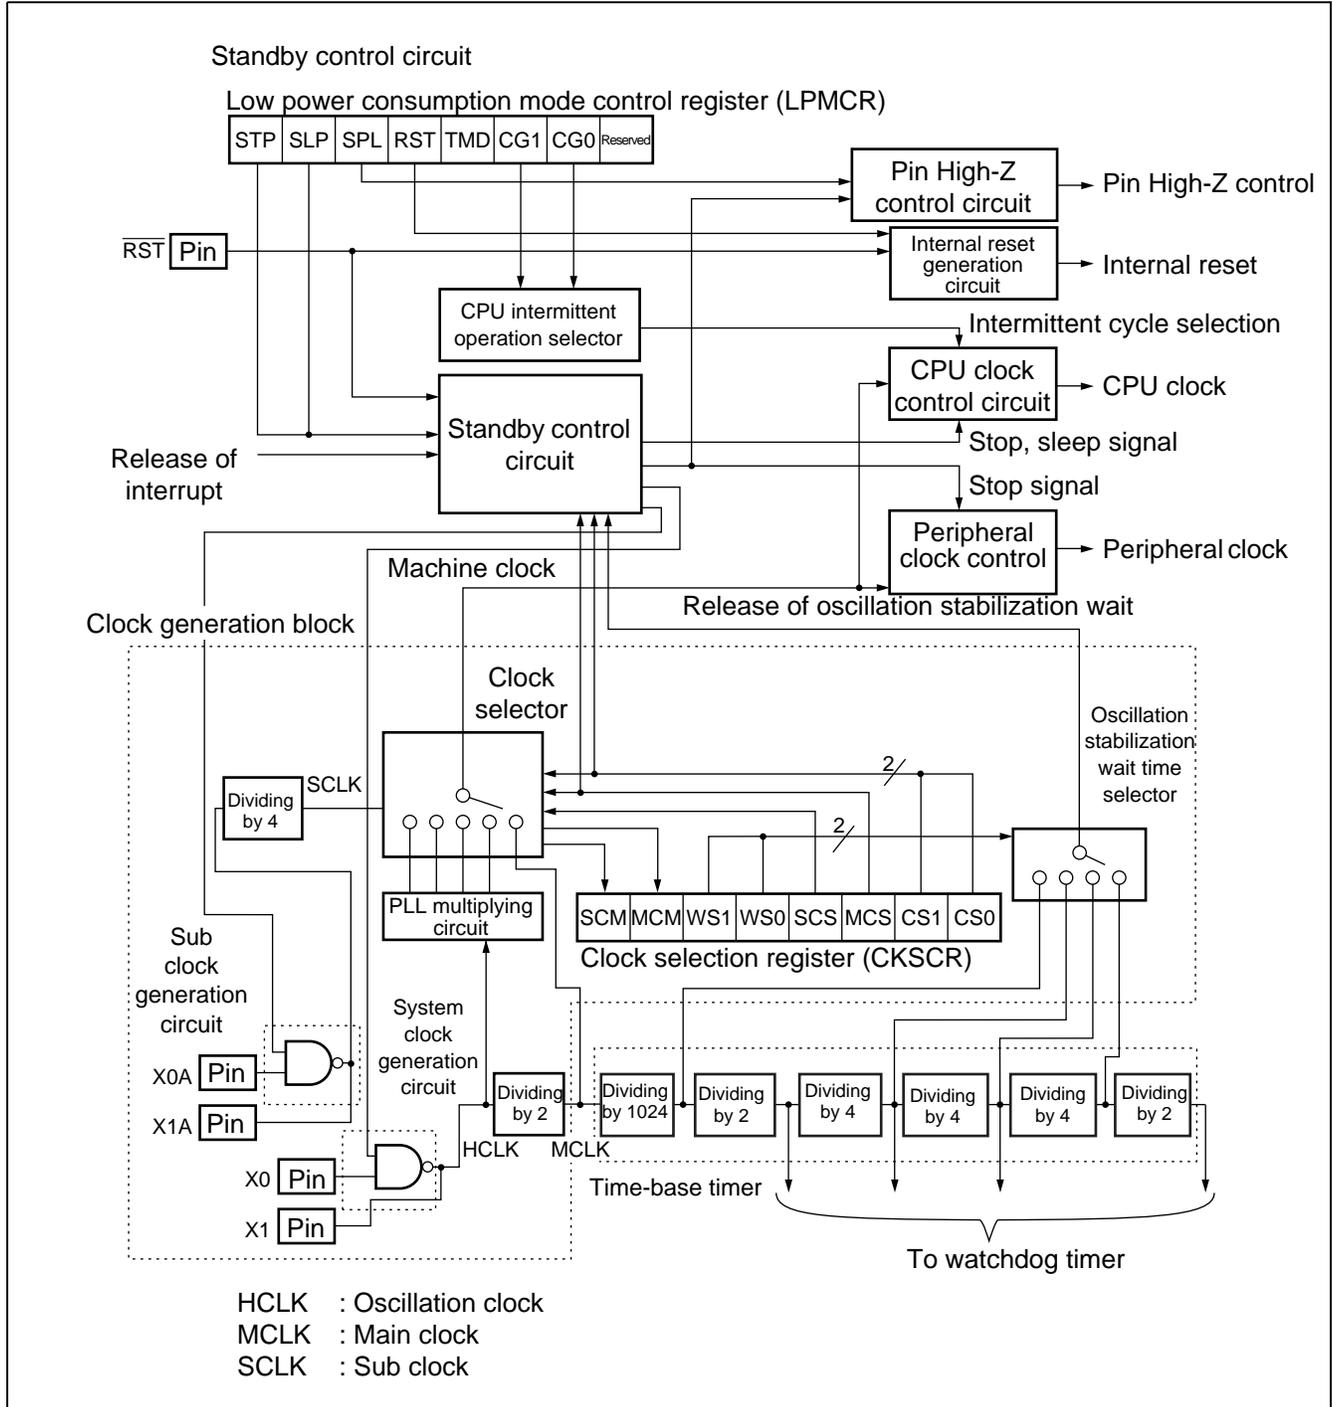

(3) Figure of status transition

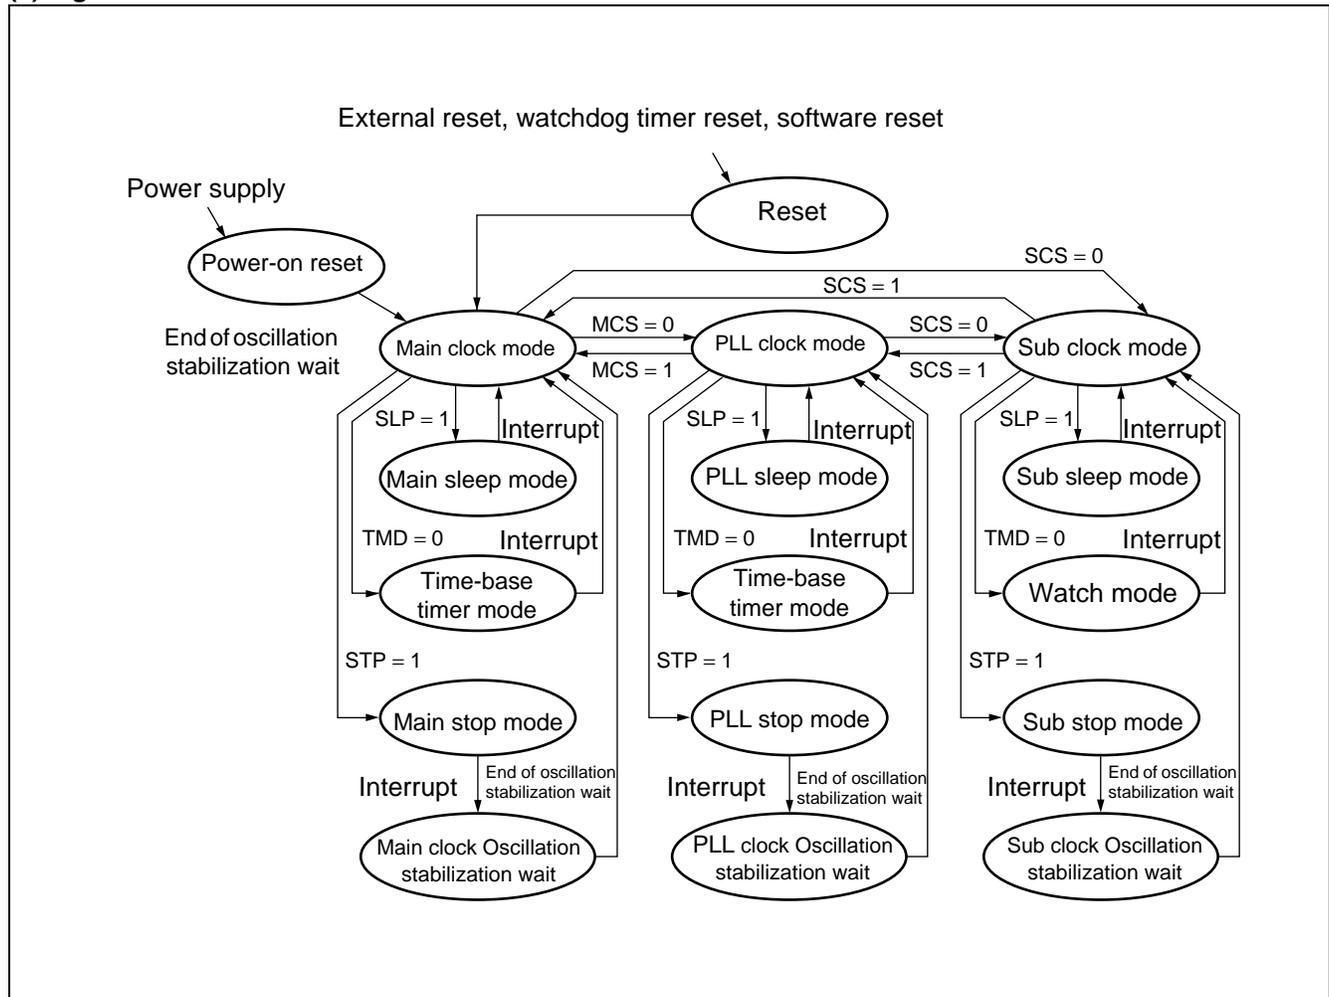

16. Timer clock output

The timer clock output circuit divides the oscillation clock by the time-base timer and generates and outputs the set division clock. Selectable from 32/64/128/256 division of the oscillation clock.

The timer clock output circuit is inactive in reset or stop mode. It is active in normal run, sleep, or pseudo-timer mode.


| | PLL_Run | Main_Run | Sleep | Pseudo clock | STOP | Reset |
|------------------|---------|----------|-------|--------------|------|-------|
| Operation status | ○ | ○ | ○ | ○ | × | × |

Note : When the time-base timer is cleared while using the timer clock output circuit, the clock is not correctly output.
For detail of the time-base timer's clear condition, see the section of time-base timer in the MB90800 Hardware Manual.

(1) Register list

| Watch clock output control register (TMCS) | | | | | | | | Initial Value | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----|----|----|----|-----|-----|-----|---------------|----|----|----|----|----|---|---|---|---|---|---|---|-----|-----|-----|---|---|---|---|---|-----|-----|-----|-----------------------|
| <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">0000AF_H</div> <table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td style="width: 20px;">15</td><td style="width: 20px;">14</td><td style="width: 20px;">13</td><td style="width: 20px;">12</td><td style="width: 20px;">11</td><td style="width: 20px;">10</td><td style="width: 20px;">9</td><td style="width: 20px;">8</td> </tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>TEN</td><td>TS1</td><td>TS0</td> </tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>R/W</td><td>R/W</td><td>R/W</td> </tr> </table> </div> | | | | | | | | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | — | — | — | — | — | TEN | TS1 | TS0 | — | — | — | — | — | R/W | R/W | R/W | XXXXX000 _B |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | — | TEN | TS1 | TS0 | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | — | R/W | R/W | R/W | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | Read/Write | | | | | | | | | | | | | | | | | | | | | | | | |
| - : Unused | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

(2) Block diagram

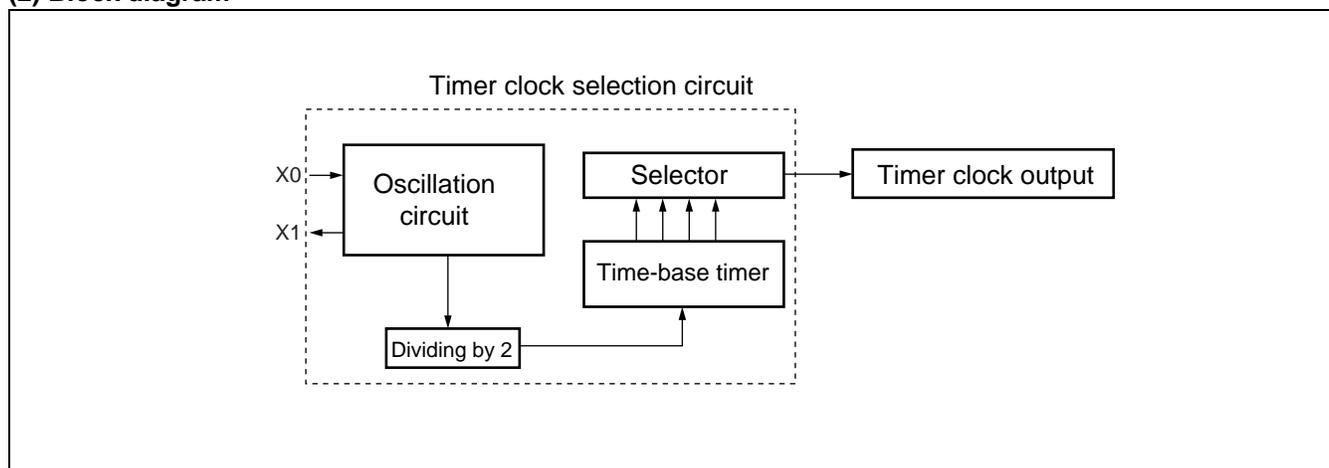

17. ROM mirroring function selection module


ROM mirroring function selection module provides the setting so that ROM data located in FF bank can be read by access to 00 bank.

(1) Register list

| ROM mirror function select register (ROMM) | | | | | | | | Initial Value | |
|--|--------|----|----|----|----|----|---|---------------|------------------------|
| 00006FH | bit 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | XXXXXXXX1 _B |
| | — | — | — | — | — | — | — | MI | |
| | — | — | — | — | — | — | — | R/W | Read/Write |

- : Unused

(2) Block diagram

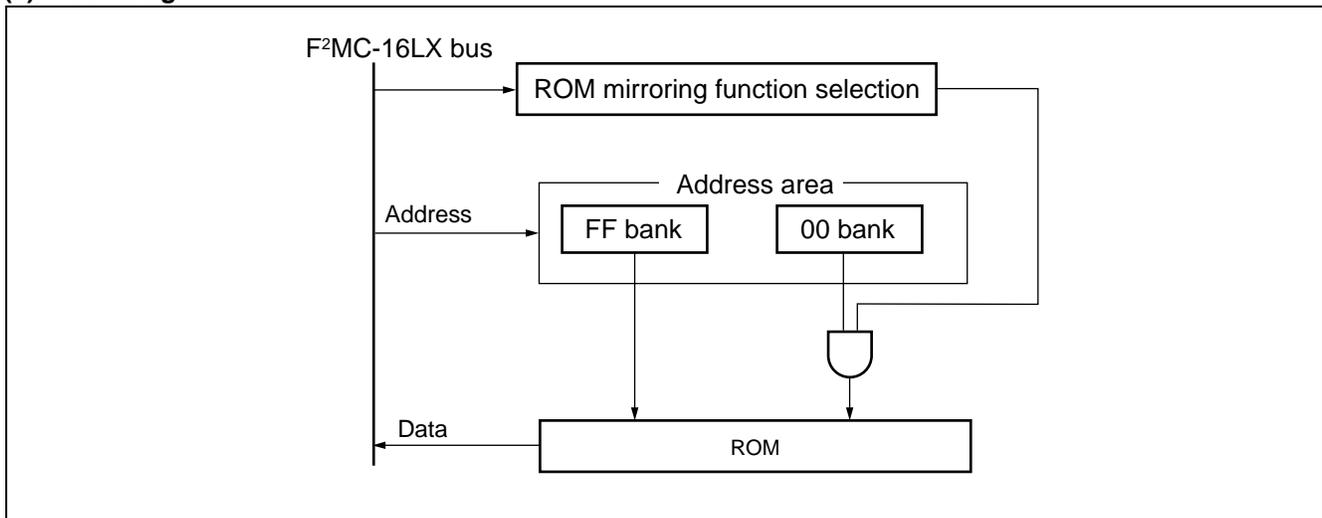

Note : Do not access to ROM mirroring function selection register in the middle of the operation of the address 008000_H to 00FFFF_H.

18. Interrupt controller

Interrupt control register is in the interrupt controller. The register corresponds to all I/O of interrupt function. The register has following functions;

- Setting of Interrupt level at correspondent peripheral circuit.

(1) Register list (at writing)

| | | |
|---|---|---------------|
| Interrupt control register | | Initial Value |
| Address : | | |
| ICR01 0000B1H | | 00000111B |
| ICR03 0000B3H | | |
| ICR05 0000B5H | | |
| ICR07 0000B7H | | |
| ICR09 0000B9H | | |
| ICR11 0000BBH | | |
| ICR13 0000BDH | | |
| ICR15 0000BFH | | |
| | W W W W R/W R/W R/W R/W | Read/Write |
| Interrupt control register | | Initial Value |
| Address : | | |
| ICR00 0000B0H | | 00000111B |
| ICR02 0000B2H | | |
| ICR04 0000B4H | | |
| ICR06 0000B6H | | |
| ICR08 0000B8H | | |
| ICR10 0000BAH | | |
| ICR12 0000BCH | | |
| ICR14 0000BEH | | |
| | W W W W R/W R/W R/W R/W | Read/Write |
| Note : Do not access using read modify write instruction because it causes the malfunction. | | |

MB90800 Series


(2) Register list (at reading)

Interrupt control register

Initial Value

Address :

ICR01 0000B1H
 ICR03 0000B3H
 ICR05 0000B5H
 ICR07 0000B7H
 ICR09 0000B9H
 ICR11 0000BBH
 ICR13 0000BDH
 ICR15 0000BFH

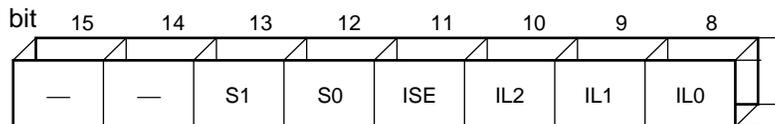

00000111B

Read/Write
 Initial Value

— — R R R/W R/W R/W R/W


Read/Write

Interrupt control register

Initial Value

Address :

ICR00 0000B0H
 ICR02 0000B2H
 ICR04 0000B4H
 ICR06 0000B6H
 ICR08 0000B8H
 ICR10 0000BAH
 ICR12 0000BCH
 ICR14 0000BEH

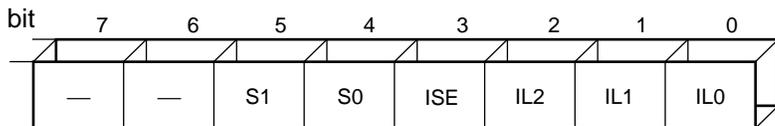

00000111B

Read/Write
 Initial Value


— — R R R/W R/W R/W R/W

Read/Write

- : Unused

Note : Do not access using read modify write instruction because it causes the malfunction.

(3) Block diagram

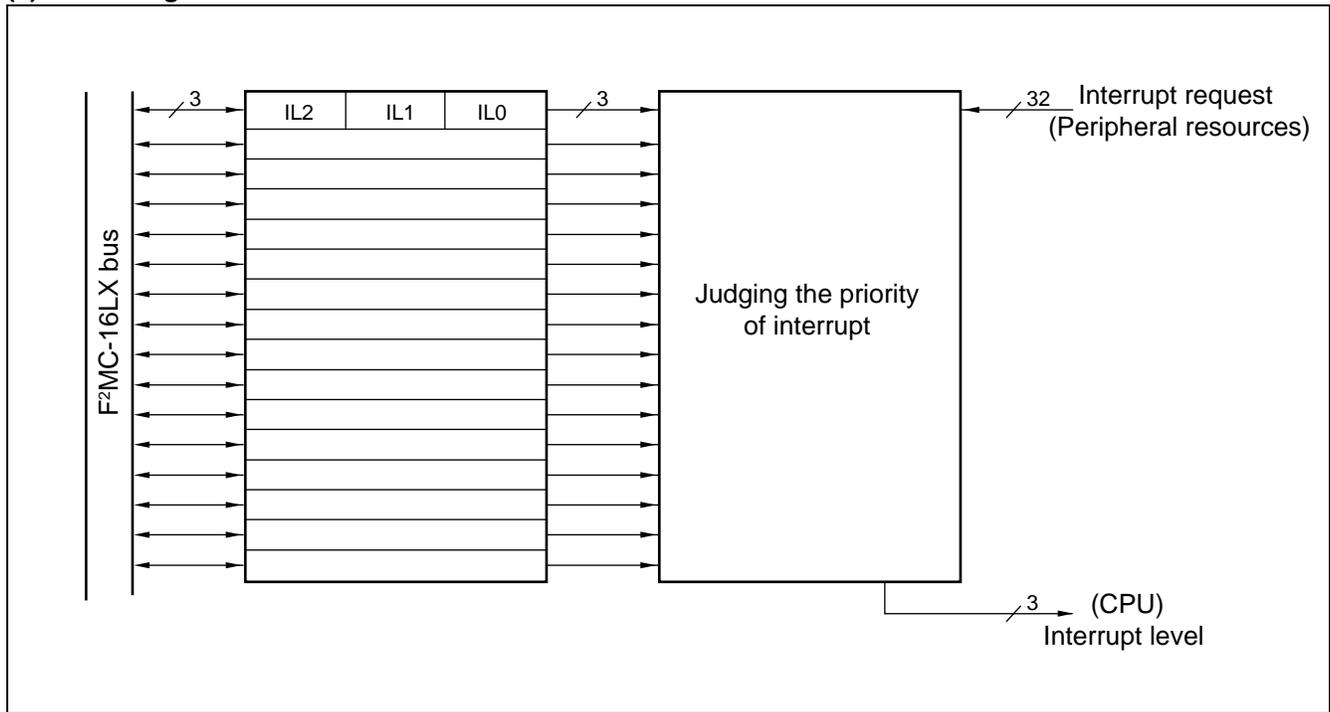

19. LCD controller/driver

The LCD controller/driver contains 24 × 8-bit display data memory and controls the LCD display with four common output lines and 48 segment output lines. Three duty outputs can be selected to directly drive the LCD panel (liquid crystal display).

- Contains an LCD driving voltage split resistor. Moreover, the external division resistance can be connected.
- A maximum of four common output lines (COM0 to COM3) and 48 segment output lines (SEG0 to SEG47) are available.
- Contains 24-byte display data memory (display RAM).
- For the duty, 1/2, 1/3, or 1/4 can be selected (restricted by bias setting).
- The LCD can directly be driven.

| Bias | 1/2 duty | 1/3 duty | 1/4 duty |
|----------|----------|----------|----------|
| 1/2 bias | ○ | × | × |
| 1/3 bias | × | ○ | ○ |


○ : Recommended mode

× : Disable

(1) Register list

| | | | | | | | | | |
|--|----------|----------|------|-----|-----|-----|-----|-----|-----------------------|
| • LCDC control register (upper) (LCRH) | | | | | | | | | |
| bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | Initial Value |
| 00005D _H | SS4 | VS0 | CS1 | CS0 | SS3 | SS2 | SS1 | SS0 | 00000000 _B |
| | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| • LCDC control register (lower) (LCRL) | | | | | | | | | |
| bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| 00005C _H | CSS | LCEN | VSEL | BK | MS1 | MS0 | FP1 | FP0 | 00010000 _B |
| | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |
| • LCDC range register (LCRR) | | | | | | | | | |
| bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Initial Value |
| 00005E _H | Reserved | Reserved | SE4 | SE3 | SE2 | SE1 | SE0 | LCR | 00000000 _B |
| | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | Read/Write |

(2) Block diagram

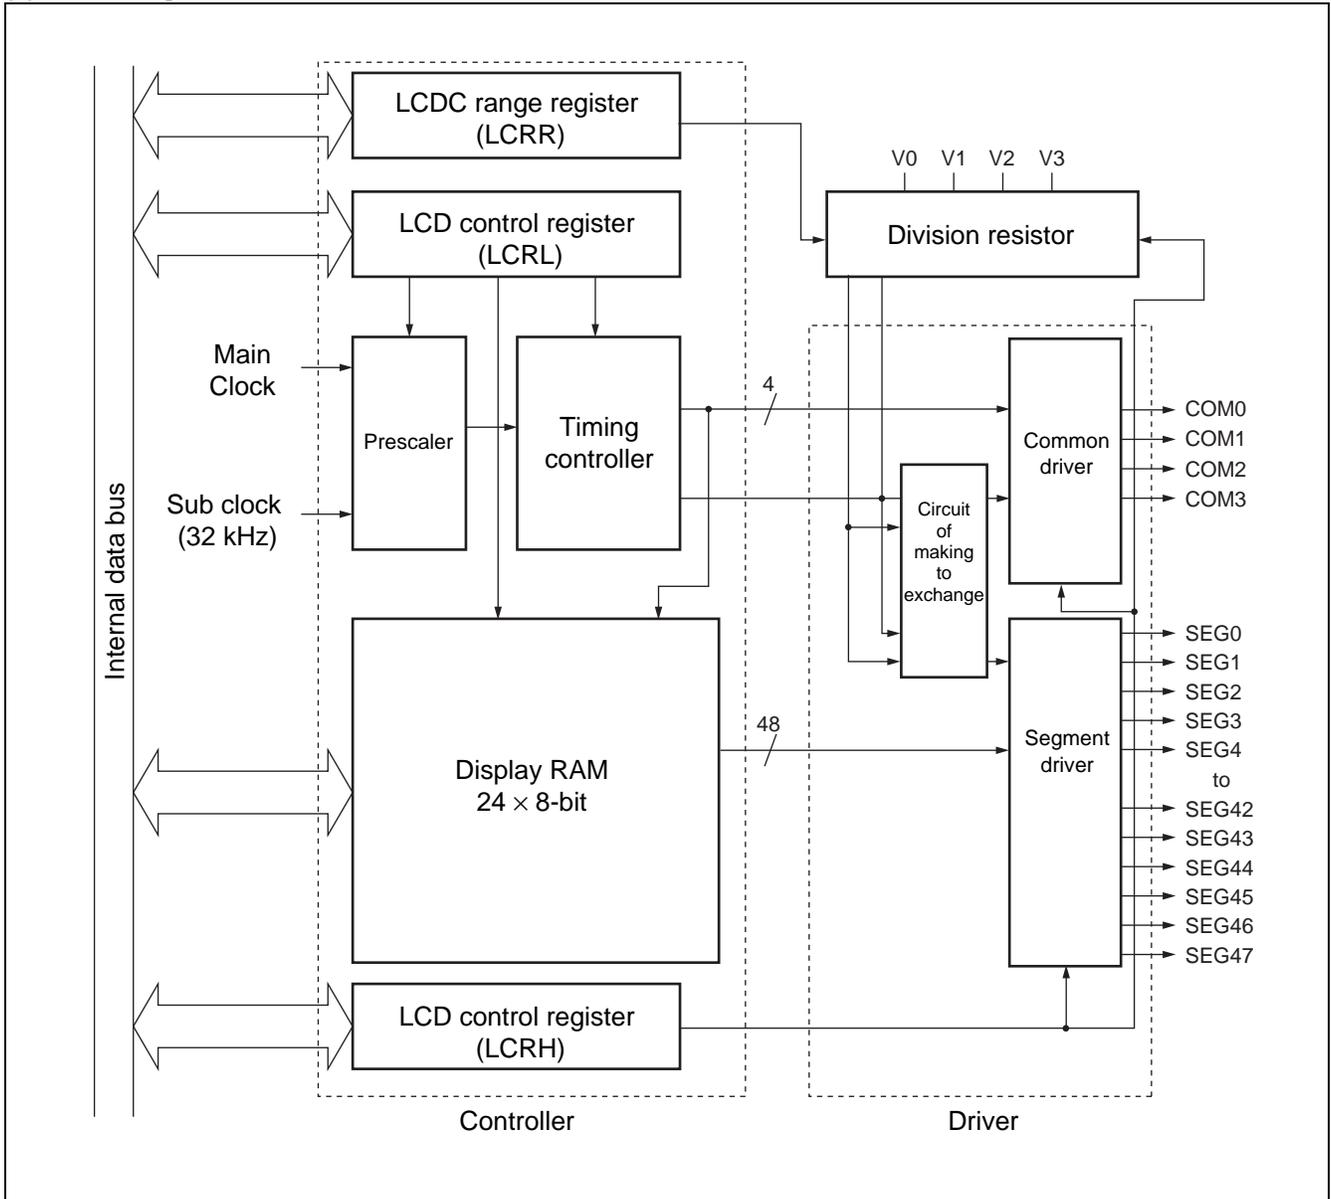

MB90800 Series

■ ELECTRICAL CHARACTERISTICS

1. Absolute Maximum Ratings

| Parameter | Symbol | Rating | | Unit | Remarks |
|--|-------------------|----------------|----------------|------|--|
| | | Min | Max | | |
| Power supply voltage*1 | V_{CC} | $V_{SS} - 0.3$ | $V_{SS} + 4.0$ | V | |
| | AV_{CC} | $V_{SS} - 0.3$ | $V_{SS} + 4.0$ | V | $V_{CC} \geq AV_{CC}$ *2 |
| Input voltage*1 | V_I | $V_{SS} - 0.3$ | $V_{SS} + 4.0$ | V | *3 |
| | | $V_{SS} - 0.3$ | $V_{SS} + 6.0$ | V | N-ch open-drain (5 V withstand voltage/O) *4 |
| Output voltage*1 | V_O | $V_{SS} - 0.3$ | $V_{SS} + 4.0$ | V | *3 |
| “L” level maximum output current | I_{OL11} | — | 10 | mA | Other than P74, P75, P40 to P47*5 |
| | I_{OL12} | — | 30 | mA | P74, P75, P40 to P47 (Heavy-current output port) *5 |
| “L” level average output current | I_{OLAV1} | — | 3 | mA | Other than P74, P75, P40 to P47*6 |
| | I_{OLAV2} | — | 15 | mA | P74, P75, P40 to P47 (Heavy-current output port) *6 |
| “L” level maximum total output current | ΣI_{OL} | — | 120 | mA | |
| “L” level average total output current | ΣI_{OLAV} | — | 60 | mA | *7 |
| “H” level maximum output current | I_{OH11} | — | - 10 | mA | Other than P74, P75, P40 to P47*5 |
| | I_{OH12} | — | - 12 | mA | P40 to P47 (Heavy-current output port) *5 |
| “H” level average output current | I_{OHAV} | — | - 3 | mA | *6 |
| “H” level maximum total output current | ΣI_{OH} | — | - 120 | mA | |
| “H” level average total output current | ΣI_{OHAV} | — | - 60 | mA | *7 |
| Power consumption | P_d | — | 351 | mW | |
| Operating temperature | T_A | - 40 | + 85 | °C | |
| Storage temperature | T_{STG} | - 55 | + 150 | °C | |

*1 : The parameter is based on $V_{SS} = AV_{SS} = 0.0$ V.

*2 : AV_{CC} should not be exceeding V_{CC} at power-on etc.

*3 : V_I , V_O , should not exceed $V_{CC} + 0.3$ V.

*4 : Applicable to pins : P74, P75

*5 : A peak value of an applicable one pin is specified as a maximum output current.

*6 : An average current value of an applicable one pin within 100 ms is specified as an average output current.
(Average value is found by multiplying operating current by operating rate.)

*7 : An average current value of all pins within 100 ms is specified as an average total output current.
(Average value is found by multiplying operating current by operating rate.)

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

2. Recommended Operating Conditions

($V_{SS} = AV_{SS} = 0.0\text{ V}$)

| Parameter | Symbol | Value | | Unit | Remarks |
|-------------------------|-----------|----------------|----------------|------|--|
| | | Min | Max | | |
| Power supply voltage | V_{CC} | 2.7 | 3.6 | V | At normal operating |
| | | 1.8 | 3.6 | V | Stop operation state maintenance |
| “H” level input voltage | V_{IH} | $0.7 V_{CC}$ | $V_{CC} + 0.3$ | V | CMOS input pin |
| | V_{IHS} | $0.8 V_{CC}$ | $V_{CC} + 0.3$ | V | CMOS hysteresis input pin (Resisting pressure of 5 V is $V_{CC} = 5.0\text{ V}$) |
| | V_{IHM} | $V_{CC} - 0.3$ | $V_{CC} + 0.3$ | V | MD pin input |
| “L” level input voltage | V_{IL} | $V_{SS} - 0.3$ | $0.3 V_{CC}$ | V | CMOS input pin |
| | V_{ILS} | $V_{SS} - 0.3$ | $0.2 V_{CC}$ | V | CMOS hysteresis input pin |
| | V_{ILM} | $V_{SS} - 0.3$ | $V_{SS} + 0.3$ | V | MD pin input |
| Operating temperature | T_A | - 40 | + 85 | °C | |

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.

MB90800 Series

3. DC Characteristics

($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | | Unit | Remarks |
|---------------------------------------|------------|--|--|----------------|-----|----------------|------------------|------------------------------|
| | | | | Min | Typ | Max | | |
| “H” level output voltage | V_{OH} | Output pins other than P40 to P47, P74, P75 | $I_{OH} = -4.0 \text{ mA}$ | $V_{CC} - 0.5$ | — | V_{CC} | V | |
| | V_{OH1} | P40 to P47 | $I_{OH} = -8.0 \text{ mA}$ | $V_{CC} - 0.5$ | — | V_{CC} | V | Heavy-current output port |
| “L” level output voltage | V_{OL} | Output pins other than P40 to P47, P74, P75 | $I_{OL} = 4.0 \text{ mA}$ | V_{SS} | — | $V_{SS} + 0.4$ | V | |
| | V_{OL1} | P40 to P47 | $I_{OL} = 15.0 \text{ mA}$ | V_{SS} | — | $V_{SS} + 0.6$ | V | Heavy-current output port |
| | V_{OL2} | P74, P75 | $I_{OL} = 15.0 \text{ mA}$ | — | 0.5 | $V_{SS} + 0.8$ | V | Open-drain pin |
| Open-drain output application voltage | V_{D1} | P74, P75 | — | $V_{SS} - 0.3$ | — | $V_{SS} + 5.5$ | V | |
| Input leak current | I_{IL} | All output pins | $V_{CC} = 3.3 \text{ V}$, $V_{SS} < V_I < V_{CC}$ | -10 | — | +10 | μA | |
| Pull-up resistor | R_{UP} | $\overline{\text{RST}}$ | $V_{CC} = 3.3 \text{ V}$, $T_A = +25 \text{ }^\circ\text{C}$ | 25 | 50 | 100 | $\text{k}\Omega$ | |
| Pull-down resistor | R_{DOWN} | MD2 | $V_{CC} = 3.3 \text{ V}$, $T_A = +25 \text{ }^\circ\text{C}$ | 25 | 50 | 100 | $\text{k}\Omega$ | Except Flash memory products |
| Open drain output current | I_{leak} | P74, P75 | — | — | 0.1 | 10 | μA | |
| Power supply current | I_{CC} | V_{CC} | $V_{CC} = 3.3 \text{ V}$, Internal frequency 25 MHz At normal operating | — | 48 | 60 | mA | |
| | | | $V_{CC} = 3.3 \text{ V}$, Internal frequency 25 MHz At Flash writing | — | 60 | 75 | mA | Flash memory products |
| | | | $V_{CC} = 3.3 \text{ V}$, Internal frequency 25 MHz At Flash erasing | — | 60 | 75 | mA | Flash memory products |
| | I_{CCS} | $V_{CC} = 3.3 \text{ V}$, Internal frequency 25 MHz at sleep mode | — | 22.5 | 30 | mA | | |

(Continued)

(Continued)

($V_{CC} = AV_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_A = -40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | | Unit | Remarks |
|--------------------------------|------------|--|--|-------|------|-----|---------------|-------------------|
| | | | | Min | Typ | Max | | |
| Power supply current | I_{CCTS} | V_{CC} | $V_{CC} = 3.3\text{ V}$, Internal frequency 3 MHz at timer mode | — | 0.75 | 7 | mA | |
| | I_{CCL} | | $V_{CC} = 3.3\text{ V}$, Internal frequency 8 kHz at subclock operation, ($T_A = +25\text{ }^\circ\text{C}$) | — | 15 | 140 | μA | MASK ROM products |
| | | | | | — | 0.5 | 0.9 | mA |
| | I_{CCLS} | | $V_{CC} = 3.3\text{ V}$, Internal frequency 8 kHz at subclock sleep operation, ($T_A = +25\text{ }^\circ\text{C}$) | — | 13 | 40 | μA | |
| | I_{CCT} | | $V_{CC} = 3.3\text{ V}$, Internal frequency 8 kHz at watch mode ($T_A = +25\text{ }^\circ\text{C}$) | — | 1.8 | 40 | μA | |
| | I_{CCH} | | At Stop mode, ($T_A = +25\text{ }^\circ\text{C}$) | — | 0.8 | 40 | μA | |
| LCD division resistance | R_{LCD} | $V_{CC} - V3$ | At LCR = 0 setting | 100 | 200 | 400 | k Ω | * |
| | | $V_{CC} - V3$ | At LCR = 1 setting | 12.5 | 25 | 50 | | |
| | | $V0 - V1$, $V1 - V2$, $V2 - V3$ | At LCR = 0 setting | 50 | 100 | 200 | | |
| | | $V0 - V1$, $V1 - V2$, $V2 - V3$ | At LCR = 1 setting | 6.25 | 12.5 | 25 | | |
| COM0 to COM3 output impedance | R_{VCOM} | COM0 to COM3 | $V1$ to $V3 = 3.3\text{ V}$ | — | — | 2.5 | k Ω | |
| SEG0 to SEG47 output impedance | R_{VSEG} | SEG0 to SEG47 | | — | — | 15 | k Ω | |
| LCD leak current | I_{LCDC} | $V0$ to $V3$, COM0 to COM3, SEG0 to SEG47 | — | -5 | — | +5 | μA | |

* : LCD internal divided resistor can be select two type resistor by internal divided resistor selecting bit (LCR) of LCDC range register (LCRR) .

MB90800 Series


4. AC Characteristics

(1) Clock timing


($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | | Unit | Remarks |
|-------------------------------------|--------------------------------------|------------------------------------|------------|-------|-----|------|--|---|
| | | | | Min | Typ | Max | | |
| Clock frequency | f _{CH} | X0, X1 | — | 3 | — | 16 | MHz | External crystal oscillation |
| | | | | 3 | | 16 | | × 1/2 (at PLL stop) At oscillation circuit |
| | | | | 4 | | 16 | | Multiply by 1 At oscillation circuit |
| | | | | 4 | | 12.5 | | Multiply by 2 At oscillation circuit |
| | | | | 4 | | 8.33 | | Multiply by 3 At oscillation circuit |
| | | | | 4 | | 6.25 | | Multiply by 4 At oscillation circuit |
| | | X0 | | 3 | | 25 | | × 1/2 (at PLL stop) At external clock |
| | | | | 4 | | 25 | | Multiply by 1 At external clock |
| | | | | 4 | | 12.5 | | Multiply by 2 At external clock |
| | | | | 4 | | 8.33 | | Multiply by 3 At external clock |
| 4 | 6.25 | Multiply by 4 At external clock | | | | | | |
| f _{CL} | X0A, X1A | — | 32.768 | — | kHz | | | |
| Clock cycle time | t _{H CYL} | X0, X1 | 40 | — | 333 | ns | | |
| | t _{L CYL} | X0A, X1A | — | 30.5 | — | μs | | |
| Input clock pulse width | P _{WH} P _{WL} | X0 | 5 | — | — | ns | Set duty ratio 50% ± 3% | |
| | P _{WLH} P _{WLL} | X0A | — | 15.2 | — | μs | Set duty ratio at 30% to 70% as a guideline. | |
| Input clock rise time and fall time | t _{cr} t _{cf} | X0 | — | — | 5 | ns | At external clock | |
| Internal operating clock frequency | f _{CP} | — | 1.5 | — | 25 | MHz | When main clock is used | |
| | f _{CP1} | — | — | 8.192 | — | kHz | When sub clock is used | |
| Internal operating clock cycle time | t _{CP} | — | 40 | — | 666 | ns | When main clock is used | |
| | t _{CP1} | — | — | 122.1 | — | μs | When sub clock is used | |

- X0, X1 clock timing

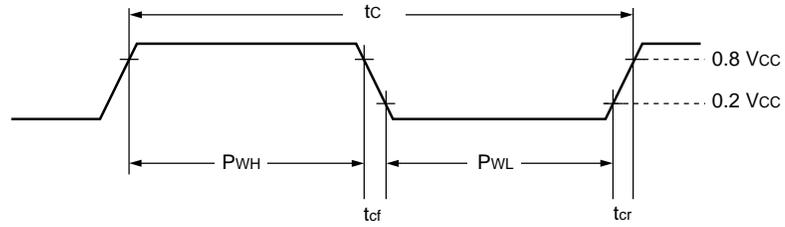


- X0A, X1A clock timing

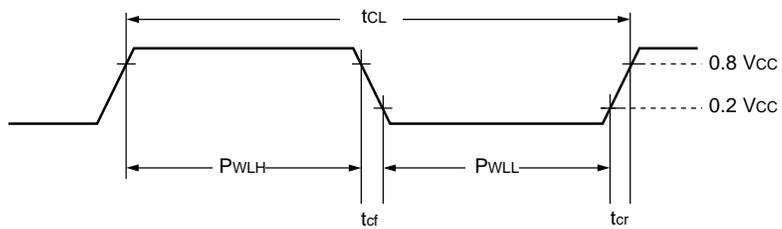


- PLL operation guarantee range

Relation between internal operation clock frequency and power supply voltage

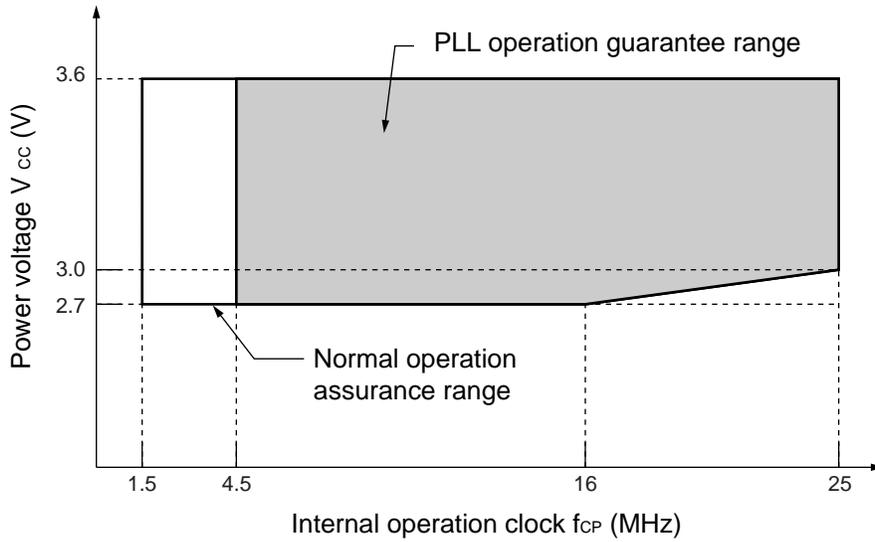


Relation between oscillation clock frequency and internal operating clock frequency

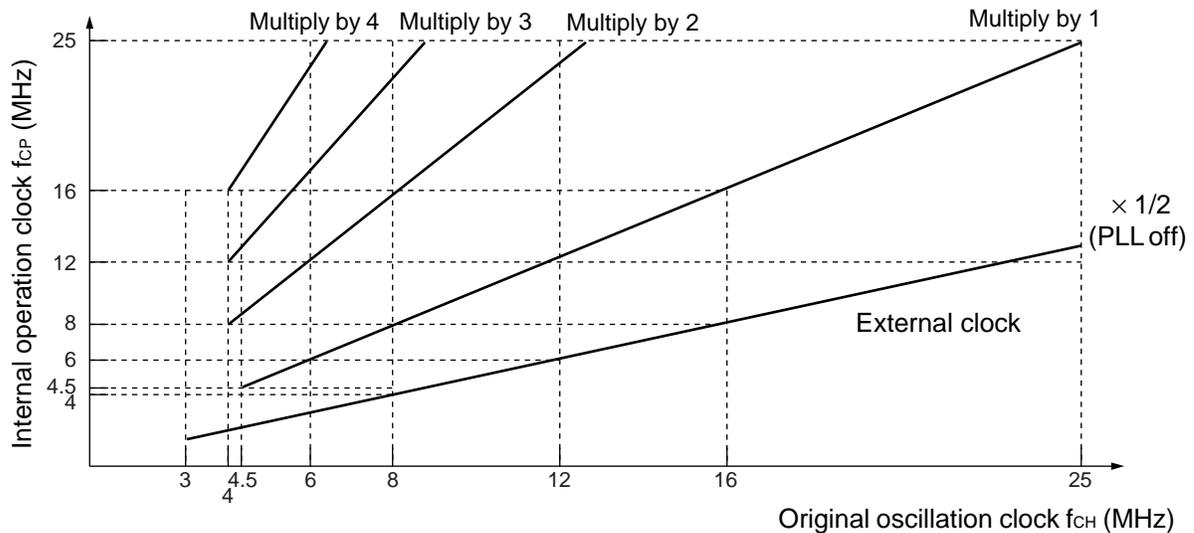

Rating values of alternating current is defined by the measurement reference voltage values shown below :


- Input signal waveform

Hysteresis input pin



- Output signal waveform

Output pin




(2) Reset input timing

($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | Unit | Remarks |
|------------------|------------|------------------|------------|---|-----|---------------|---|
| | | | | Min | Max | | |
| Reset input time | t_{RSTL} | \overline{RST} | — | 500 | — | ns | At normal operating, at time base timer mode, at main sleep mode, at PLL sleep mode |
| | | | | Oscillation time of oscillator*+ 500 ns | — | μs | At stop mode, at sub clock mode, at sub sleep mode, at watch mode |

* : Oscillation time of oscillator is time until oscillation reaches 90% of amplitude. It takes several milliseconds to several dozens of milliseconds on a crystal oscillator, several hundreds of microseconds to several milliseconds on a ceramic oscillator, and 0 milliseconds on an external clock.

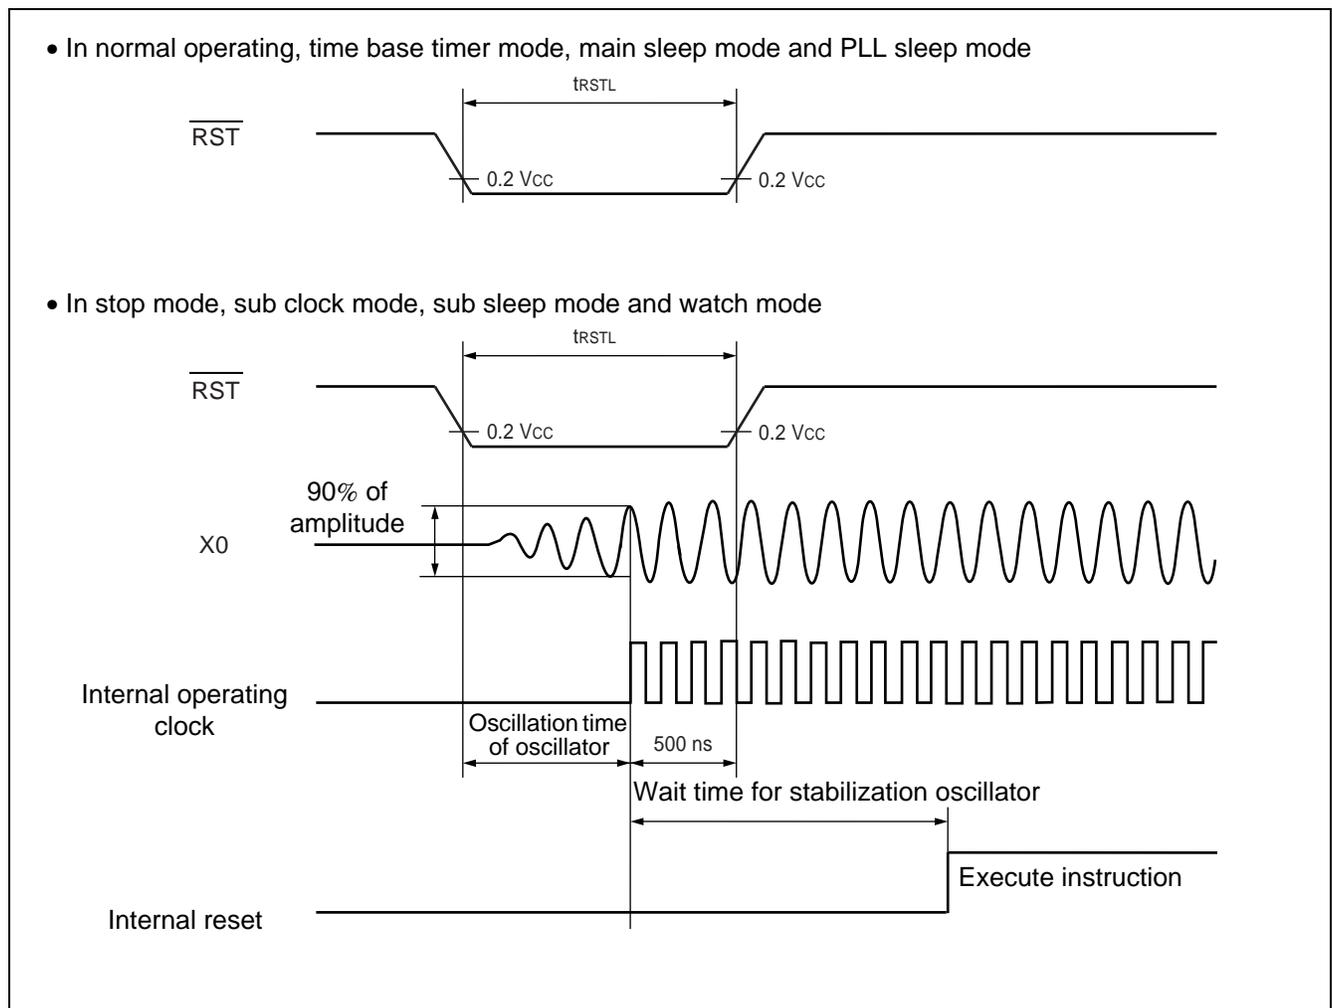


MB90800 Series

(3) Power-on reset


($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Condi- tions | Value | | Unit | Remarks |
|----------------------------|-----------|----------|-----------------|-------|-----|------|--------------------------|
| | | | | Min | Max | | |
| Power supply rising time | t_R | V_{CC} | — | — | 30 | ms | At normal operating |
| Power supply shutdown time | t_{OFF} | V_{CC} | — | 1 | — | ms | Wait time until power on |

- Notes :
- V_{CC} should be set under 0.2 V before power-on rising up.
 - These value are for power-on reset.
 - In the device, there are internal registers which is initialized only by a power-on reset. If these initialization is executing, power-on procedure must be obeyed by these value.

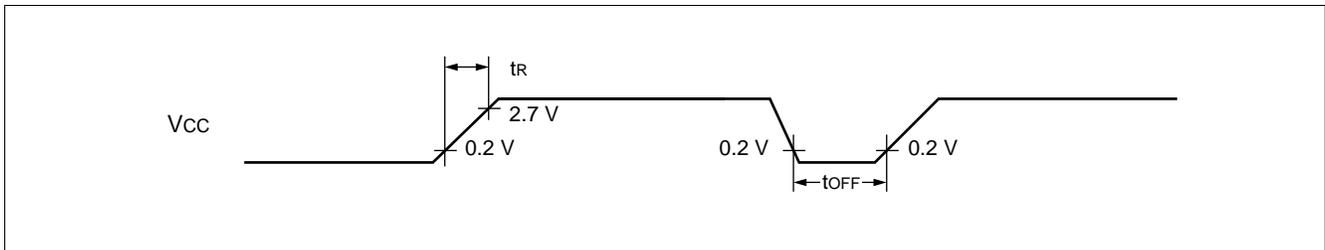

Note : Sudden change of power supply voltage may activate the power-on reset function. When changing power supply voltages during operation, raise the power smoothly by suppressing variation of voltages as shown below.

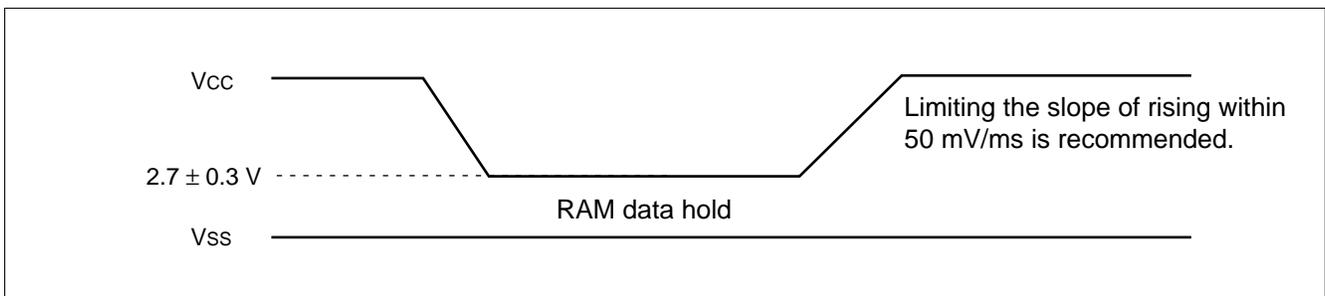


(4) Serial I/O

($V_{CC} = AV_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_A = -40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | Unit |
|------------------------------|------------|---------------------------|--|-------------|-----|------|
| | | | | Min | Max | |
| Serial clock cycle time | t_{SCYC} | SC0 to SC3 | Internal shift clock mode output pin : $C_L = 80\text{ pF} + 1\text{TTL}$ | $8\ t_{CP}$ | — | ns |
| SCK ↓ → SOT delay time | t_{SLOV} | SC0 to SC3, SO0 to SO3 | | -80 | +80 | ns |
| Valid SIN → SCK ↑ | t_{IVSH} | SC0 to SC3, SI0 to SI3 | | 100 | — | ns |
| SCK ↑ → Valid SIN hold time | t_{SHIX} | | 60 | — | ns | |
| Serial clock "H" pulse width | t_{SHSL} | SC0 to SC3 | External shift clock mode output pin : $C_L = 80\text{ pF} + 1\text{TTL}$ | $4\ t_{CP}$ | — | ns |
| Serial clock "L" pulse width | t_{SLSH} | | | $4\ t_{CP}$ | — | ns |
| SCK ↓ → SOT delay time | t_{SLOV} | SC0 to SC3, SO0 to SO3 | | — | 150 | ns |
| Valid SIN → SCK ↑ | t_{IVSH} | SC0 to SC3, SI0 to SI3 | 60 | — | ns | |
| SCK ↑ → valid SIN hold time | t_{SHIX} | | 60 | — | ns | |

- Notes :
- The above rating is in CLK synchronous mode.
 - C_L is a load capacitance value on pins for testing.
 - t_{CP} is machine cycle frequency (ns) . Refer to "(1) Clock timing".

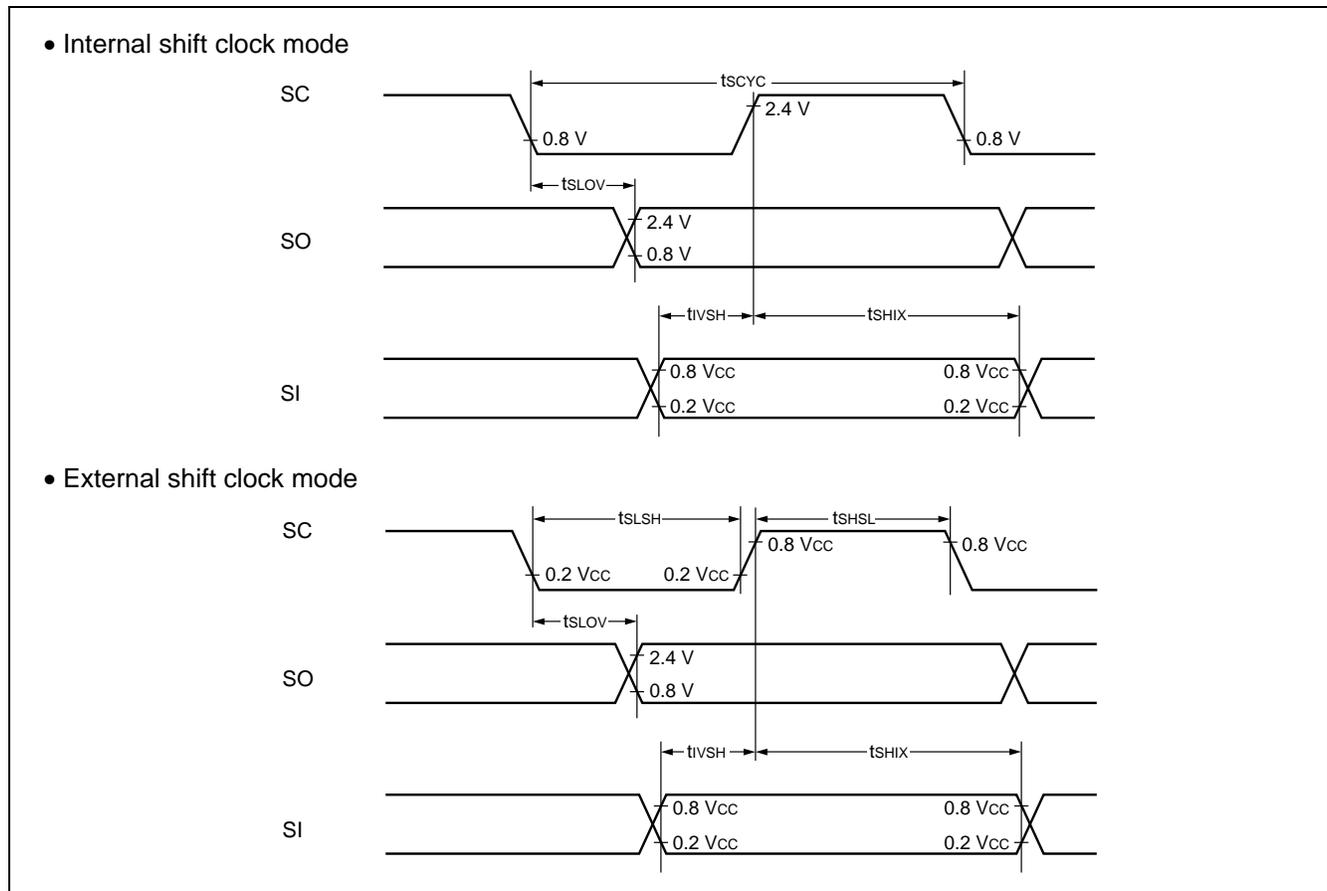


MB90800 Series

(5) Timer input timing

($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | Unit |
|-------------------|--------------------------|---------------------------|------------|------------|-----|------|
| | | | | Min | Max | |
| Input pulse width | t_{TIWH} t_{TIWL} | TIN0 to TIN2, IC0, IC1 | — | $4 t_{CP}$ | — | ns |


Note : t_{CP} is machine cycle frequency (ns) . Refer to “ (1) Clock timing”.

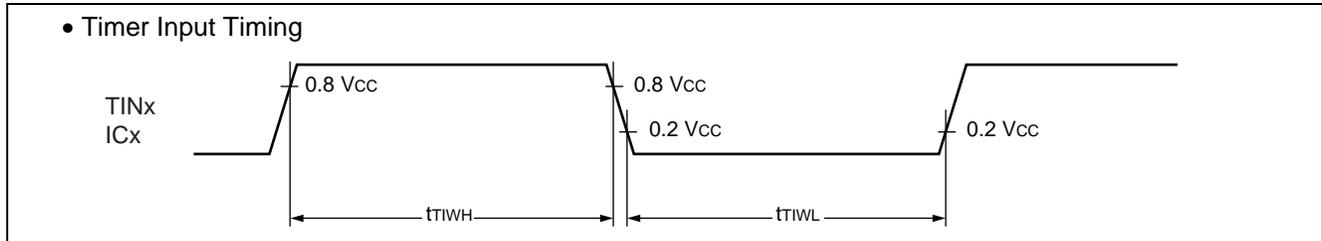

(6) Timer output timing

($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | Unit |
|---|----------|--|------------|-------|-----|------|
| | | | | Min | Max | |
| CLK \uparrow \rightarrow TOUT change time | t_{TO} | TOT0 to TOT2, PPG0, PPG1, OCU0, OCU1 | — | 30 | — | ns |

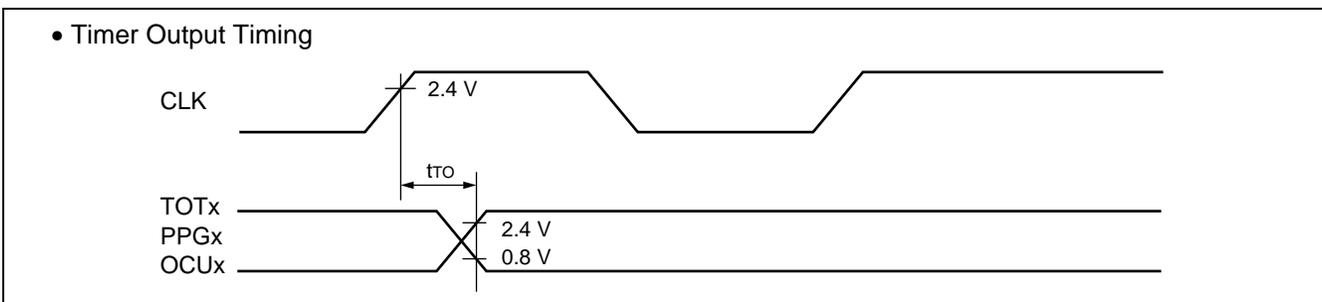


(7) Trigger input timing

($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Pin name | Condi-tions | Value | | Unit | Remarks |
|-------------------|------------|--------------|-------------|------------|-----|---------------|---------------------|
| | | | | Min | Max | | |
| Input pulse width | t_{TRGH} | INT0 to INT3 | — | $5 t_{CP}$ | — | ns | At normal operating |
| | t_{TRGL} | | | 1 | — | μs | In Stop mode |

Note : t_{CP} is machine cycle frequency (ns) . Refer to “ (1) Clock timing”.

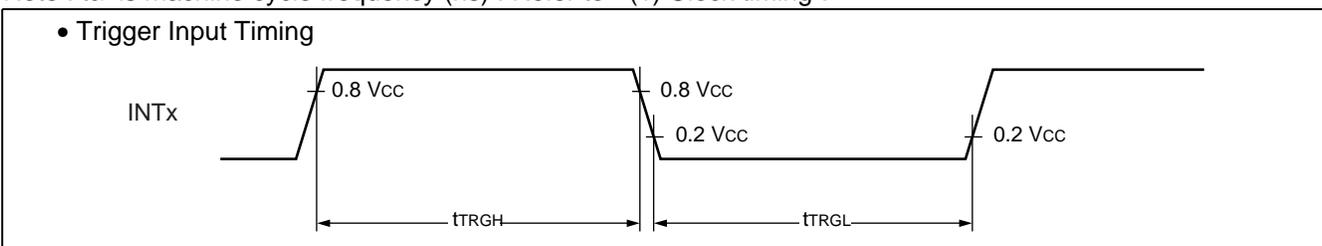

(8) I²C timing

($V_{CC} = V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

| Parameter | Symbol | Conditions | Standard-mode | | Unit |
|---|-------------|---|-------------------|--------------------|---------------|
| | | | Min | Max | |
| SCL clock frequency | f_{SCL} | | 0 | 100 | kHz |
| Hold time (repeated) START condition SDA $\downarrow \rightarrow$ SCL \downarrow | t_{HDSTA} | When power supply voltage of external pull-up resistor is 5.0 V $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | 4.0 | — | μs |
| “L” width of the SCL clock | t_{LOW} | | 4.7 | — | μs |
| “H” width of the SCL clock | t_{HIGH} | When power supply voltage of external pull-up resistor is 3.6 V $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | 4.0 | — | μs |
| Set-up time for a repeated START condition SCL $\uparrow \rightarrow$ SDA \downarrow | t_{SUSTA} | | 4.7 | — | μs |
| Data hold time SCL $\downarrow \rightarrow$ SDA $\downarrow \uparrow$ | t_{HDDAT} | | 0 | 3.45 _{*3} | μs |
| Data set-up time SDA $\uparrow \rightarrow$ SCL \uparrow | t_{SUDAT} | When power supply voltage of external pull-up resistor is 5.0 V $f_{CP}^{*1} \leq 20 \text{ MHz}$, $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | 250 _{*4} | — | ns |
| | | When power supply voltage of external pull-up resistor is 3.6 V $f_{CP}^{*1} \leq 20 \text{ MHz}$, $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | | | |
| Set-up time for STOP condition SCL $\uparrow \rightarrow$ SDA \uparrow | t_{SUSTO} | When power supply voltage of external pull-up resistor is 5.0 V $f_{CP}^{*1} > 20 \text{ MHz}$, $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | 200 _{*4} | — | ns |
| | | When power supply voltage of external pull-up resistor is 3.6 V $f_{CP}^{*1} > 20 \text{ MHz}$, $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | | | |
| Bus free time between a STOP and START condition | t_{BUS} | When power supply voltage of external pull-up resistor is 3.6 V $R = 1.0 \text{ k}\Omega$, $C = 50 \text{ pF}^{*2}$ | 4.7 | — | μs |


*1 : f_{CP} is internal operation clock frequency. Refer to “(1) Clock timing”.

*2 : R, C : Pull-up resistor and load capacitor of the SCL and SDA lines.

*3 : The maximum t_{HDDAT} only has to be met if the device does not stretch the “L” width (t_{LOW}) of the SCL signal.


*4 : Refer to “• Note of SDA and SCL set-up time”.

- Note of SDA and SCL set-up time

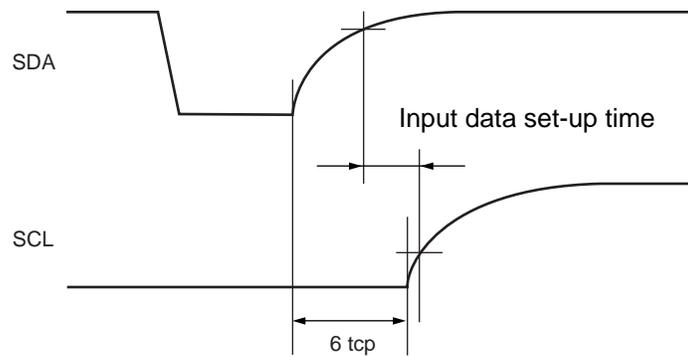

Note : The rating of the input data set-up time in the device connected to the bus cannot be satisfied depending on the load capacitance or pull-up resistor.
Be sure to adjust the pull-up resistor of SDA and SCL if the rating of the input data set-up time cannot be satisfied.

- Timing definition

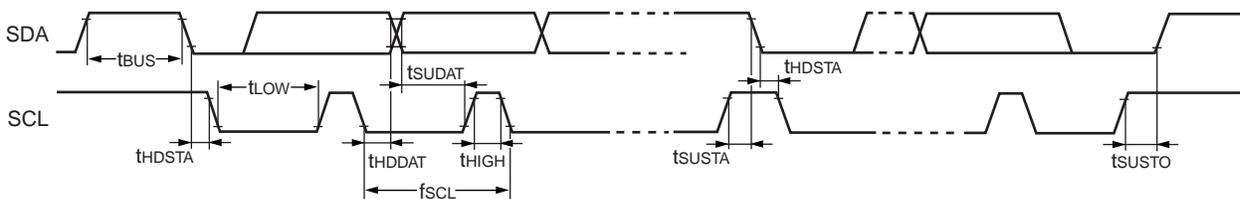

5. A/D Converter

(1) A/D Converter Electrical Characteristics

($V_{CC} = AV_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)

| Parameter | Symbol | Pin name | Conditions | Value | | | Unit | Remarks |
|-------------------------------------|-----------|-------------|------------|---------------------------|---------------------------|---------------------------|---------------|------------------------------------|
| | | | | Min | Typ | Max | | |
| Resolution | — | — | — | — | — | 10 | bit | |
| Total error | — | — | | — | — | ± 3.0 | LSB | |
| Nonlinear error | — | — | | — | — | ± 2.5 | LSB | |
| Differential linear error | — | — | | — | — | ± 1.9 | LSB | |
| Zero transition voltage | V_{OT} | ANO to AN11 | | $AV_{SS} - 1.5\text{LSB}$ | $AV_{SS} + 0.5\text{LSB}$ | $AV_{SS} + 2.5\text{LSB}$ | V | 1 LSB = $(AV_{CC} - AV_{SS})/1024$ |
| Full-scale transition voltage | V_{FST} | ANO to AN11 | | $AV_{CC} - 3.5\text{LSB}$ | $AV_{CC} - 1.5\text{LSB}$ | $AV_{CC} + 0.5\text{LSB}$ | V | |
| Conversion time | — | — | | 8.64*1 | — | — | μs | |
| Sampling time | — | — | | 2 | — | — | μs | |
| Analog port input current | I_{AIN} | ANO to AN11 | | — | — | 10 | μA | |
| Analog input voltage | V_{AIN} | ANO to AN11 | | 0 | — | AV_{CC} | V | |
| Reference voltage | — | AV_{CC} | | 3.0 | — | AV_{CC} | V | |
| Power supply current | I_A | AV_{CC} | | — | 1.4 | 3.5 | mA | |
| | I_{AH} | AV_{CC} | | — | — | 5*2 | μA | |
| Reference voltage supplying current | I_R | AV_{CC} | | — | 94 | 150 | μA | |
| | I_{RH} | AV_{CC} | — | — | 5*2 | μA | | |
| Interchannel disparity | — | ANO to AN11 | — | — | 4 | LSB | | |

*1 : At operating, main clock 25 MHz.

*2 : If A/D converter is not operating, a current when CPU is stopped is applicable (at $V_{CC} - \text{CPU} = AV_{CC} = 3.3 \text{ V}$)


MB90800 Series

(2) Notes on Using A/D Converter

• About the external impedance of analog input and its sampling time

A/D converter with sample & hold circuit. If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the internal sample and hold capacitor is insufficient, adversely affecting A/D conversion precision. Therefore, to satisfy the A/D conversion precision standard, consider the relationship between the external impedance and minimum sampling time and either adjust the resistor value and operating frequency or decrease the external impedance so that the sampling time is longer than the minimum value. And, if the sampling time cannot be sufficient, connect a capacitor of about 0.1 μF to the analog input pin.



• Analog input circuit model

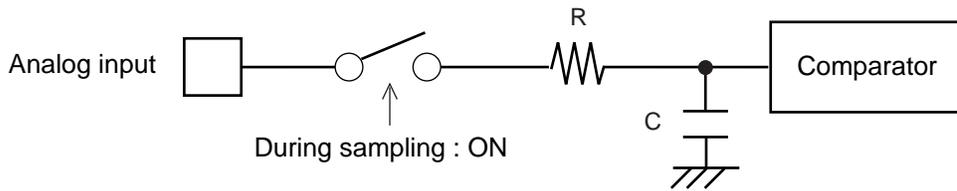

| | R | C |
|-----------------------------------|----------------------|---------------|
| MB90803 (S) | 1.9 k Ω (Max) | 32.3 pF (Max) |
| MB90F804-201(101)/F803(S)/F809(S) | 1.9 k Ω (Max) | 25.0 pF (Max) |
| MB90V800 | 1.9 k Ω (Max) | 32.3 pF (Max) |

Note : The values are reference values.

• The relationship between external impedance and minimum sampling time

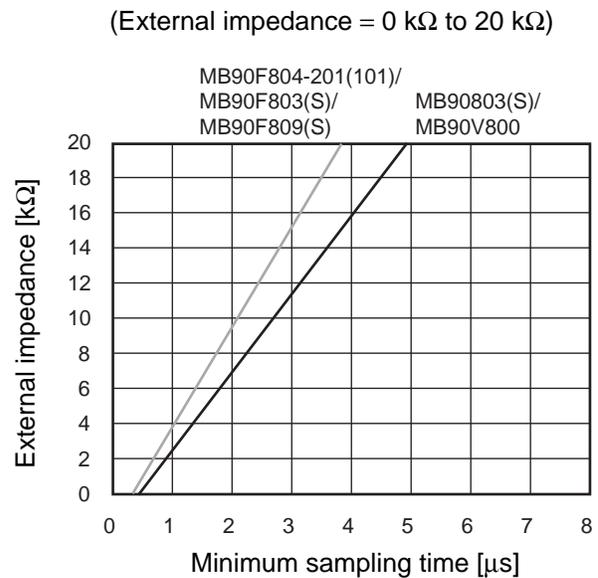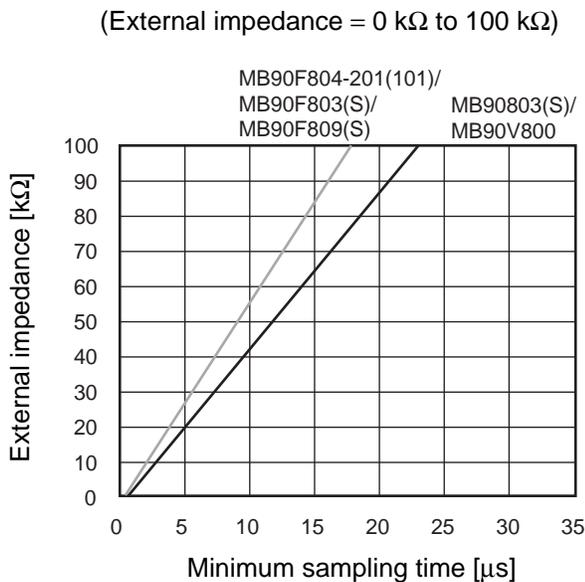

• About errors

As $|AV_{CC} - AV_{SS}|$ becomes smaller, values of relative errors grow larger.

6. Definition of A/D Converter Terms

Resolution

Analog variation that is recognized by an A/D converter.

The 10-bit can resolve analog voltage into $2^{10} = 1024$.

Total error


This shows the difference between the actual voltage and the ideal value and means a total of error because of offset error, gain error, non-linearity error and noise.

Linearity error

Deviation between a line across zero-transition line (00 0000 0000↔00 0000 0001) and full-scale transition line (11 1111 1110↔11 1111 1111) and actual conversion characteristics.



Differential linear error

Deviation of input voltage, which is required for changing output code by 1 LSB, from an ideal value.

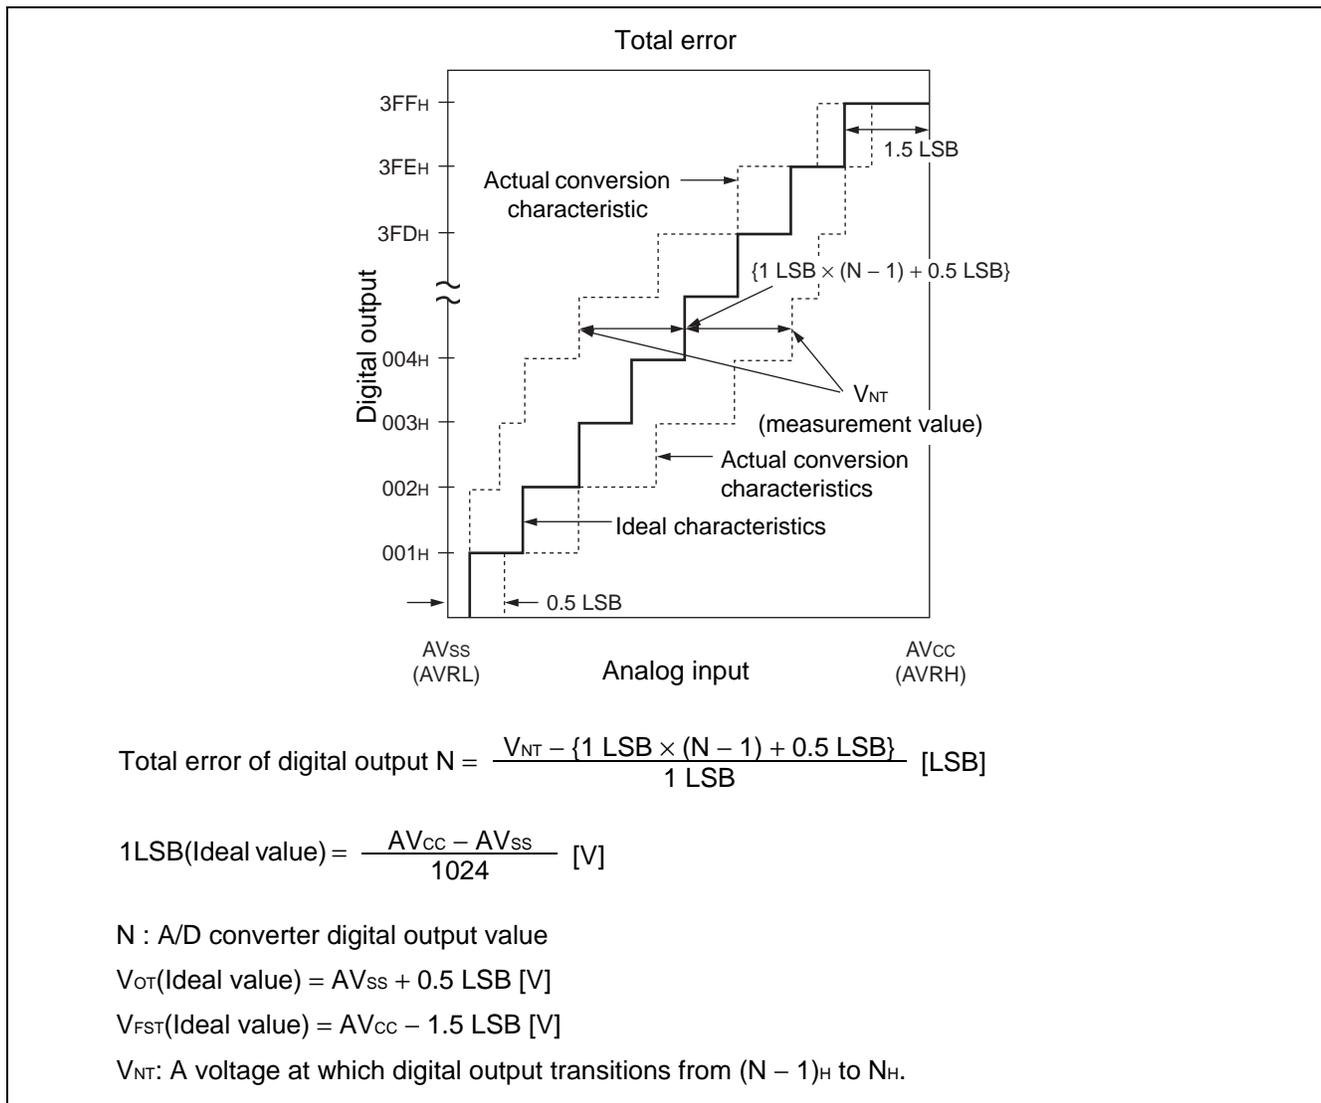

(Continued)

(Continued)

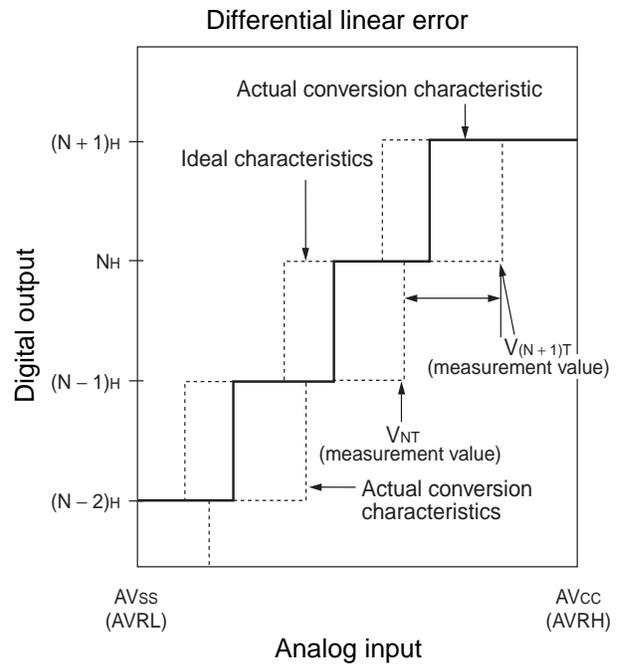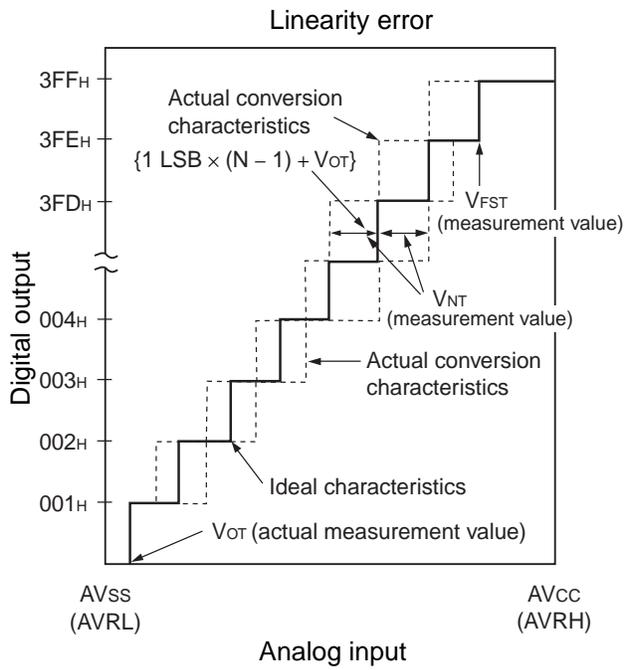

$$\text{Linear error in digital output } N = \frac{V_{NT} - \{1 \text{ LSB} \times (N - 1) + V_{OT}\}}{1 \text{ LSB}} \quad [\text{LSB}]$$

$$\text{Differential linear error in digital output } N = \frac{V_{(N+1)T} - V_{NT}}{1 \text{ LSB}} - 1 \text{ LSB} \quad [\text{LSB}]$$

$$1 \text{ LSB} = \frac{V_{FST} - V_{OT}}{1022} \quad [\text{V}]$$

N : A/D converter digital output value

V_{OT} : Voltage at which digital output transits from 000_H to 001_H.

V_{FST} : Voltage at which digital output transits from 3FE_H to 3FF_H.

7. Flash Memory (MB90F804-101/201, MB90F809/S)

| Parameter | Conditions | Value | | | Unit | Remarks |
|--------------------------------------|---|-------|-----|-----|-------|--|
| | | Min | Typ | Max | | |
| Sector erase time | T _A = + 25 °C V _{CC} = 3.0 V | — | 1 | 15 | s | Excludes 00 _H programming prior to erasure. |
| Chip erase time | | — | 9 | — | | |
| Word (16-bit width) programming time | | — | — | 16 | 3600 | μs |
| Program/erase cycle | — | 10000 | — | — | cycle | |
| Flash memory data retention time | Average T _A = + 85 °C | 20 | — | — | year | * |

* : This value comes from the technology qualification (using Arrhenius equation to translate high temperature measurements into normalized value at + 85 °C).

8. Dual Operation Flash Memory (MB90F803/S)

| Parameter | Conditions | Value | | | Unit | Remarks |
|--------------------------------------|--|-------|-----|-----|-------|--|
| | | Min | Typ | Max | | |
| Sector erase time (4 Kbytes sector) | T _A = +25 °C V _{CC} = 3.0 V | — | 0.2 | 0.5 | s | Excludes 00 _H programming prior to erasure. |
| Sector erase time (16 Kbytes sector) | | — | 0.5 | 7.5 | | |
| Chip erase time | | — | 4.6 | — | | |
| Word (16-bit width) programming time | | — | — | 64 | 3600 | μs |
| Program/erase cycle | — | 10000 | — | — | cycle | |
| Flash memory data retention time | Average T _A = + 85 °C | 20 | — | — | year | * |


* : This value comes from the technology qualification (using Arrhenius equation to translate high temperature measurements into normalized value at + 85 °C).


MB90800 Series

■ ORDERING INFORMATION

| Part number | Package | Remarks |
|--|---------------------------------------|--|
| MB90F804-101PF-G MB90F804-201PF-G MB90F803PF-G MB90F803SPF-G MB90F809PF-G MB90F809SPF-G | 100-pin plastic QFP (FPT-100P-M06) | With sub clock: Products without "S" suffix 201 option products Without sub clock: Products with "S" suffix 101 option products |
| MB90803PF-G MB90803SPF-G | | |

PACKAGE DIMENSION
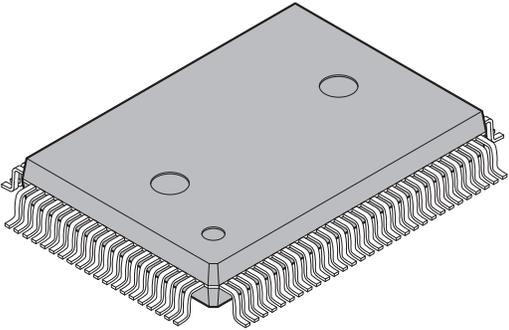
| | | |
|--|--------------------------------|---------------------|
| <p>100-pin plastic QFP</p>  <p>(FPT-100P-M06)</p> | Lead pitch | 0.65 mm |
| | Package width × package length | 14.00 × 20.00 mm |
| | Lead shape | Gullwing |
| | Sealing method | Plastic mold |
| | Mounting height | 3.35 mm MAX |
| | Code (Reference) | P-QFP100-14×20-0.65 |
| | | |

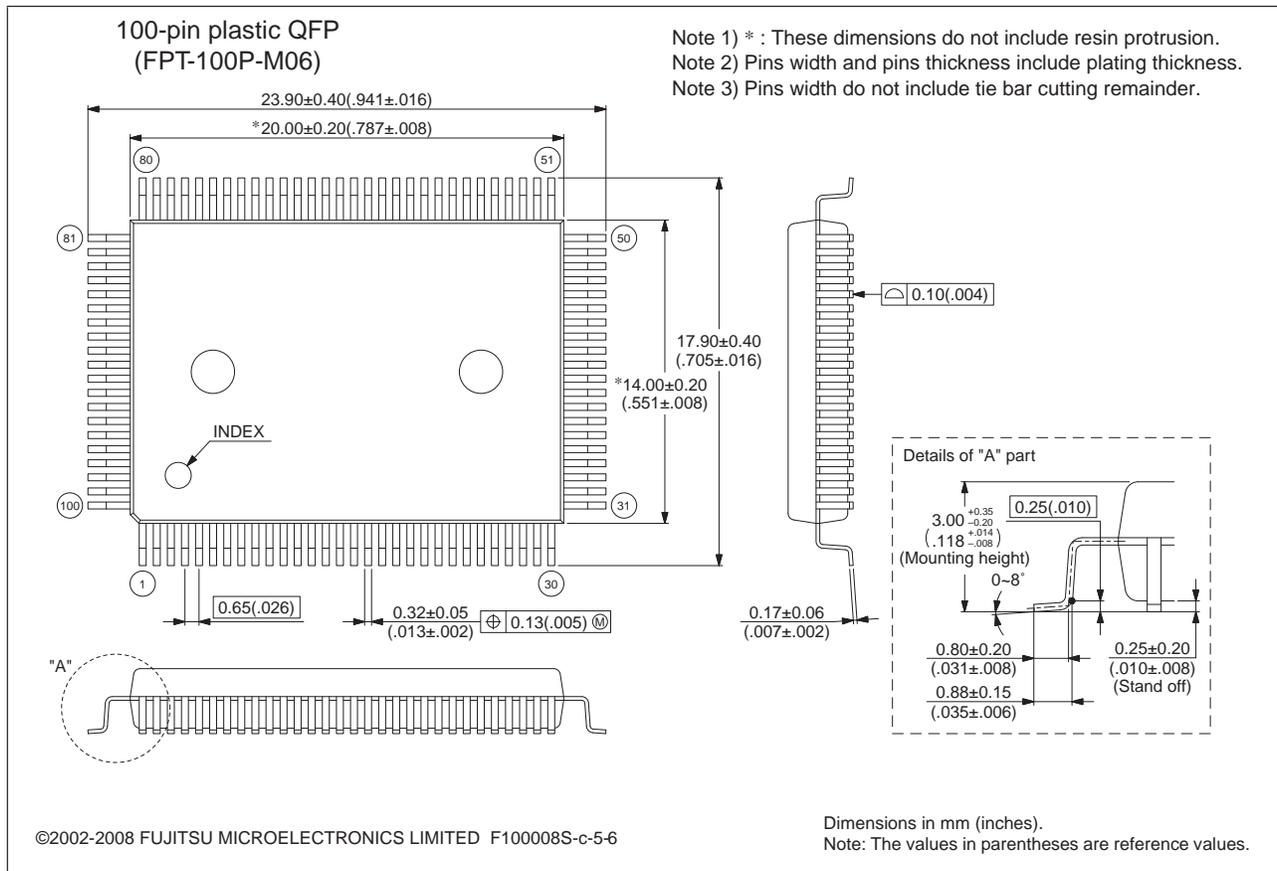

Please check the latest Package dimension at the following URL.
<http://edevice.fujitsu.com/package/en-search/>

MB90800 Series

■ MAIN CHANGES IN THIS EDITION

| Page | Section | Change Results |
|------|--------------|---|
| 17 | ■ MEMORY MAP | Corrected "Address #2" for part number MB90F809/S. FC8000 _H → FD0000 _H |

The vertical lines marked in the left side of the page show the changes.

MEMO

MEMO

MEMO

MB90800 Series

FUJITSU MICROELECTRONICS LIMITED

Shinjuku Dai-Ichi Seimei Bldg., 7-1, Nishishinjuku 2-chome,
Shinjuku-ku, Tokyo 163-0722, Japan
Tel: +81-3-5322-3329
<http://jp.fujitsu.com/fml/en/>

For further information please contact:

North and South America

FUJITSU MICROELECTRONICS AMERICA, INC.
1250 E. Arques Avenue, M/S 333
Sunnyvale, CA 94085-5401, U.S.A.
Tel: +1-408-737-5600 Fax: +1-408-737-5999
<http://www.fma.fujitsu.com/>

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LTD.
151 Lorong Chuan,
#05-08 New Tech Park 556741 Singapore
Tel : +65-6281-0770 Fax : +65-6281-0220
<http://www.fmal.fujitsu.com/>

Europe

FUJITSU MICROELECTRONICS EUROPE GmbH
Pittlerstrasse 47, 63225 Langen, Germany
Tel: +49-6103-690-0 Fax: +49-6103-690-122
<http://emea.fujitsu.com/microelectronics/>

FUJITSU MICROELECTRONICS SHANGHAI CO., LTD.

Rm. 3102, Bund Center, No.222 Yan An Road (E),
Shanghai 200002, China
Tel : +86-21-6146-3688 Fax : +86-21-6335-1605
<http://cn.fujitsu.com/fmc/>

Korea

FUJITSU MICROELECTRONICS KOREA LTD.
206 Kosmo Tower Building, 1002 Daechi-Dong,
Gangnam-Gu, Seoul 135-280, Republic of Korea
Tel: +82-2-3484-7100 Fax: +82-2-3484-7111
<http://kr.fujitsu.com/fmk/>

FUJITSU MICROELECTRONICS PACIFIC ASIA LTD.

10/F., World Commerce Centre, 11 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Tel : +852-2377-0226 Fax : +852-2376-3269
<http://cn.fujitsu.com/fmc/en/>

Specifications are subject to change without notice. For further information please contact each office.

All Rights Reserved.

The contents of this document are subject to change without notice.

Customers are advised to consult with sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of FUJITSU MICROELECTRONICS device; FUJITSU MICROELECTRONICS does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information.

FUJITSU MICROELECTRONICS assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of FUJITSU MICROELECTRONICS or any third party or does FUJITSU MICROELECTRONICS warrant non-infringement of any third-party's intellectual property right or other right by using such information. FUJITSU MICROELECTRONICS assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that FUJITSU MICROELECTRONICS will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

Exportation/release of any products described in this document may require necessary procedures in accordance with the regulations of the Foreign Exchange and Foreign Trade Control Law of Japan and/or US export control laws.

The company names and brand names herein are the trademarks or registered trademarks of their respective owners.