


This drawing is the property of
Tusonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tusonix Inc.

MARKETING SALES DRAWING




DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

DIMENSIONS IN METRIC - []

ALL METAL PARTS SILVER PLATED

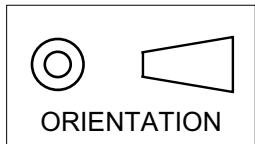

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

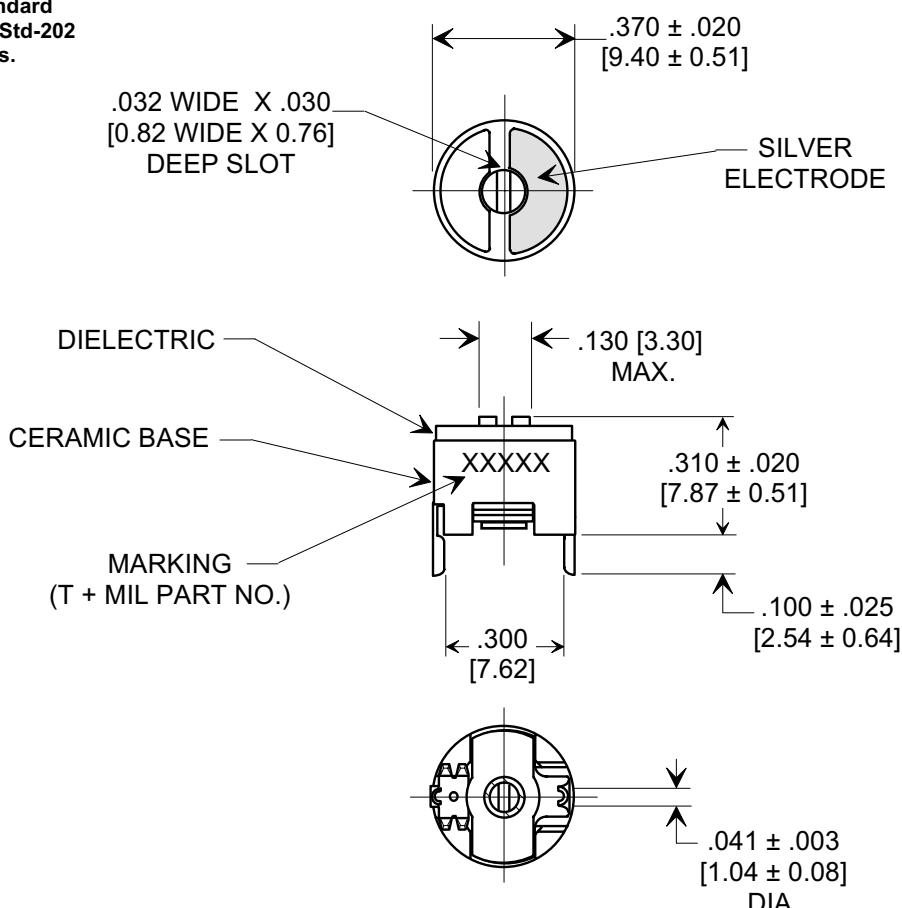

TYPICAL MOUNTING
HOLE LAYOUT

SPECIFICATIONS

TUSONIX PART NO.	538-054 A 5.5 - 18
Capacitance Range:	5.5 - 18 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE A
Working Voltage:	350 VDC AT + 85°C
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/4C CV31A180	

TOLERANCES
unless otherwise specified

2 PLC.
DECIMAL ± //

3 PLC.
DECIMAL ± .010 [0.25]

ANGLES ± //

Title

CERAMIC
TRIMMER

Drawn S.M. 06-17-99

Scale 2 X

Approved H.R. 06-17-99

A 538-054 A 5.5 - 18