

Multiple relay module, Screw connection, With 8 miniature relays, 2 CO contacts each, Plugged in, With illuminated display, Positive switching, Input voltage: 24 VDC

### Business data

Article number	6155.2
Article name	RIM8/2W/24V+
GTIN (EAN)	4044211072391
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	385.2 g
Weight per piece (including packaging)	459 g
Unit of weight	G
Customs number	85364900
Country of origin	NL
Product description	Relay module

### Technical data

#### Dimensions

Length	87 mm
Width	151 mm
Height	72 mm

#### Ratings

Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.08 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Torque	0.6 Nm

#### Input data

Input voltage	24 VDC
Number of channels	8
Plus switching (source)	1
Power consumption	0.5 W
reverse-polarity protection diode	1

#### Output data

Switching voltage / switching voltage max.	250 / 250 VAC
Continuous current max. / Inrush current max.	4 / 8 A
Contact configuration	2 CO contacts
Switching capacity, max.	1250 VA
Electrical lifespan (AC1)	20x10 <sup>7</sup>
Mechanical lifespan	10x10 <sup>7</sup>

---

### Technical data

---

#### Materials

Contact material	AgNi 90/10
Working temperature, min.	-20 °C
Working temperature, max.	55 °C

#### Further technical data

Protection class	IP20
Insulation voltage coil/contact	4 kV
Status display red	✓
Free-wheel diode	✓
Response/release time	9 / 7 ms
Pinning	5 mm
Operating voltage indicator LED	✓
Pluggable relay	✓

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-01-07
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Approvals

---

#### Standards and regulations

---

CE compliant


yes

Standards / specifications

DIN VDE 0110 / EN 50178

---

### Media

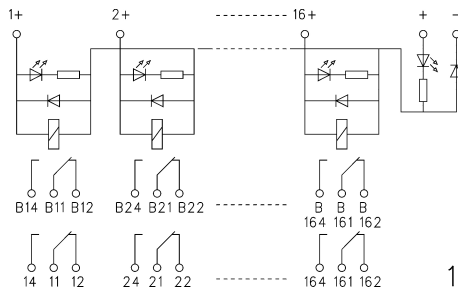

---

### Accessories

---