
DESCRIPTION: 15 POS HIGH DENSITY OVER (2) PS/2

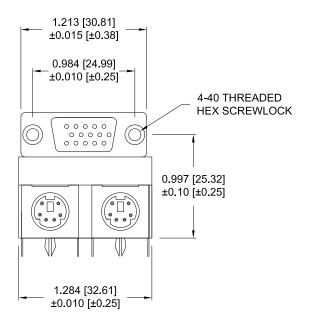

## SPECIFICATIONS: ELECTRICAL:

CURRENT RATING: 3 AMPS

INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,00VAC FOR 60SEC.
CONTACT RESISTANCE: 25MilliOHMS Max.

OPERATING TEMPERATURE: -55° ~ +105° C

## MATERIAL:

CONTACTS: BRASS

INSULATOR: PBT, UL94V-0

PROCESS TEMPERATURE: 230°C HIGH DENSITY D-SUB: BLUE MINI-DIN = LEFT PORT: PURPLE


RIGHT PORT: GREEN

SHELL: COLD ROLL STEEL

## PLATING:

CONTACTS: GOLD FLASH

SHELL: NICKEL

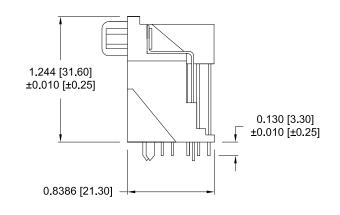

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

DRAWN:



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

PAM JENKINS 11-15-05

SCALE: SHEET OF NTS 1 4

DATE:


REV


9

NorComp

999-H15-PS2L571

ROHS COMPLIANT

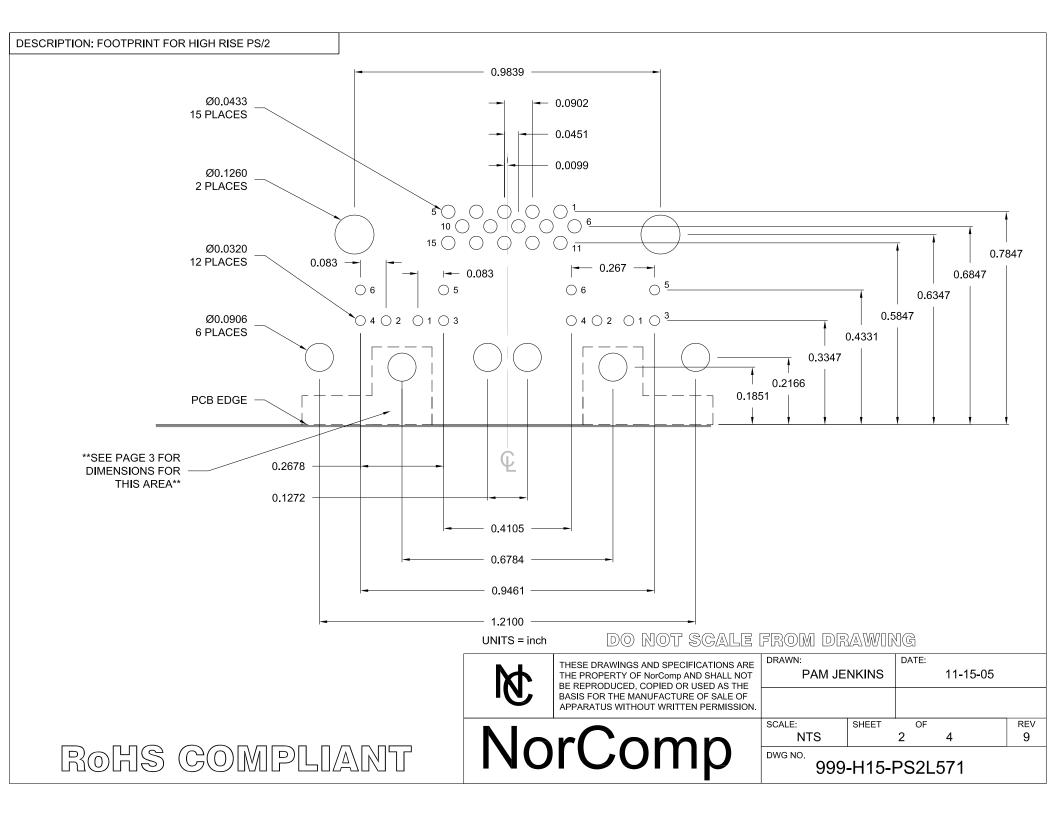

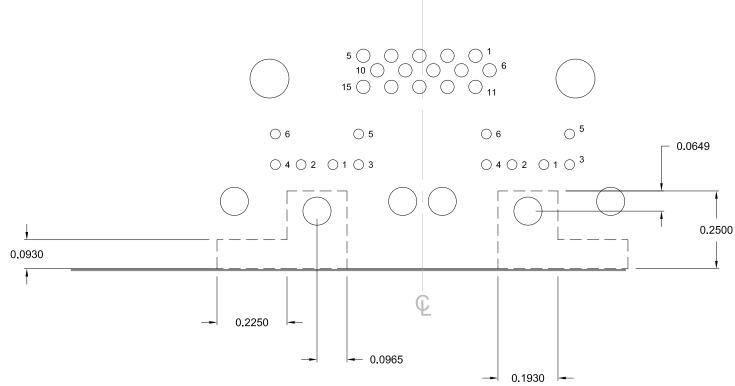

UNITS = inch

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

PAM JENKINS DATE:
11-15-05


SCALE: SHEET OF REV

RoHS COMPLIANT

NorComp

NTS 3 4 9

DWG NO. 999-H15-PS2L571

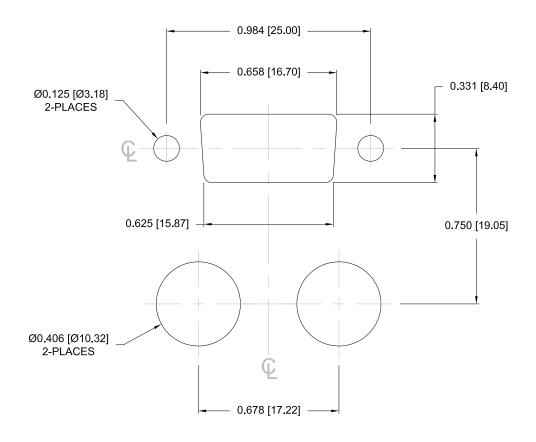

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOrComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

PAM JENKINS DATE:

11-15-05

SCALE: SHEET OF REV

9

ROHS COMPLIANT

NorComp

999-H15-PS2L571

NTS